





booster

**COMFORTABLE
& ECONOMICAL**

INSTALLATION WITH
ACRYLIC GLUE

.....

ALL USES FLOOR

.....

booster WOOD





1



2



3



4



5



6

1-Jersey Clear

2 m: Code: 1371 1894 - EAN: 3475710337956
3 m: Code: 1353 1894 - EAN: 3475710352867
4 m: Code: 1391 1894 - EAN: 3475710336638

2-Nordic Beige

2 m: Code: 1371 1689 - EAN: 3475710317231
4 m: Code: 1391 1689 - EAN: 3475710317194

3-Fabrik White

2 m: Code: 1371 1921 - EAN: 3475710345104
3 m: Code: 1353 1921 - EAN: 3475710372322
4 m: Code: 1391 1921 - EAN: 3475710339622

4-Farm Pecan

2 m: Code: 1371 1393 - EAN: 3475710319808
4 m: Code: 1391 1393 - EAN: 3475710303043

5-Santafe Pearl

2 m: Code: 1371 1873 - EAN: 3475710337932
4 m: Code: 1391 1873 - EAN: 3475710334771

6-Hudson Pearl

2 m: Code: 1371 1880 - EAN: 3475710357343
3 m: Code: 1353 1880 - EAN: 3475710352935
4 m: Code: 1391 1880 - EAN: 3475710357299

7-Atelier Silver Grey

2 m: Code: 1371 1948 - EAN: 3475710369469
4 m: Code: 1391 1948 - EAN: 3475710355257



7

1948 - Atelier Silver Grey



1



2



3



4



5



6

1-Hudson Blond

2 m: Code: 1371 1887 - EAN: 3475710357336
3 m: Code: 1353 1887 - EAN: 3475710352928
4 m: Code: 1391 1887 - EAN: 3475710357282

2-Boston Blond

2 m: Code: 1371 1618 - EAN: 3475710316807
3 m: Code: 1353 1618 - EAN: 3475710352874
4 m: Code: 1391 1618 - EAN: 3475710317071

3-Boston Pecan

2 m: Code: 1371 1722 - EAN: 3475710316821
3 m: Code: 1353 1722 - EAN: 3475710352881
4 m: Code: 1391 1722 - EAN: 3475710317095

4-Chalet Pecan

2 m: Code: 1371 1516 - EAN: 3475710316869
4 m: Code: 1391 1516 - EAN: 3475710317132

5-Hudson Brown

2 m: Code: 1371 1959 - EAN: 3475710357329
3 m: Code: 1353 1959 - EAN: 3475710352911
4 m: Code: 1391 1959 - EAN: 3475710357275

6-Chelsea Smoked

2 m: Code: 1371 1294 - EAN: 3475710359569
4 m: Code: 1391 1294 - EAN: 3475710358951



1887 - Hudson Blond



1-Chelsea Blond

2 m: Code: 1371 1364 - EAN: 3475710359576
4 m: Code: 1391 1364 - EAN: 3475710358968

2-Manitoba Hêtre

2 m: Code: 1372 0402 - EAN: 3475710319587
4 m: Code: 1392 0402 - EAN: 3475710319471

3-Toronto Clair

2 m: Code: 1371 0762 - EAN: 3475710359545
4 m: Code: 1391 0762 - EAN: 3475710358937

booster CERAMIC



1919 - Spa Silver Grey

NEW




1



2



3

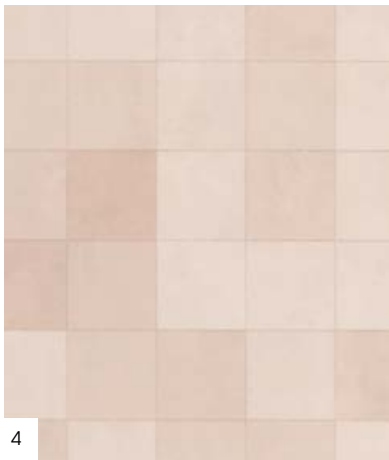

4



5



6



7



8



9

1-Memphis White

2 m: Code: 1371 2095 - EAN: 3475710395680
4 m: Code: 1391 2095 - EAN: 3475710395659

2-Memphis Grey

2 m: Code: 1371 2096 - EAN: 3475710395697
4 m: Code: 1391 2096 - EAN: 3475710395666

3-Memphis Ocre

2 m: Code: 1371 2097 - EAN: 3475710395703
4 m: Code: 1391 2097 - EAN: 3475710395673

4-Spa Cream

2 m: Code: 1399 1920 - EAN: 3475710362132
3 m: Code: 1578 1920 - EAN: 3475710362026
4 m: Code: 1397 1920 - EAN: 3475710357886

5-Quartzite Sand

2 m: Code: 1372 1946 - EAN: 3475710358104
3 m: Code: 1382 1946 - EAN: 3475710367403
4 m: Code: 1392 1946 - EAN: 3475710354960

6-Patio Terracotta

2 m: Code: 1372 1471 - EAN: 3475710319594
3 m: Code: 1382 1471 - EAN: 3475710367427
4 m: Code: 1392 1471 - EAN: 3475710319488

7-Spa Silver Grey

2 m: Code: 1385 1919 - EAN: 3475710361623
4 m: Code: 1375 1919 - EAN: 3475710362248

8-Patio Silver Grey

2 m: Code: 1371 1958 - EAN: 3475710357312
3 m: Code: 1353 1958 - EAN: 3475710364310
4 m: Code: 1391 1958 - EAN: 3475710357268

9-Damier Black & White

2 m: Code: 1399 0015 - EAN: 3475710362095
3 m: Code: 1578 0015 - EAN: 3475710362019
4 m: Code: 1397 0015 - EAN: 3475710357831

booster

ALL OVER






1




2

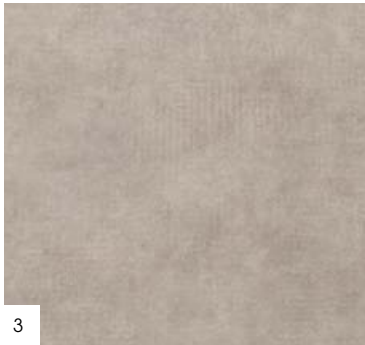


3



4

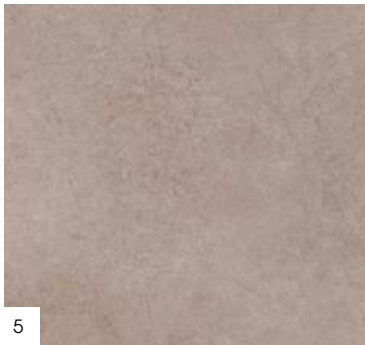

5

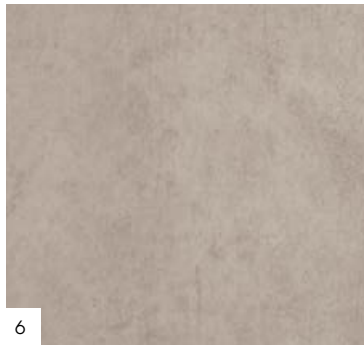

6



7



8

1-City Light Grey

2 m: Code: 1399 1206 - EAN: 3475710362125
4 m: Code: 1397 1206 - EAN: 3475710357862

2-Dragée Coquillage

2 m: Code: 1399 0085 - EAN: 3475710362088
3 m: Code: 1578 0085 - EAN: 3475710362002
4 m: Code: 1397 0085 - EAN: 3475710357824

3-Broadway Beige

2 m: Code: 1399 1596 - EAN: 3475710362071
3 m: Code: 1578 1596 - EAN: 3475710361708
4 m: Code: 1397 1596 - EAN: 3475710357817

4-Broadway White

2 m: Code: 1399 1606 - EAN: 3475710362118
3 m: Code: 1578 1606 - EAN: 3475710361715
4 m: Code: 1397 1606 - EAN: 3475710357855

5-Used Clear

2 m: Code: 1371 1935 - EAN: 3475710346514
4 m: Code: 1391 1935 - EAN: 3475710346507

6-Calvi Beton

2 m: Code: 1371 1729 - EAN: 3475710319792
3 m: Code: 1353 1729 - EAN: 3475710352898
4 m: Code: 1391 1729 - EAN: 3475710303036

7-Broadway Storm


2 m: Code: 1399 1595 - EAN: 3475710362064
4 m: Code: 1397 1595 - EAN: 3475710357800

8-Madras Silver

2 m: Code: 1385 1593 - EAN: 3475710361616
4 m: Code: 1375 1593 - EAN: 3475710362231

9-Cork Naturel

2 m: Code: 1399 0027 - EAN: 3475710362057
3 m: Code: 1578 0027 - EAN: 3475710361692
4 m: Code: 1397 0027 - EAN: 3475710357794

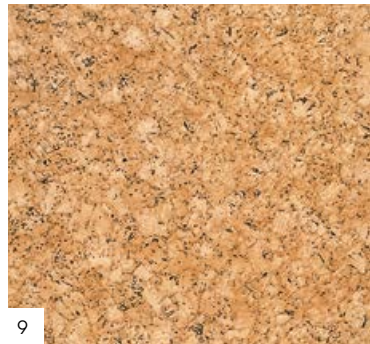

9

1595 - Broadway Storm

TECHNICAL CHARACTERISTICS

			Diamalite	Grain/Diam Grain
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm		2.60
Wearlayer thickness	EN ISO 24340 (EN 429)	mm		0.25
Weight / Mass per unit area	EN ISO 23997 (EN 430)	g/sqm	1500	1725
Width of sheet	EN ISO 24381 (EN 426)	m		2 / 3 / 4
Length of sheet	EN ISO 24341 (EN 426)	ml		± 30
CLASSIFICATION				
Norm / Product specification	-	-		EN ISO 26986
European classification	EN ISO 10874 (EN 685)	class		22
Sound insulation	EN ISO 717/2	dB		19
Room impact noise	NF S 31074	class		A
Fire rating - Classification - Wood support permanent laying	EN 13501-1	class		C _{fl} -s1
Slip resistance wet: ramp test with oil	DIN 51 130	class	-	R10
PERFORMANCES				
Wear group	EN 660-2	group		T
Dimensional stability after exposure to heat	EN ISO 23999 (EN 434)	%		0.05
Residual indentation (average value measured)	EN ISO 24343-1 (EN 433)	mm		0.25
Residual indentation (requirement)	EN ISO 24343-2	mm		< 0.35
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25
Colour fastness	EN 20 105-B02	degree		> 6
Surface treatment	-	-	Diamalite	Pureclean
Guarantee		year		10
ENVIRONMENT				
TVOC rate 28 days	EN ISO 16000-6	µg/m ³		< 100
French norm	-	-		A+
Floorscore (US norm)	-	-		OK

CE MARKING



EN 14041



Areas of use: domestic use




HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning

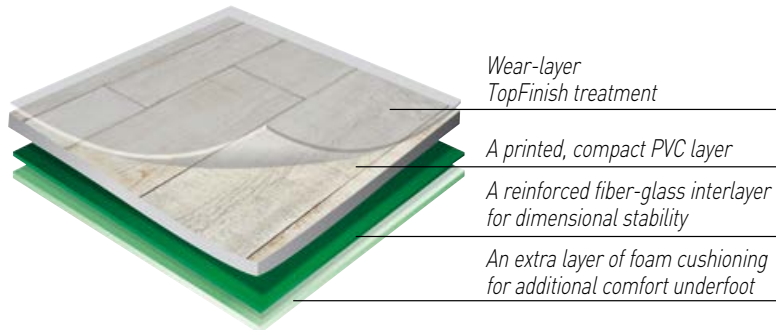

*Wear-layer
TopFinish treatment*

A printed, compact PVC layer

*A reinforced fiber-glass interlayer
for dimensional stability*

*An extra layer of foam cushioning
for additional comfort underfoot*

LAYING

The subfloor must be smooth, clean, dry, undamaged and flat.

Recommendations: unroll the floorcovering 24 hours before laying.

The floor covering should not be laid in a room if the temperature is below 15°C.

Laying on underfloor heating is possible (up to 28°C).

Weld the joints (cold-treatment product) to ensure good water-tightness.

If permanent laying with glue: use a single stick acrylic adhesive (approximately 250g/sq. m).

Use a finely-notched trowel.

CLEANING & CARE

Regular cleaning with a vacuum cleaner, dust mop or a wet cloth.

Cleaning: with water and a neutral detergent, rinse with clean water.

Stain removal: White Spirit removes almost all stains.

Do not use solvents.

Precautions: do not use floor wax.

Avoid rubber leg caps and casters.

Replace with plastic caps and polyamide casters.

Protect the bases and legs of your waxed furniture with a felt disc.

booster

**COMFORTABLE
& ECONOMICAL**

**INSTALLATION WITH
ACRYLIC GLUE**

ALL USES FLOOR