




Collection  
2026

## Wall protection & decoration Handrails

**Spm**<sup>®</sup>  
wall protection



## Discover our wall protection and decoration products.

From protective panels and handrails to signage and corner guards, SPM offers innovative, decorative and eco-friendly solutions to protect, enhance and preserve public infrastructure.



5

WHY OPT FOR PROTECTION?



34

WALL PROTECTION



70

CORNER PROTECTION




6

THE BENEFITS OF SPM SOLUTIONS



60

DOOR PROTECTION



82

HANDRAILS



10

AN ENVIRONMENTALLY-FRIENDLY RANGE



68

TOOLS & ADHESIVES



30

RANGE OF COLOURS



12 - 29

SEGMENT SELECTION GUIDE

96

PHOTO GALLERY

110

COLOUR SUMMARY



# ABOUT US

For over 40 years, SPM, based in Toulouse, France, has specialised in wall protection and handrails, developing innovative, decorative and eco-responsible solutions to protect, enhance and maintain infrastructures open to the public, such as:

- Education;
- Healthcare;
- Housing;
- Hospitality;
- Sport;
- Industry;
- Shops;
- ...

  
MADE IN  
FRANCE



# WHY OPT FOR PROTECTION?



## SUSTAINABLE RENOVATION

FIND OUT MORE >



## REDUCED COSTS

FIND OUT MORE >



## ENHANCE

FIND OUT MORE >



## LONG-TERM RESISTANCE

FIND OUT MORE >



## NO-FUSS INSTALLATION

FIND OUT MORE >



Before

## ADVANTAGES OF THE SPM SOLUTION

- Proven and certified resistance;
- Compliant with fire regulations Bs1d0 and Bs2d0;
- Specialist adhesives and accessories;
- 100% recyclable materials;
- Standard or made-to-measure systems.

Whatever the problem or the need of the establishment, many SPM solutions can be prescribed.

# THE BENEFITS OF SPM SOLUTIONS



## BS1D0 & BS2D0 REACTION TO FIRE

FIND OUT MORE >



## RESISTANCE TO IMPACTS

FIND OUT MORE >



## SCRATCH RESISTANCE

FIND OUT MORE >

## GOOD TO KNOW!

SPM has developed a specific adhesive, MS POLYMER:

- Ideal for wet rooms;
- 0 tacking time during installation: **quick installation**;
- **Reduces wall panel expansion:** up to 4 times;
- Panel installation process **patented**



# THE BENEFITS OF SPM SOLUTIONS



## RESISTANCE TO STAINS

FIND OUT MORE >



## 100% ANTIBACTERIAL MATERIAL

FIND OUT MORE >

## GOOD TO KNOW!



- The handrails are fitted with bactericidal joints.
- Option: bactericidal treatment available on request, on all colours in the DECOCHOC and DECOCLEAN ranges and on all handrails. Consult us.

Tests carried out on contamination from human flora (E.Coli) and environmental flora Pseudomonas aeruginosa according to test report no. 08112803 - NOSOCO.TECH laboratories

# THE BENEFITS OF SPM SOLUTIONS



## VIRUCIDAL ACTIVITY

[FIND OUT MORE >](#)



## CONTRIBUTING TO AIRBORNE PARTICULATE CLEANLINESS

[FIND OUT MORE >](#)



## NUCLEAR DECONTAMINATION

[FIND OUT MORE >](#)



# THE BENEFITS OF SPM SOLUTIONS



## FOOD CONTACT

[FIND OUT MORE >](#)



## ATEC

[FIND OUT MORE >](#)



## DSDC-CERTIFIED COLOURS

[FIND OUT MORE >](#)



## PLUS POINTS MIX & MATCH WALL/ FLOOR!

SPM wall protection rails, panels, corner protections and handrails work perfectly with Gerflor vinyl floors and LVT tiles: a valuable asset for projects with a consistent and highly sustainable design.



# A RANGE THAT RESPECTS THE ENVIRONMENT

SPM has always considered its customers and the environment as absolute priorities. Our aim is to offer products that are more environmentally friendly, by working on each step of the product's life cycle, from design to product, use and decommissioning:

## WALL PROTECTION AS PART OF LOW-CARBON PROJECTS



### EXEMPLARY CARBON FOOTPRINT

7.62 kg eq. CO<sub>2</sub>/m<sup>2</sup>



### SERVICE LIFE UP TO 25 YEARS


Our panels have a proven average service life of 25 years!



### VERIFIED EPD

Environmental Product Declarations (EPD) are used to measure and compare environmental impacts (particularly the carbon footprint at each stage in the product's life).

**They are produced by an independent laboratory.** Available on request.

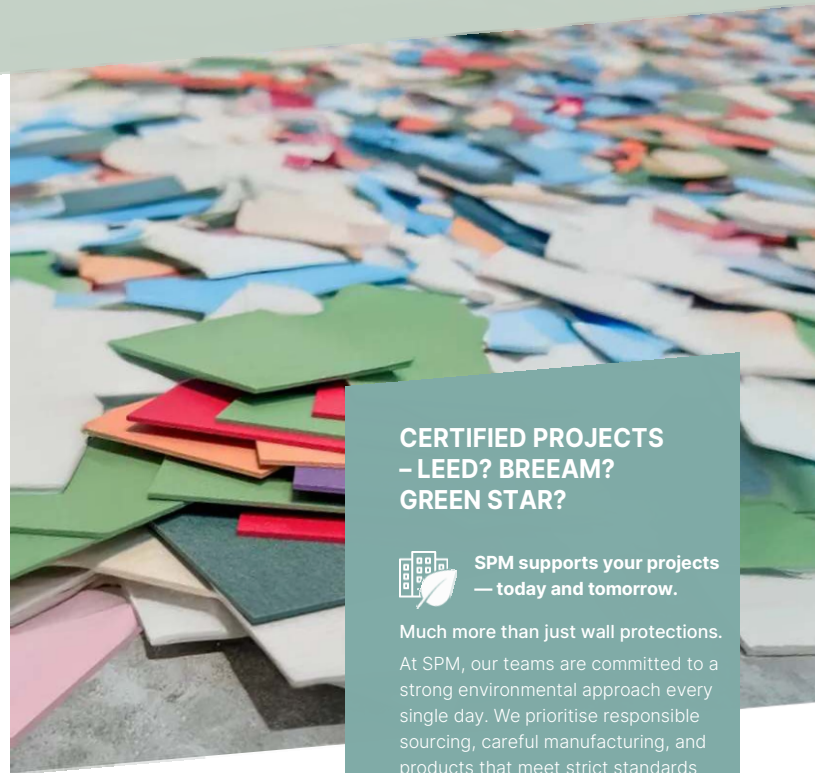

### CERTIFIED PROJECTS – LEED? BREEAM? GREEN STAR?



**SPM supports your projects — today and tomorrow.**

Much more than just wall protections.

At SPM, our teams are committed to a strong environmental approach every single day. We prioritise responsible sourcing, careful manufacturing, and products that meet strict standards — with a unique recycled content in our panels and exemplary service, both locally and internationally.

# A RANGE THAT RESPECTS THE ENVIRONMENT



Decochoc panel has one of the **best carbon footprints on the market** for wall protection: 7.62 kg eq. CO<sub>2</sub>/m<sup>2</sup>.



Our wall protection panels include on average **24% recycled material**.



Our products **do not contain any of the heavy metals** such as lead, cadmium, arsenic, tin, PBT or BPA.



Our products **do not contain any substance** on the REACH restrictions list.



SPM offers a **cutting service** that avoids unnecessary offcuts or cuts on site.



Our products are easy to clean and consume **less water and detergent products**.



Our panels have a proven average service life of **25 years**.



Our materials, mainly PVC and aluminium, are **100% recyclable**.



All production offcuts from SPM's workshops are reintegrated into future manufacturing. Sustainability, from start to finish!



SPM products can be integrated into building projects that are part of a **High Environmental Quality approach** (LEED, BREEAM, etc.).

# 24%

OF RECYCLED MATERIAL

## SPM innovation

### Did you know?

SPM wall protection panels contain **24% recycled PVC on average**. And without any compromise:

- Bs2d0 reaction to fire;
- High performance;
- Resistance to impacts.



We recommend using **SPM solvent-free adhesives**. They present **no risk to the health of users or to the environment**.



Our products are tested in accordance with **ISO 16000-6** and have a level of less than **15 µg/m<sup>3</sup>** after 28 days, which is tiny compared to the required threshold.



Our panels have been approved by the Greenguard Gold label, for their **low emissions, guaranteeing excellent indoor air quality**.

## HOSPITALS - CLINICS - RETIREMENT HOMES AND DISABILITY CENTRES



**MAGNIN CLINIC - NEW CALEDONIA**  
Decochoc panel/ Escort handrail/Comega corner protectors  
SANAE Architecture - Photographer Eric Dell'Erba



**PAULE DE VIGUIER HOSPITAL - TOULOUSE - FRANCE**  
Decoprint panels/Contact plate/Impact wall protection rails  
Architect Groupe Kardham/Artist Stéphanie Ledoux



**AL NOOR HOSPITAL - ABU DHABI**  
LineaTouch LED handrail/Decochoc panel



**CENTRE DE CANCEROLOGIE DE LA SARTHE -  
LE MANS - FRANCE**  
Impact wall protection rails



**IAC INSTITUT AQUITAIN DU COEUR - FRANCE**  
Decochoc panels




**SAINTE ANNE HOSPITAL - GHU PARIS - FRANCE**  
Decochoc panels



### Hospital design

SPM colours are certified by the DSDC.

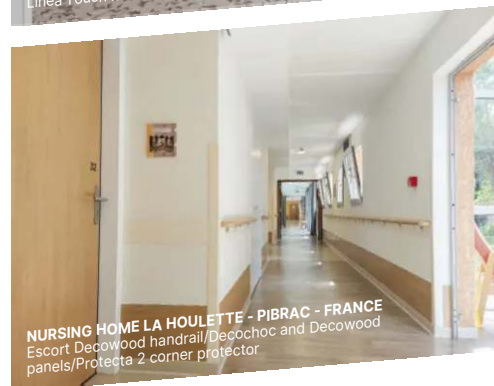





# RETIREMENT HOMES - DISABILITY-ADAPTED FACILITIES

Worlds where quality of life is an issue for residents

## Your concerns

- Comfort.
- Ergonomics.
- Living environment.
- Wall protection & decoration.

<b>TRAFFIC</b>	Moderate traffic
	Lift
	Lift landing
<b>HOUSING AND ROOM SERVICE</b>	Room
	Shower room
	Communal toilets
<b>SHARED PREMISES</b>	Residents' dining room, entertainment rooms
	Relaxation and entertainment room
<b>CONSULTATION AND TREATMENT ROOMS</b>	Infirmery
	Consultation room
	Physiotherapy, occupational therapy and functional rehabilitation room
<b>TECHNICAL ROOMS</b>	Storage of products (care products, nappies) and equipment
	Laundry, linen storage room
	Central kitchen and ancillary rooms
<b>LOGISTICS ZONES AND CAR PARKS</b>	Traffic
	Storage
	Car park

WALL PROTECTION																		
Decochoc (side-by-side, silicone joint)	Decochoc (thermo-welded)	Decoclean	Decowood/Decotrend - Panels	Decofresc - Decorative frescoes	Decoprint	Decochoc Staro	Decosign - Customised signage	Contact 350	Contact 200	Linea Beckit	Linea Punch Neo	Impact 200	Impact 120	Impact 60	Punch'Inox	Plac'Inox	ElastoPunch 200E	ElastoPunch 100D
●			●		○	○	●	●	●		●	●	○					
●					○	○	●				●	●	●					
					○	○	○					●	●	○				
●			●		○	○	●	○	○								●	
●			●	●	○	○	●	●	○		●	●	●				●	
●					○	○	●	●					●	○				
●	○	○	○	○	○	○	●	○	●									
				○	○	○											○	
●						○	●				●	●					○	
●						○	●				●	●				○		
●						○	●				●	●	●		○	●	●	●
							●										●	●
							●										●	●
																	●	●

DOOR PROTECTION	
Full-height door (2-sided)	●
Half-height door	○
Foot-height door	○
Half-height decorative door	●
Bands, edges and frames	●
Handplates	○
Half-height door - Inaid signage	●

CORNER PROTECTION	
Profila	○
Decowood - Decotrend bent corner protector (for continuities)	○
Protecta 2	●
Linea'Flex	●
Profilinox	○
Combo'Corner	●
Cornea	●
Corneaflex	●
Elasto'Flex 100V	●

HANDRAILS	
Linea'Touch+ - PVC sheathed	●
Linea'Touch - PVC sheathed	●
Linea'Touch LED - PVC sheathed	○
Linea'Touch - Decowood	○
Linea'Touch LED - Decowood	○
Linea'Touch - Anodised	●
Linea'Touch LED - Anodised	○
Escort - PVC sheathed	○
Escort - Decowood	○
Escort - Anodised	●
Starline - PVC sheathed	●
Starline - Anodised	○
Performer 2	○
Escort'Duo	○
Linea'Duo	○
Linea'Duo LED	○



● SPM recommendation    ○ Another possible solution


# EDUCATION



FAHRENKROEN KINDERGARDEN - GERMANY  
Decochoc panels



Escort handrail with Rapid'Angle®

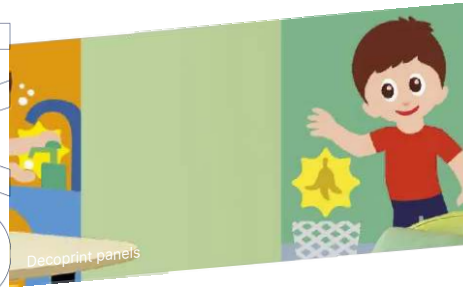

Decoprint-panels



Decochoc panels



LÉO LAGRANGE HIGH SCHOOL - BONDY - FRANCE  
Decochoc panels



Kidfresc panels



ORT GIVAT RAM SCHOOL - ISRAEL  
Decochoc panels



AMPÈRE HIGH SCHOOL - MORSANG-SUR-ORGE - FRANCE  
Decochoc panels



PIAN MÉDOC SCHOOL - FRANCE  
Decowood panels



PRIORY RUSKIN ACADEMY  
Decochoc panels



ANKORI SCHOOL - ISRAEL  
Contact plate



DOOR PROTECTION	
Full-height door (2-sided)	
Half-height door	○
Foot-height door	●
Half-height decorative door	●
Bends, edges and frames	●
Handplates	●
Half-height door - inlaid signage	●

CORNER PROTECTION	
Profilia	○
Decowood - Decotrend bent corner protector (for continuities)	○
Protecta 2	●
Linea'Flex	●
Profil'inox	●
Combo'Corner	●
Cornea	○
Corneaflex	○
Elasto'Flex 100V	○

HANDRAILS	
Linea'Touch+ - PVC sheathed	
Linea'Touch - PVC sheathed	●
Linea'touch LED - PVC sheathed	●
Linea'Touch - Decowood	
Linea'touch LED - Decowood	
Linea'Touch - Anodised	
Linea'touch LED - Anodised	●
Escort - PVC sheathed	●
Escort - Decowood	●
Escort - Anodised	
Starline - PVC sheathed	
Starline - Anodised	
Performer 2	
Escort'Duo	
Linea'Duo	
Linea'Duo LED	



● SPM recommendation      ○ Another possible solution

**OFFICES - HOTELS - RESTAURANTS  
HOUSING**



**HOTEL MERCURE COMPANS - TOULOUSE - FRANCE**  
Decoprint panels



Decoprint panel



Decowood panels




**HOTEL MERCURE COMPANS - TOULOUSE - FRANCE**  
Decotrend panels



Plac'Inox



Decotrend panels

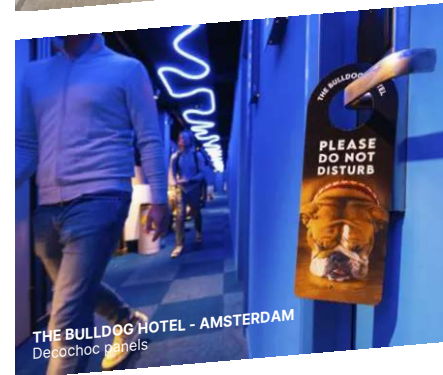

# OFFICES - HOTELS - RESTAURANTS - HOUSING

Worlds where daily life needs to be made easier and more attractive

## Your concerns


- Effective protection for walls and doors.
- Beautifully decorated.
- Renovation on a budget.
- Tile covering.
- Installation, even in an occupied environment.
- Easy to clean.

<b>BUSINESS PREMISES</b>	Office
	Meeting room, waiting room
<b>ANCILLARY AND TECHNICAL ROOMS</b>	Archives, filing rooms
	Toilet blocks
	Company restaurant, cafeteria
	Collective kitchen and annexes
	Traffic in technical areas
<b>HOTEL PREMISES</b>	Traffic in public access areas
	Traffic in technical areas
	Entrance hall, reception area
	Stairs
	Waiting room, meeting room
	Restaurant
	Room
	Toilet blocks
	Collective kitchen and annexes
	Car park
<b>Housing</b>	Entrance hall
	Traffic
	Staircases and stairwells
	Lift
	Bin room
	Bathroom and toilet blocks
	Kitchen
	Car park

WALL PROTECTION																			
Decochoq (side-by-side, silicone joint)	Decochoq (thermo-welded)	Decoclean	Decowood/Decotrend - Panels	Decofresc - Decorative frescoes	Decoprint	Decochoq Staro	Decosign - Customised signage	Contact 350	Contact 200	Linea Bedkit	Linea/Punch Neo	Impact 200	Impact 120	Impact 60	Punch/Inox	Plac/Inox	Elasto/Punch 200E	Elasto/Punch 100D	
●			●	●	●	○	●												
●					●	○	●		●										
○					○	○	●	●									○		
●			●		○	○	●		○									○	
●					○	○	●				●	●	●			○	○		
●					○	○	●	●	●	●	●	○				○	●	●	
●			●		○	○	●	●	○										
●			●		○	○	●												
●			●		○	○	●												
●			●		○	○	●												
○			○		○	○	●		●										
●			○		○	○	●				●	●	●			○	○		
●			●		○	○	●	●	●										
●			●		○	○	●	●	●										
●			●		○	○	●	●	●										
○			○		○	○	●				●	●	●						
○			○		○	○	●									●	●		
																		●	●



# SHOPS - SPORT - INDUSTRY

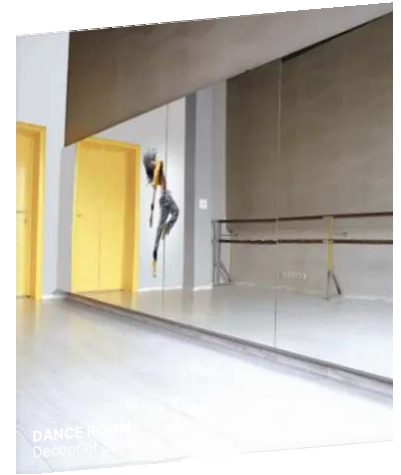



Impact wall protection rails



BASIC FIT - SPAIN  
Decochoch panels



GYMNASIUM - ISRAEL  
Decochoch panels



Decochoch panels



Decochoch panels

# SHOPS - SPORT - INDUSTRY

Worlds that rhyme with intensity and efficiency

## Your concerns

- Effective wall protection.
- Waterproofing for wet areas.
- Certified solutions for contamination control.

<b>CUSTOMER AREAS</b>	Reception counter/Cash desk
	Sales area
	Fitting room
	Corridor
	Pillars
	Stairs
<b>AREAS RESERVED FOR STAFF</b>	Changing room
	Relaxation areas
<b>ANCILLARY PREMISES</b> Shops	Toilet blocks
	Storage room
	Storage
	Unloading dock
<b>HIGH-TRAFFIC AREAS</b>	Traffic
	Stairs
<b>SPORTS AREAS</b>	Gymnasium
	Fitness and weights room
<b>RELATED AREAS</b> Sport	Cafeteria, bar
	Changing room
	Showers and toilets
<b>LIFE SCIENCES</b>	Laboratory, clean room, airlock
	Storage, laundry
<b>HIGH INDUSTRIAL TRAFFIC</b> (for non-motorised trolley area)	Traffic
	Packaging
	Production
	Storage
<b>HIGH INDUSTRIAL TRAFFIC</b> (for motorised trolley area)	Traffic/Storage/Docks

WALL PROTECTION																		
Decochoc (side-by-side, silicone joint)	Decochoc (thermo-welded)	Decoclean	Decowood/Decotrend - Panels	Decofresc - Decorative frescoes	Decoprint	Decochoc Staro	Decosign - Customised signage	Contact 350	Contact 200	Linea Becklit	Linea Punch Neo	Impact 200	Impact 120	Impact 60	PunchInox	PiacInox	ElastoPunch 200E	ElastoPunch 100D
●			●	●	●	○	●	○	○		○	○	○	○	○	○		
●			○	○	○	○	●									●		
●			●	●	●	○	●	○	○		○	○	○	○	○	○	○	○
●			●		●	○	●	○	○		○	○	○	○	○	○	○	○
●			●		●	○	●		○							○	○	○
●			●	○	●	○	●	○	○									
●		●	○	○	○	○	○	○	○							○		
●			○		○	○	●	●	●							●	○	○
●					○	○	●	○	○		●	●	●	●		●	●	●
●																●	●	●
●			●		○	○	●	●	●									
●					○	○	●											
●	○		●	●	○	○	●									○		
○	●					○	●		●									
●	●	●				○	○	●										
●							○	●	○	○		●	●			○		
●	●						○	●	●	●		●	●	○		●	●	●
●	●						○	●								●		
●	○						○	●	●	●		●	●	○		●	●	●
																	●	●




# PALETTE OF 50 COLOURS

A palette of 50 colours designed in collaboration with architects, interior designers, colourists and end-users.


## SOLID COLOURS: Do as you please!

The 39 matt and solid colours, from the most sober to the most daring, blend in with the designer's initial concept or, conversely, play with colours and contrasts to give a new identity to spaces.

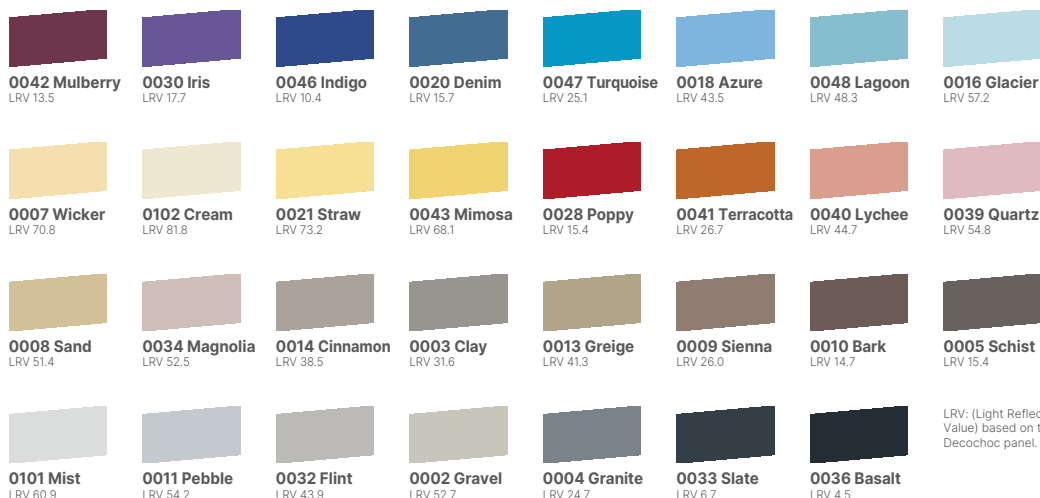


## WOOD: Create a cosy atmosphere!

The 7 wood decors can be used for both wall protection and handrails, offering users and staff a welcoming atmosphere thanks to the warmth of wood.

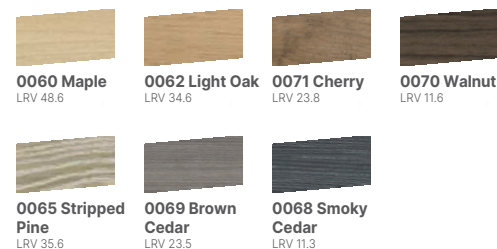

## TRENDS: Break the codes!

The 4 trendy decors have a modern, urban feel thanks to surprising material effects: brushed aluminium, raw concrete and oxidised steel.



LRV: (Light Reflectance Value) based on the Decochoc panel.

## PLUS POINT

In order to offer the best possible contrasts required in certain environments, SPM colours are DSDC (Dementia Services Design Center) certified - see table on page 110 - and comply with the Accessibility standard.



# AT THE SERVICE OF OUR CUSTOMERS

SPM is much more than just wall protection.

A team fully dedicated to your projects, a nationwide network for optimum proximity, and solutions to almost all of your problems!



## At the service of our customers

95% of our references are available in under 15 days (excludes international transport and special projects. Consult us)



## Free quotes

Looking for a price quote? Looking for a technical solution tailored to your project? Need help with a call for tenders? You'll receive a timely response from our team.



## Local contacts


Our Export sales team is always close to you and your projects, providing assistance with measurements, on-site advice, dialogue with the various parties involved in the project, etc.



## Technical recommendations

Because wall protection needs differ from one project to the next, SPM systems can be adapted to meet all your requirements.

### 1 - Protect the entire impact area

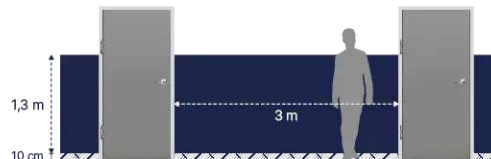

## CONTACT US FOR MORE INFORMATION!




For the rest, our teams will do their utmost to find the solution best suited to your needs!



### Quick installation

Protect your walls in no time at all with our standard sized panels:  
L. 3 m x H. 1.30 m

### 2 - Choose your protection height

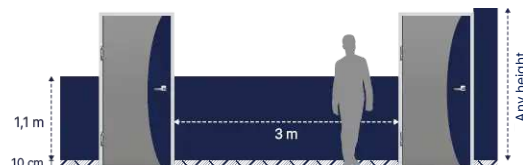

Opt for made-to-measure panels and only pay for what you actually need.



### Custom-made for peace of mind

0 offcuts and optimum protection for walls and doors.

### 3 - Protect, optimise & support



Manage and reuse your offcuts by cutting standard panels at mid-height. 80% of the wall's surface is protected against impacts and tearing.



### Accessibility

Add a handrail to ensure 100% protection of the area of the wall exposed to impacts and to ensure user safety and guidance.

## PRODUCT PAGES: GUIDE

To respond to all your projects and issues, we've created simple, visual product pages that summarise all the information you need.

32



Type of use

Product range and name

Product presentation

Establishments and areas of application

### Technical SPECIFICATIONS

At a glance, you can access all the product characteristics in the form of a summary table: dimensions, certificates, environmental data, etc.

How to install the SPM product

### Colour offering

See the range of colours available for each product at a glance.

- On the left: Standard colours, in stock.
- Right: colours available to order (minimum quantity and lead time), please contact us.

WALL PROTECTION

WALL PROTECTION RAILS

## LINEA'PUNCH NEO

REACH

FORMULATION THAT IS CLEAN

BS200

The Linea'Punch Neo wall protection rail is the ideal combination of impact resistance and design. Designed to blend in with the décor, it is the perfect match for Linea'Touch handrails. Its narrow, bevelled end pieces minimise the space required and the distance to door frames. It guarantees easy cleaning and optimum hygiene. Quick and easy to fit, its double clipping system ensures perfect application. Very strong wall protection.

**ESTABLISHMENTS AND AREAS OF APPLICATION**

HOSPITALS   CLINICS   LABORATORIES   WHITE ROOMS

56   RETIREMENT HOMES   BACK AREAS (HOTEL, RESTAURANT)

<b>Height(s)</b>	180 mm
<b>Length(s)</b>	4 m Customisation
<b>Overall dimensions</b>	25 mm
<b>Material(s)</b>	PVC
<b>Hygiene</b>	Antibacterial
<b>Fire</b>	M1/Bs2d0
<b>Colours</b>	39 Through coloured
<b>Surface appearance</b>	Matt with central boss

**Mounting**  
On aluminium clip.  
Option: On continuous aluminium rail.

**Installation mode**  
The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

**Standard colours**



### Certifications, resistance and properties

Discover the benefits of each product, illustrated by pictograms.

### Is there any missing information?

Scan the QR codes to access the dedicated web page: documents, descriptions, product components, etc.

### Technical cross-section

Get a clear view of the dimensions, overall dimensions, strengths and special features of each product, including fixing systems.

### Exploded view

See all the product components and available options.

## ANY QUESTIONS OR NEED ADVICE?

ASSISTANCE > + 33 (0) 5 34 39 41 00

export@spm.fr

## CODIFYING PROTECTION NEEDS

### A PICTOGRAM FOR EACH USE

Within the same establishment, the "protection" response depends on the impact zones, the intensity of the traffic and the rolling equipment.

We have established a classification of uses and assigned them two pictograms, each with three levels of intensity, to guide you through our documentation.

**Intensity of passenger traffic:**  
very busy or low-traffic reception area

	Heavy traffic
	Moderate traffic
	Light traffic


**Impact intensity:**  
trolleys, rolling equipment, suitcases, etc.

	Regular and strong shocks
	Shocks and impacts at normal speed
	Rare and low-intensity shocks

## PRACTICAL INTERNET & BIMOBJECT

All our technical information (type descriptions, cross-sections and installation advice) is available & can be downloaded from our website: [spm-international.com](http://spm-international.com)

Most of our products are available on BIMObject.



## INSTALLATION ADVICE

To help you install our products, the installation guide is available on request or on our Youtube channel.

**VIDEO**  
Installing the panels

**WATCH VIDEO**

**VIDEO**  
Installing handrails

**WATCH VIDEO**





LINEA PUNCH NEO

## WALL PROTECTION

All Establishments open to the public face the same problems: premature wear and tear on their premises.

To provide you with the appropriate solution, SPM has developed and tested solutions based on three product families:

- protection and covering panels,
- protection plates,
- wall protection rails.

All are resistant to impact, germs and aggressive cleaning agents.



CONTACT



KIDFRESC



DECOWOOD

Because our products designed with through-coloured antibacterial PVC, neither maintenance nor the passage of time will alter the original colour.



IMPACT

### GOOD TO KNOW!

SAFE'COVER: system for asbestos-contaminated areas (page 47).

Problem regarding wet rooms? SPM has the solution (page 46).



## CONTENTS



DECOCHOC	36	AAA	BB
DECOCLEAN	37	A	BB
DECOWOOD	38	AAA	BB
DECOTREND	39	AAA	BB
DECOCHOC STARO	40	AAA	BB
DECOFRESC	41	AAA	BB




KIDFRESC	42	AA	BB
DECOPRINT	43	AA	BB



DECOSIGN	44
----------	----



WET ROOMS	46
SAFE COVER	47
DECOBOWL	47



TOOLS & FIXINGS 68

Find all our tools and fixing systems for panels and doors

DISCOVER



FIN'ALU	48
FIN'COLOR	49
FIN'STOP	50
FIN'CERAM	51
FIN'ANGLE	52
FIN'LINE	53



CONTACT	54	AA	BB
---------	----	----	----



LINEA'BEDKIT	55	A	BB
--------------	----	---	----



LINEA'PUNCH NEO	56	AAA	BB
IMPACT	57	AAA	BB
PUNCH'INOX	58	A	BB
PLAC'INOX	58	AA	BB
ELASTO'PUNCH 200E	59	A	BB
ELASTO'PUNCH 100D	59	A	BB

AAA Traffic intensity  
BB Resistance to impacts

PROTECTION AND COVERING PANEL

## DECOCHOC



SPECIFICATIONS

BIM OBJECT

The SPM bestseller!  
DECOCHOC panels provide effective protection for large surfaces.  
Its matt grained finish is discreet, resistant to chemicals and easy to clean.

It can be thermoformed to fit round pillars (up to Ø 800 mm) and guarantees optimum hygiene in corners.



HOSPITALS | CLINICS | RETIREMENT HOMES | HOTELS

SCHOOLS | EARLY CHILDHOOD | RESTAURANTS

MULTI-FAMILY HOUSING | GYMNASIUMS AND SPORTS HALLS

DISABILITY CENTRES | SHOPS



Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	39 Through-coloured
Surface appearance	Lightly textured with matt finish ("HydrX" finish)

## Fixing



With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

## Installation mode

Bonding in accordance with SPECIFICATIONS (substrate, adhesive and application context allowing Bs2d0 level).

## Customised option(s)

Cutting, L or U folding, thermoforming, chamfering, bactericidal treatment.

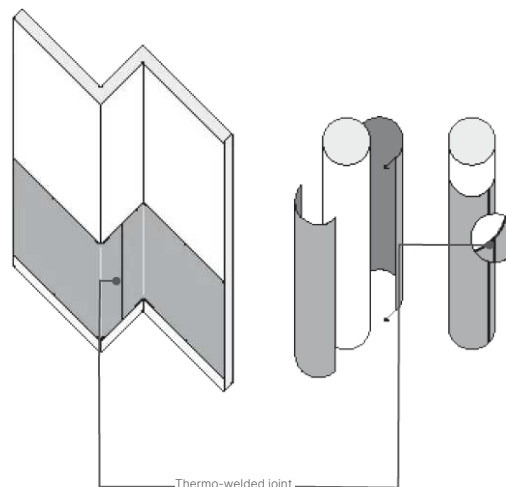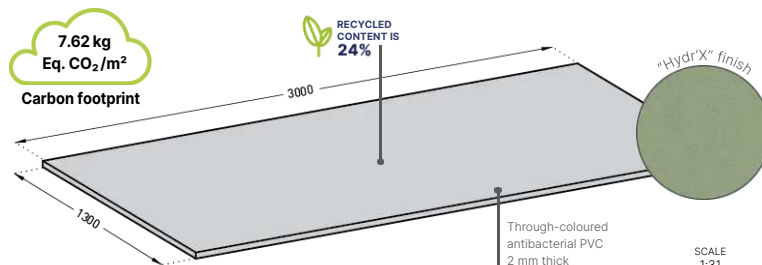

## VIDEO

DECOCHOC  
Panel installation:

WATCH VIDEO

## NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range (e.g. page 69).

Standard colours



E-brochures. By segment.  
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

\*See page 8: Benefits

# PROTECTION AND COVERING PANEL DECOCLEAN



ISO 5



SPECIFICATIONS

[BIM OBJECT](#)

The DECOCLEAN panel protects high-risk infection areas, including level 4 zones, white rooms and industrial areas.


It limits nosocomial illnesses and bacterial proliferation.

It can be thermoformed to fit round pillars ( $\varnothing > 800$  mm) and ensures perfect hygiene in corners.


[OPERATING THEATRES](#) [TRANSPLANT ROOMS](#) [WHITE ROOMS](#)
[BURNS UNITS](#) [NEONATAL WARDS](#) [STERILE AREAS](#)
[FOOD INDUSTRY](#) [PRODUCTION AREAS](#)

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal* ISO Class 5*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Average service life	25 years
Colours	5 Through-coloured
Surface appearance	Smooth

Standard colours


 E-brochures. By segment.  
Click to discover.


HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

7.62 kg  
Eq. CO<sub>2</sub>/m<sup>2</sup>  
Carbon footprint

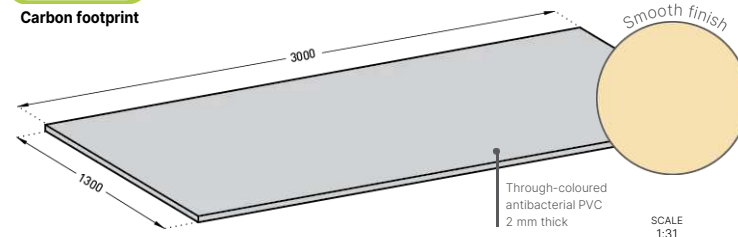

**Fixing**


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

**Installation mode**

By gluing as per SPM SPECIFICATIONS.

**Customised option(s)**

Cutting, L or U folding, thermoforming, chamfering, bactericidal treatment.

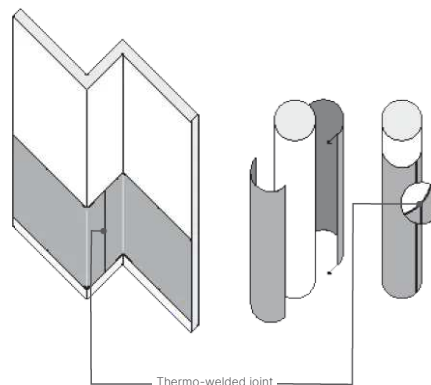

## VIDEO

 DECOCLEAN  
Panel installation:

[WATCH VIDEO](#)

## NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

\*See page 8: Benefits

# PROTECTION AND COVERING PANEL

## DECOWOOD



SPECIFICATIONS

[BIM OBJECT](#)

DECOWOOD decorative protection and cladding panels are particularly suitable for protecting against impacts, scratches and rubbing in establishments that want to combine the protection and warmth of wood decor.

A textured finish and an ultra-realistic feel.

It can be thermoformed to cover round pillars (diameter up to 800 mm) and ensure perfect hygiene in corners.



HEALTHCARE FACILITIES RETIREMENT HOMES HOTELS  
SCHOOLS MULTI-FAMILY HOUSING  
SHOPS GYMNASIUMS AND SPORTS HALLS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	7
Surface appearance	Textured wood decor finish

### Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

### Installation mode

By gluing as per SPECIFICATIONS.



### Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

### THAT LITTLE EXTRA

A matching corner protection is also available in the DECOWOOD finish, as from folding panels, for perfect harmony with the wall's panels. Contact us.

Standard colours

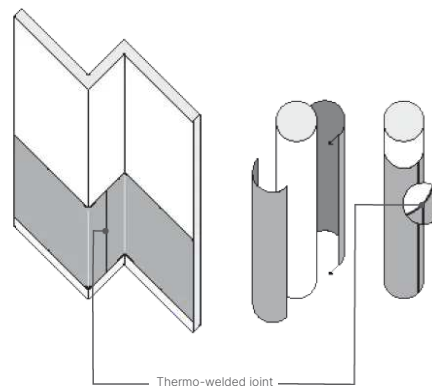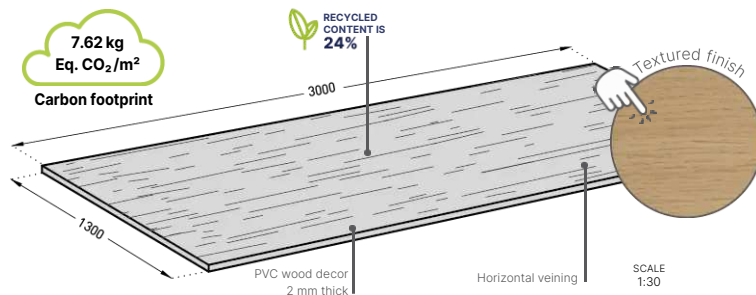

### VIDEO

DECOWOOD panel installation

[WATCH VIDEO](#)

### NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# PROTECTION AND COVERING PANEL

## DECOTREND




SPECIFICATIONS

[BIM OBJECT](#)

The DECOTREND decorative protection and covering panel enhances and accentuates interiors in an original way and reflects a modern, urban design.

The panels can be thermoformed to cover round pillars (diameter up to 800 mm) and ensure perfect hygiene in corners.



HOTELS RETIREMENT HOMES MULTI-FAMILY HOUSING  
SCHOOLS SHOPS GYMNASIUMS AND SPORTS HALLS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	4
Surface appearance	Metal or concrete decor finish, textured

### Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

### Installation mode



By gluing as SPM SPECIFICATIONS.

### Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

### THAT LITTLE EXTRA

A matching corner protection is also available in the DECOTREND finish, as from folding panels, for perfect harmony with the wall's panels. Contact us.

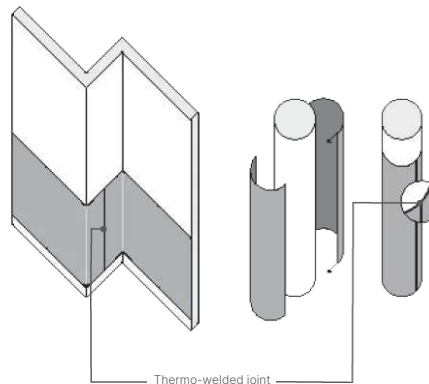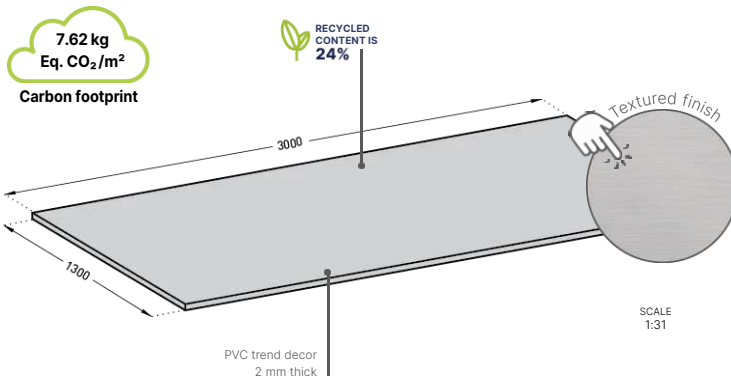

### VIDEO

DECOTREND panel installation

[WATCH VIDEO](#)

### NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

Standard colours



E-brochures. By segment.  
Click to discover.

[HEALTHCARE](#)

[EDUCATION](#)

[HOSPITALITY](#)

[RETAIL](#)



**SPM**  
wall protection

# PROTECTION AND COVERING PANEL


## DECOCHOC STARO



DECOCHOCStaro PVC-free wall protection and covering panel provides effective protection for large surfaces.

Its subtly textured finish is discreet, highly resistant to impact and scratches and exceptionally easy to clean. It can be thermoformed to fit round pillars (up to Ø 800 mm) and guarantees optimum hygiene in corners.

Designed to meet the most stringent fire and hygiene standards in public buildings, the DECOCHOCStaro system is the ideal solution for healthy interiors built to last—without the need for frequent renovations.

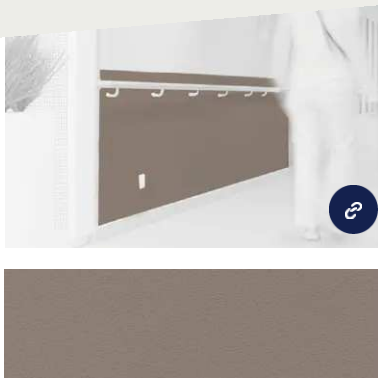

HOSPITALS CLINICS RETIREMENT HOMES  
SCHOOLS HOTELS SHOPS

<b>Height(s)</b>	1.25 m
<b>Length(s)</b>	3 m
<b>Thickness</b>	1.5 mm
<b>Material(s)</b>	PETg Starolène
<b>Fire rating</b>	Bs1d0
<b>Carbon footprint</b>	9.58 kg* eq. CO <sub>2</sub> /m <sup>2</sup>
<b>Average service life</b>	25 years
<b>Colours</b>	11 Through-coloured
<b>Surface appearance</b>	Lightly textured with matt finish ("HydrX" finish)

Standard colours




\*According to a product life cycle assessment - landfill scenario.

\*\*Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.



SPECIFICATIONS

BIM OBJECT

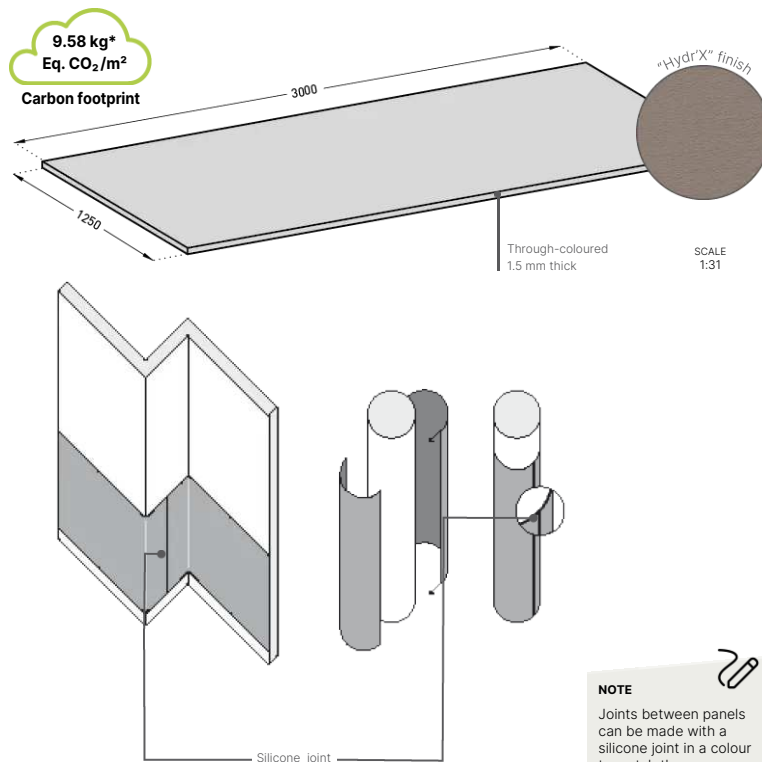

# PROTECTION AND COVERING FRESCO DECOFRESC



SPECIFICATIONS

BIM OBJECT

DECOFRESC adds a touch of elegance and customisation. It provides a welcoming environment for establishments open to the public, while meeting hygiene and impact resistance requirements.



Wave

Cloud

HEALTHCARE FACILITIES HOTELS RESTAURANTS

SCHOOLS EARLY CHILDHOOD

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	39 Through-coloured
Surface appearance	Lightly textured with matt finish ("HydrX" finish)

### Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

### Installation mode

By SPM gluing as per SPECIFICATIONS.

### NOTE

Joints between panels can be made with a thermo-welded joint or with a silicone joint in a colour to match the range.

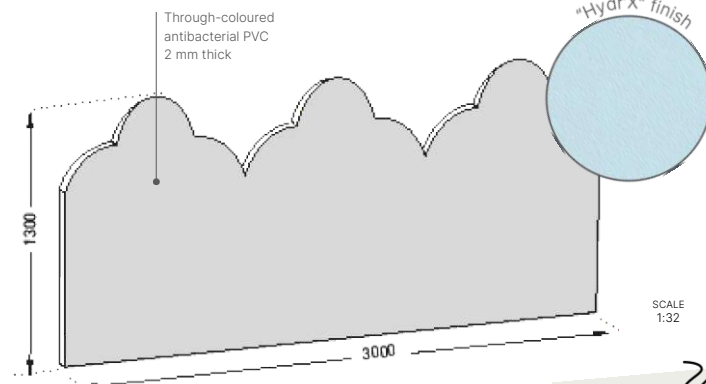

### NOTE

These frescoes are made from cut DECOCHOC panels.

Standard colours



E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



\*See page 8: Benefits

DIGITAL PRINT PANELS  
**KIDFRESC**

SPECIFICATIONS

BIM OBJECT

KIDFRESC's decorative frescoes for young children are specially designed to brighten up and protect walls. They create a cheerful, welcoming environment that stimulates children's imagination.

They meet the hygiene and impact resistance requirements of early childhood.



MATERNITY EARLY CHILDHOOD SCHOOLS  
HEALTHCARE FACILITIES



9.58 kg\*  
Eq. CO<sub>2</sub>/m<sup>2</sup>

Carbon footprint



Savannah theme



Maritime theme



Altitude theme

Height(s)	1.20 m
Length(s)	2.90 m
Thickness	1 mm
Material(s)	PETg
Fire rating	Bs1d0
Contact with food	Yes
Carbon footprint	9.58 kg* eq. CO <sub>2</sub> /m <sup>2</sup>
Colours	3 themes with 4 pictures (digital printing)
Surface appearance	Smooth matt

★ **Fixing**


With SPM acrylic adhesive\*\* or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

➤ **Installation mode**

By SPM gluing as per SPECIFICATIONS.

**NOTE**

Joints between panels can be installed edge-to-edge or sealed with a transparent silicone joint.

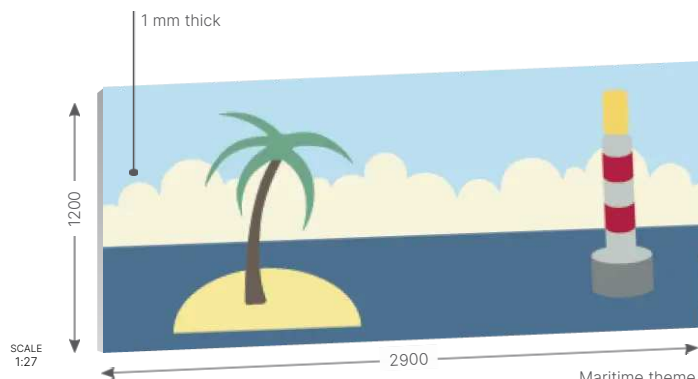

\*According to a product life cycle assessment - landfill scenario.  
\*\*Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.

E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



DIGITAL PRINT PANELS  
**DECOPRINT**

Unleash the creativity of your walls and combine wall protection with personalised decoration!

DECOPRINT brings a touch of originality to establishments looking for an aesthetic solution to protect, cover walls and/or provide information.

Custom HD digital printing on the reverse of the panel to resist scratches and rubbing.

HEALTHCARE FACILITIES HOTELS RESTAURANTS

SCHOOLS EARLY CHILDHOOD SHOPS

MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

**9.58 kg\***  
**Eq. CO<sub>2</sub>/m<sup>2</sup>****Carbon footprint**


<b>Height(s)</b>	1.20 m max.
<b>Length(s)</b>	2.90 m max.
<b>Thickness</b>	1 mm
<b>Material(s)</b>	PETg
<b>Fire rating</b>	Bs1d0
<b>Contact with food</b>	Yes
<b>Carbon footprint</b>	9.58 kg* eq. CO <sub>2</sub> /m <sup>2</sup>
<b>Colours</b>	Translucent for customisation
<b>Surface appearance</b>	Smooth matt

**★ Fixing**

With SPM acrylic adhesive\*\* or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

**7 Installation mode**

By gluing as per SPM SPECIFICATIONS.

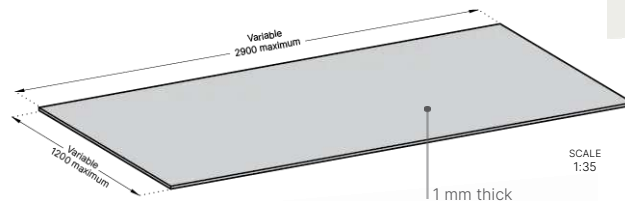SCALE  
1:35**NOTE**

Joints between panels can be installed edge-to-edge or sealed with a transparent silicone joint.

\*According to a product life cycle assessment - landfill scenario.

\*\*Bs1d0 fire rating achieved with SPM MS Polymer adhesive. Certificate available on request. Please contact us.

E-brochures. By segment.  
Click to discover.

**HEALTHCARE****EDUCATION****HOSPITALITY****RETAIL****SPECIFICATIONS****BIM OBJECT****PRELIMINARY DRAFT**

- Site survey and indication of dimensions
- Expertise dedicated to the project
- Advice on

**PHOTOS & RIGHTS\***

Online image banks are available: Adobe Stock, Getty, Unsplash, Shutterstock, etc.



SIGNAGE  
**DECOSIGN**

NEW

MADE IN  
FRANCE

SPECIFICATIONS

BIM OBJECT

A solution in perfect harmony with your wall protection.  
Inform, guide and promote key areas of your business with a wide choice of pictograms, lettering and numbers.

4 techniques available: cut-out, hollowed-out, inlaid, printed.

Made to order on resistant plates, adhesive or non-adhesive, in square, round or ovoid shapes, or integrated directly into wall and door protections.



HEALTHCARE FACILITIES RETIREMENT HOMES SHOPS SCHOOLS EARLY CHILDHOOD  
HOTELS RESTAURANTS MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS

<b>Height(s)</b>	Customisation
<b>Length(s)</b>	Customisation
<b>Thickness</b>	2 mm 1 mm
<b>Material(s)</b>	PVC PETg Option: adhesive
<b>Fire rating</b>	Bs2d0
<b>Contact with food</b>	Yes
<b>Colours</b>	50 Customised printing
<b>Surface appearance</b>	Lightly textured with matt finish ("HydrX" finish) Textured finish : wood, metal, concrete or Corten decor effect Smooth matt (printed version)

**Fixing**

Pre-adhesive or with SPM acrylic adhesive.

**Installation mode**

Pre-adhesive or adhesive signage as per SPM SPECIFICATIONS.

Standard colours



E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



## MEN, WOMEN &amp; PRM



Couple 2



H&amp;F



Mars



Vénus



Soulier



Escarpin



Trio 2



Petit-fils



Handy

## LETTERS, NUMBERS &amp; ARROWS

ROOMS  
ACCUEIL

Play



Arrows



Numbers

## DIGITAL



Ordinateur



Prise



Wifi



USB C

## HOTEL &amp; RESTAURANT



Serveur



Change



Valise



Pique-nique



Transat



Cocktail



Restaurant



Café



Ascenseur



Escalier



Sortie

## EVERYDAY LIFE



Pharmacie



Pilule



Poubelle



Poussette



Laverie



SPA



Recyclage

## MOBILITY



Vélo



Trotelec'



Haltère



Musculation



Douche



Cintre

Vestiaire  
HommeVestiaire  
Femme

## EARLY CHILDHOOD

Doe  
(e.g. Sienna)Beaver  
(e.g. Sienna)Bear  
(e.g. Bark)Rabbit  
(e.g. Clay)Fish  
(e.g. Poppy)Lioness  
(e.g. Sand)Elephant  
(e.g. Granite)Giraffe  
(e.g. Mimosa)Monkey  
(e.g. Bark/  
Sienna)Hippo  
(e.g. Pebble)Hippo  
(e.g. Pebble)

SIGNAGE  
DECOSIGN**GOOD TO KNOW!**

Pictograms of your choice and fully customised are possible, subject to compliance with dimensional constraints and prior agreement from the SPM Technical department.

**Consult us**



## FOR WET ROOMS



DECOCHOC, DECOWOOD and DECOTREND panels: the ideal solution for protecting walls and doors in wet environments.

At just 2 mm thick, they cover tiled surfaces and eliminate joint problems.

Combined with our patented SPM MS Polymer adhesive and our finishes, they guarantee a long-lasting watertight joint.

Compliant with French technical standard ATEC no.12/19 - 1782 V2. Can be installed on an occupied site.



MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS  
SHOPS

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO2/m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Lightly textured with matt finish ("HydrX" finish) Textured finish: wood, metal, concrete or Corten decor effect

Standard colours (panels)



### Fixing

With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

### Installation mode


By gluing as per SPECIFICATIONS.

### Customised option(s)

Cutting, L or U option, thermoforming, chamfering.

### Heat-sealing

Heat-sealing between panels



Heat-sealing between panels and flexible floor skirting rise





### Bending

L-shaped bend



U-shaped bend

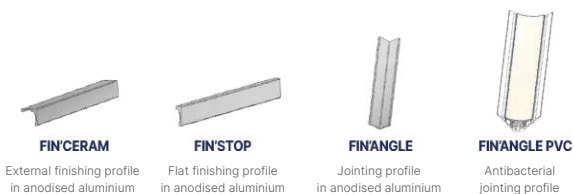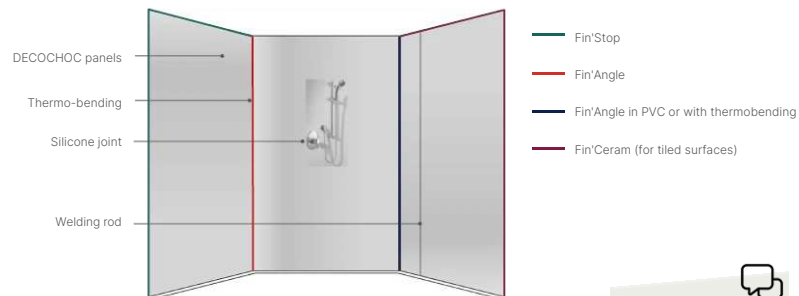

### GOOD TO KNOW!

Some substrates require specific advice for installation and gluing. Consult us.

# PANEL SYSTEMS SAFE'COVER




The treatment of asbestos in public and private buildings has become a major public health issue in recent years.

The SAFE'COVER system offers a comprehensive, economical, innovative and unique solution. It allows you to operate in subsection 4 and in an occupied environment with a visitable or non-visitable covering process.

Dust level measurements during work comply with the French Public Health Code and the French Labour Code.

MULTI-FAMILY HOUSING GYMNASIUMS AND SPORTS HALLS  
SHOPS

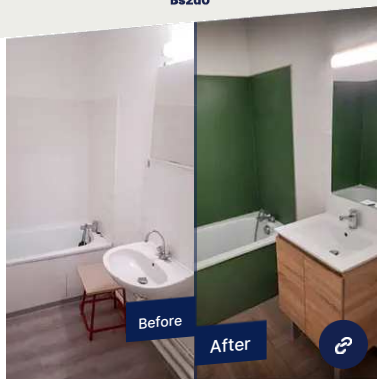

Height(s)	1.30 m
Length(s)	3 m
Thickness	2 mm
Material(s)	PVC
Fire rating	Bs2d0
Carbon footprint	7.62 kg eq. CO2/m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Lightly textured with matt finish ("HydrX" finish) Textured finish: wood, metal, concrete or Corten decor effect

### Fixing

With the Fix & Move system.  
With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

### Installation mode

By gluing or Fix & Move as per SPM SPECIFICATIONS.

### Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

Standard colours (panels)



E-brochures. By segment.  
Click to discover.



## SPECIFICATIONS

## DECOBOWL

Designed using SPM panels, the DECOBOWL solution is installed behind wall-hung WCs to effectively protect the wall.

It prevents the risk of damage such as blistering, peeling paint or damage to plasterboard, often caused by clamping the toilet to a flexible wall covering. DECOBOWL thus offers long-lasting, reliable protection for exposed walls.


## SPECIFICATIONS

### BIM OBJECT



### Installation mode

Bonding in accordance with SPM SPECIFICATIONS (substrate, adhesive and application context allowing Bs2d0 level).

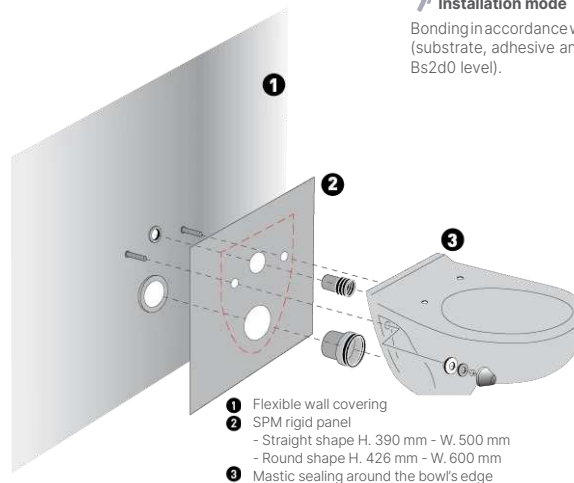

### NOTE

Made-to-measure DECOBOWL formats can be produced to guarantee the necessary 10 cm around the various existing sanitary facilities. Consult us.

## FINISHING AND JOINTING PROFILES

## FIN'ALU

FIN'ALU profiles emphasise the panel jointing and add a top-of-the-range touch to the wall protection.

They provide a perfect finish above and between DECOCHOC, DECOWOOD or DECOTREND protection and covering panels.



HOSPITALS CLINICS RETIREMENT HOMES SHOPS  
MULTI-FAMILY HOUSING OFFICES


<b>Apparent height(s)</b>	H-profile: 21 mm J-profile: 18 mm
<b>Length(s)</b>	3 m
<b>Material(s)</b>	Aluminium PVC (base)
<b>Colours</b>	Satin silver anodised
<b>Surface appearance</b>	Smooth

#### Fixing

Use SPM acrylic adhesive for the H-shaped and J-shaped jointing profiles or screw mounted version of the J-shaped finishing profile.

#### Installation mode

By gluing or screw-mounted as per SPM SPECIFICATIONS.

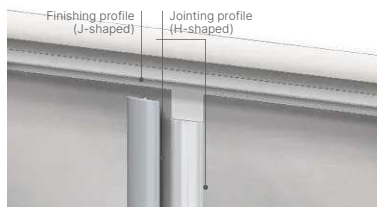

Standard colours 


Satin anodised



SPECIFICATIONS


BIM OBJECT

#### JOINTING PROFILE (H-SHAPED)

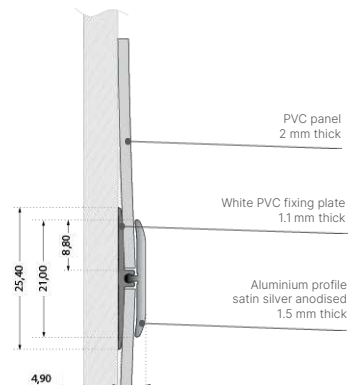

SCALE  
1:1

#### FINISHING PROFILE (J-SHAPED)

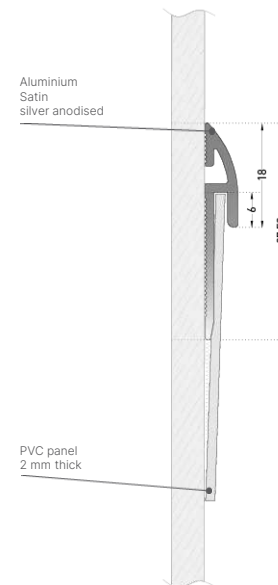

SCALE  
1:1

E-brochures. By segment.  
Click to discover.



FINISHING AND JOINTING PROFILES

## FIN'COLOR

FIN'COLOR finishing and jointing profiles add a discreet decorative touch for a harmonious whole.

They provide an aesthetic finish and a perfect joint between panels or between panels and flexible floor skirting rise.



HOSPITALS CLINICS RETIREMENT HOMES SHOPS  
MULTI-FAMILY HOUSING SCHOOLS


<b>Apparent height(s)</b>	H-profile: 21.57 mm J-profile: 20.5 mm
<b>Length(s)</b>	3 m
<b>Material(s)</b>	PVC
<b>Hygiene</b>	99.9% antibacterial
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	39 Through-coloured
<b>Surface appearance</b>	Smooth

### Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive sealant (no tacking time, ideal for wet rooms, patent pending).

### Installation mode

By gluing as per SPM SPECIFICATIONS.

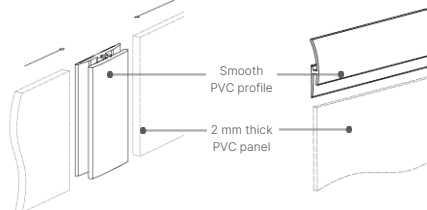


### JOINTING PROFILE (H-SHAPED)

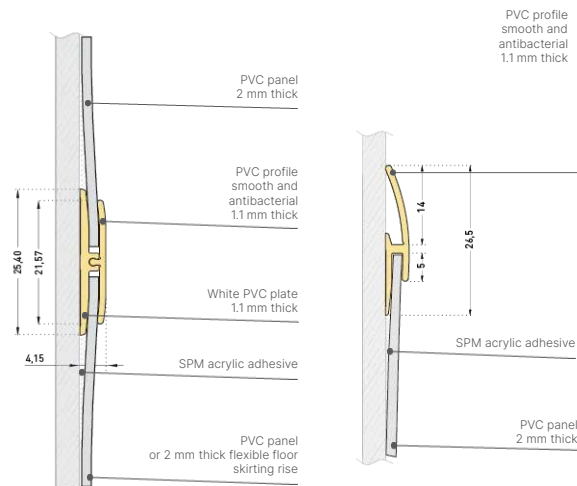

SCALE  
1:1

### FINISHING PROFILE (J-SHAPED)



SCALE  
1:1

Standard colours +



E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY




RETAIL



## FIN'STOP

For finishing protective panels over tiles:

- Provides a perfect horizontal or vertical finish, particularly for shower and bath panels;
- Ideal for renovating damp rooms;
- Simple adhesive fixing.



## MULTI-FAMILY HOUSING

 <b>Apparent height(s)</b>	12 mm
 <b>Length(s)</b>	3 m
 <b>Apparent width(s)</b>	4 mm
 <b>Material(s)</b>	Aluminium
 <b>Colours</b>	Satin silver anodised
 <b>Surface appearance</b>	Smooth

#### Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and SPM MS Polymer adhesive sealant.

#### Installation mode

By gluing as per SPM SPECIFICATIONS.


Standard colours 

Satin anodised



SPECIFICATIONS

BIM OBJECT




Satin silver anodised aluminium

Mastic

SPM MS Polymer adhesive

2 mm thick PVC panel



SCALE  
1:2

E-brochures. By segment.  
Click to discover.

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL




FINISHING AND JOINTING PROFILES

## FIN'CERAM

The FIN'CERAM profile provides an elegant, discreet finish for protective panels installed on tiled surfaces.

It integrates perfectly both horizontally and vertically, particularly around showers and baths, making it an ideal solution for renovating wet rooms. By neatly masking the edges of the tiles, it guarantees a neat finish. It's quick and easy to install with an adhesive fixing system.



## MULTI-FAMILY HOUSING

<b>Apparent height(s)</b>	12 mm
<b>Length(s)</b>	3 m
<b>Apparent width(s)</b>	8 mm 12 mm
<b>Material(s)</b>	Aluminium
<b>Colours</b>	Satin silver anodised
<b>Surface appearance</b>	Smooth

#### Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and SPM MS Polymer adhesive sealant.

#### Installation mode

By gluing as per SPM [SPECIFICATIONS](#).




Standard colours

Satin anodised



SPECIFICATIONS

BIM OBJECT

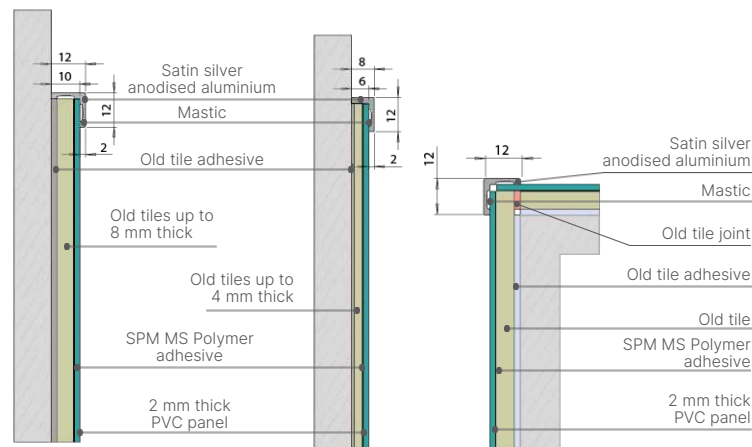

E-brochures. By segment.  
Click to discover.



## FINISHING AND JOINTING PROFILES

## FIN'ANGLE

FIN'ANGLE PVC and FIN'ANGLE ALU jointing profiles are designed for finishing internal corners, particularly in wet rooms and showers.

Quick and easy to install, they are glued (FIN'ANGLE ALU) or clipped (FIN'ANGLE PVC) onto a base previously glued to the wall.

FIN'ANGLE profiles fit perfectly with DECOCHOC panels and guarantee optimum watertightness.



## HEALTHCARE FACILITIES MULTI-FAMILY HOUSING

<b>Length(s)</b>	3 m
<b>Overall dimensions</b>	2 mm
<b>Material(s)</b>	PVC Aluminium
<b>Hygiene</b>	99.9% antibacterial (Fin'Angle PVC)
<b>Colours</b>	Through-coloured Satin silver anodised
<b>Surface appearance</b>	Smooth appearance

#### Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending) and MS Polymer sealant or Hybrid'Fix.


#### Installation mode

Bonding in accordance with SPM adhesive and application context).

SPECIFICATIONS (substrate,

FIN'ANGLE PVC standard colours


FIN'ANGLE Alu standard colours



FIN'ANGLE PVC  
IN A DRY ENVIRONMENT

FIN'ANGLE PVC  
IN A WET ENVIRONMENT

FIN'ANGLE ALU

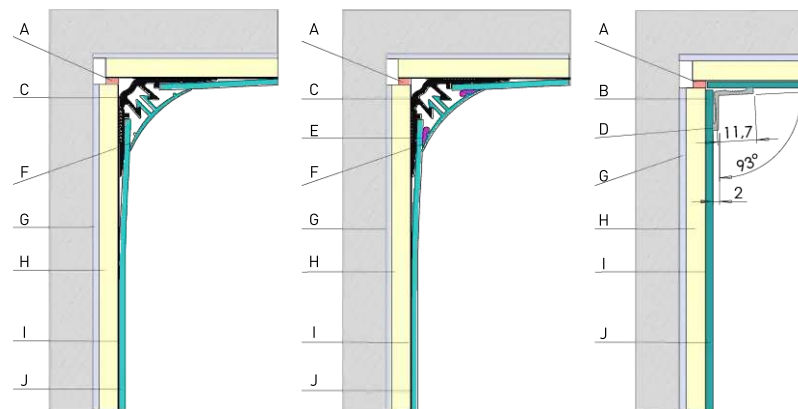

- A. Old tile joint
- B. Satin silver anodised aluminium
- C. FIN'ANGLE PVC base
- D. Mastic
- E. Hybrid'Fix mastic
- F. FIN'ANGLE PVC cover
- G. Old tile adhesive
- H. Old tile
- I. SPM MS Polymer adhesive
- J. 2 mm thick PVC panel

SCALE  
1:1.35



SPECIFICATIONS

BIM OBJECT



## FINISHING AND JOINTING PROFILES

## FIN'LINE







The FIN'LINE ultra-slim finishing profile is a decorative element designed to elegantly accentuate the top of wall protection panels.

It provides a neat finish, whether laid horizontally or vertically, and blends in perfectly with public areas.

Available in contrast or tone-on-tone with the panel, it allows you to customise the appearance while ensuring harmonious visual continuity.



HOTELS RESTAURANTS RETIREMENT HOMES OFFICES

 <b>Apparent height(s)</b>	3.3 mm
 <b>Length(s)</b>	3 m
 <b>Apparent width(s)</b>	5 mm
 <b>Material(s)</b>	Aluminium
 <b>Colours</b>	3
 <b>Surface appearance</b>	Smooth

#### ◆ Fixing

With acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patented solution), or screw-mounted.

#### ➤ Installation mode

By gluing or screw-mounted as per SPM specifications (substrate, adhesive and application context allowing Bs2d0 level).



SPECIFICATIONS

 BIM OBJECT



Powder-coated aluminium

With SPM acrylic adhesive or SPM MS Polymer adhesive

PVC panels  
2 mm thick

SCALE  
1:1.35Standard colours 

Golden brass  
Rose copper  
Matt black

E-brochures. By segment.  
Click to discover.

 HEALTHCARE

 EDUCATION

 HOSPITALITY

 RETAIL


# PROTECTION PLATES CONTACT




SPECIFICATIONS

BIM OBJECT

CONTACT's self-adhesive protection plate is both resistant and decorative.

It ensures perfect protection for walls exposed to scratches and rubbing from furniture, chairs, etc.



Contact 350



Contact 200

HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES WAITING ROOMS  
OFFICES



<b>Height(s)</b>	350 mm 200 mm
<b>Length(s)</b>	4 m
<b>Thickness</b>	2.5 mm
<b>Material(s)</b>	PVC Foam adhesive
<b>Hygiene</b>	99.9% antibacterial
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	39 Through-coloured
<b>Surface appearance</b>	Smooth with a few decorative grooves

### ✦ Fixing

Sheet with foam adhesive to be reinforced with SPM universal adhesive sealant.

### ➤ Installation mode

By adhesive bonding.

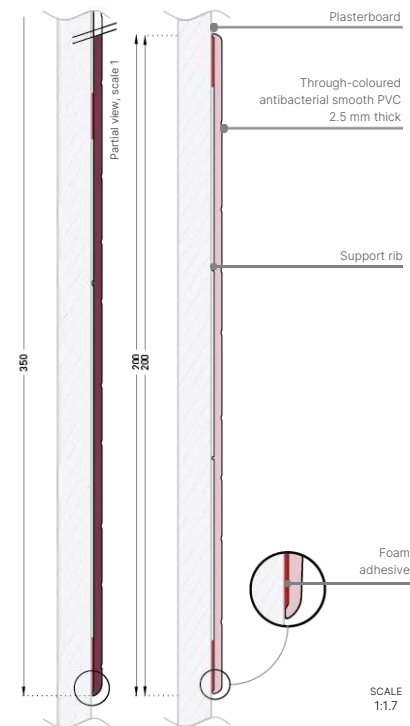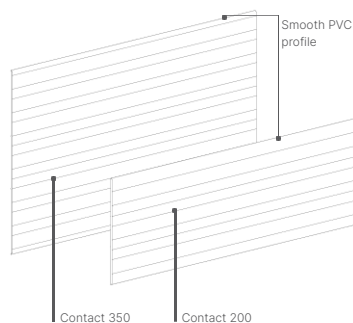

Contact 350 standard colours



Contact 200 standard colours



Special order colours\*

Contact 200

Contact 350

\*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# HEADBOARD PROTECTION LINEA'BEDKIT



SPECIFICATIONS

[BIM OBJECT](#)

The LINEA'BEDKIT vertical headboard protection is specially designed to protect the walls from the impact of beds that are moved or raised, in the bedrooms of healthcare establishments.



HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES

<b>Height(s)</b>	600 mm
<b>Width</b>	40 mm
<b>Overall dimensions</b>	Up to 253 mm
<b>Material(s)</b>	PVC Aluminium
<b>Hygiene</b>	99.9% antibacterial 99.96% virucidal*
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	39 Through-coloured

### ✦ Fixing

The continuous aluminium profile equipped with the PVC profile is mounted on the aluminium spacers, which can be cut to size.

### 7 Installation mode


On aluminium plates covered with a white PVC rosette, 125 mm in diameter, with concealed metal expansion plugs (4 plugs per plate).

\*See page 8: Benefits

Standard colours [+](#)



Special order colours\* [+](#)



\*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.  
Click to discover.


[HEALTHCARE](#)

[EDUCATION](#)

[HOSPITALITY](#)

[RETAIL](#)

[+](#)

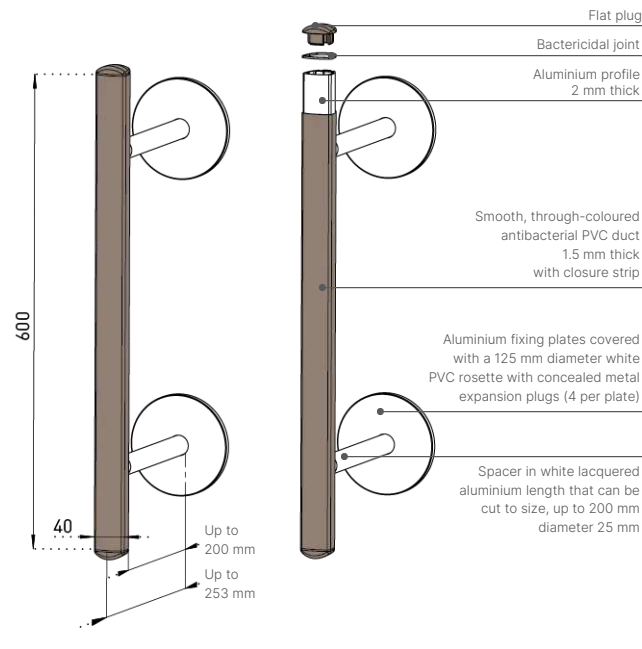

Flat plug

Bactericidal joint

Aluminium profile  
2 mm thickSmooth, through-coloured  
antibacterial PVC duct  
1.5 mm thick  
with closure stripAluminium fixing plates covered  
with a 125 mm diameter white  
PVC rosette with concealed metal  
expansion plugs (4 per plate)Spacer in white lacquered  
aluminium length that can be  
cut to size, up to 200 mm  
diameter 25 mmSCALE  
1:1.7

## WALL PROTECTION RAILS

## LINEA'PUNCH NEO



The Linea'Punch Neo wall protection rail is the ideal combination of impact resistance and design. Designed to blend in with the décor, it is the perfect match for Linea'Touch handrails.

Its narrow, bevelled end pieces minimise the space required and the distance to door frames.

It guarantees easy cleaning and optimum hygiene.

Quick and easy to fit, its double clipping system ensures perfect application. Very strong wall protection.



HOSPITALS CLINICS LABORATORIES WHITE ROOMS  
RETIREMENT HOMES BACK AREAS (HOTEL, RESTAURANT)


<b>Height(s)</b>	180 mm
<b>Length(s)</b>	4 m
<b>Overall dimensions</b>	25 mm
<b>Material(s)</b>	PVC Aluminium
<b>Hygiene</b>	99.9% antibacterial
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	39 Through-coloured
<b>Surface appearance</b>	Matt with central boss

#### ◆ Fixing

On aluminium clip.  
Option: On continuous aluminium rail.

#### ➤ Installation mode


The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

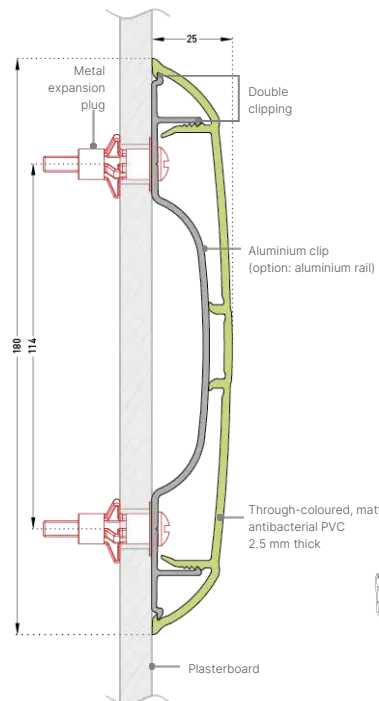

SCALE  
1:1.8

#### NOTE

The end-piece acts as the first clip.

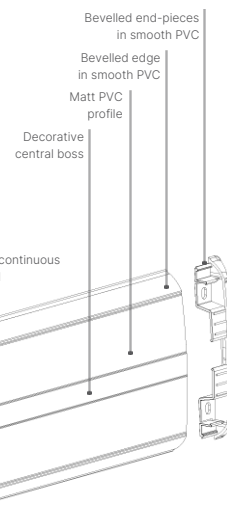

Standard colours +



Special order colours\* +



\*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.  
Click to discover.



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# WALL PROTECTION RAILS IMPACT




↓ SPECIFICATIONS

🔗 BIM OBJECT

The Impact wall protection rail is a horizontal wall protection rail with a rounded shape that perfectly combines impact resistance and aesthetics.

It can be installed at one or two heights to protect walls exposed to heavy trolley traffic in corridors, access zones and storage areas.




HOSPITALS CLINICS RETIREMENT HOME LABORATORIES  
WHITE ROOMS REAR AREAS (HOTELS - RESTAURANTS)

Height(s)	200 mm 120 mm 60 mm
Length(s)	4 m
Overall dimensions	30 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth with a few decorative grooves

◆ **Fixing**  
On aluminium clip.  
Option: On continuous aluminium rail.

➤ **Installation mode**  
The middle section of the profile is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection. Mounted by clipping onto "4-point" aluminium clips every 0.75 m maximum or, as an option, on a continuous aluminium rail.

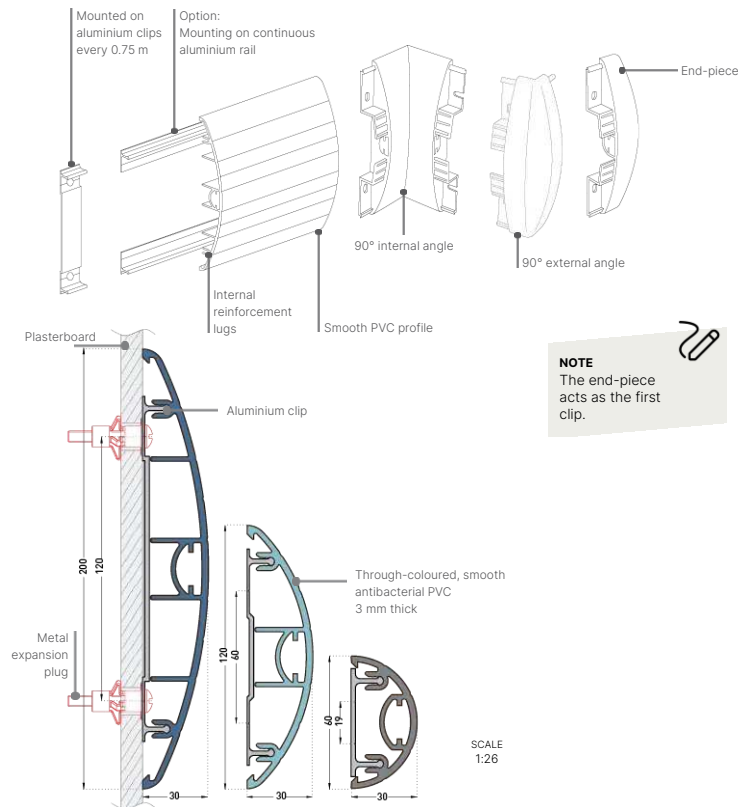


**NOTE**  
The end-piece acts as the first clip.

SCALE 1:26

Impact 200 & Impact 120 standard colours



Impact 60 standard colours



Special order colours\*

- Impact 200
- Impact 120
- Impact 60

\*Min. quantity: 200 LM. Lead times: contact us

E-brochures. By segment.  
Click to discover.



WALL PROTECTION RAILS  
**PUNCH'INOX**


The PUNCH'INOX wall protection rail is a made-to-measure kit solution, with welded end pieces.

This wall protection rail is recommended for exposed areas requiring a high level of hygiene.

It has 304 L food approval and is suitable for wet environments.

HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES PHARMACEUTICAL INDUSTRIES  
CENTRAL KITCHENS FOOD INDUSTRIES

<b>Height(s)</b>	200 mm 150 mm 100 mm
<b>Length(s)</b>	Customised (max. 2.50 m)
<b>Overall dimensions</b>	32 mm
<b>Material(s)</b>	Stainless steel 12/10th
<b>Contact with food</b>	Yes
<b>Surface appearance</b>	Brushed

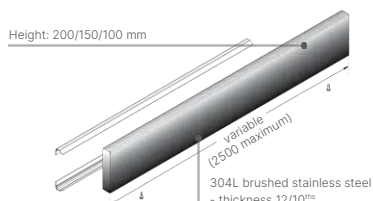


## ↓ SPECIFICATIONS



◆ **Fixing**  
On aluminium rail.

🔧 **Installation mode**  
The middle section of the wall protection rail is 0.80 m above the floor for mid-wall protection or above the skirting board for bottom section protection.

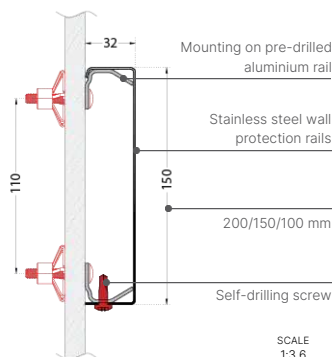

SCALE  
1:3.6


**PLAC'INOX**

The Plac'Inox protection plate reinforces areas exposed to impact.

It has 304L food approval and is suitable for high-traffic areas or wet environments.

HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES CENTRAL KITCHENS  
PHARMACEUTICAL INDUSTRIES FOOD INDUSTRIES

<b>Height(s)</b>	Customised (max. 1.25 m)
<b>Length(s)</b>	Customised (max. 2.50 m)
<b>Thickness</b>	10/10th (1 mm)
<b>Material(s)</b>	Stainless steel 10/10th
<b>Contact with food</b>	Yes
<b>Surface appearance</b>	Brushed

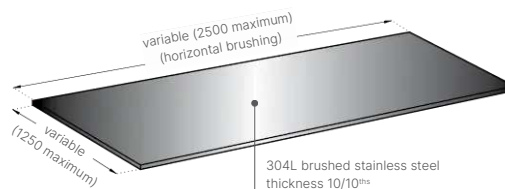

## ↓ SPECIFICATIONS

🔗 BIM OBJECT



◆ **Fixing**  
With SPM MS Polymer adhesive sealant or MS Polymer adhesive in buckets (no tacking time, ideal for wet rooms, patent pending).

🔧 **Installation mode**  
By SPM gluing as per SPECIFICATIONS.

WALL PROTECTION RAILS  
**ELASTO'PUNCH**

SPECIFICATIONS

BIM OBJECT

Thanks to their dense shapes, ELASTO'PUNCH wall protection rails effectively protect the walls most exposed to impact and friction from ride-on forklift trucks or heavy goods vehicles.

The black elastomer material makes it ideal for both indoor and outdoor use.



Elasto'punch 200E





Elasto'punch 100D

LOGISTICS CORRIDORS STORAGE AREAS WAREHOUSES  
CAR PARKS LOADING BAYS

<b>Height(s)</b>	Model 200 E: 200 mm Model 100 D: 100 mm
<b>Length(s)</b>	3 m
<b>Overall dimensions</b>	Model 200 E: 30 mm Model 100 D: 90 mm
<b>Thickness</b>	Model 200 E: 15 to 30 mm Model 100 D: 14 mm
<b>Material(s)</b>	Elastomer
<b>Colours</b>	Black Through-coloured

#### Fixing and Installation

Screw-mounted.

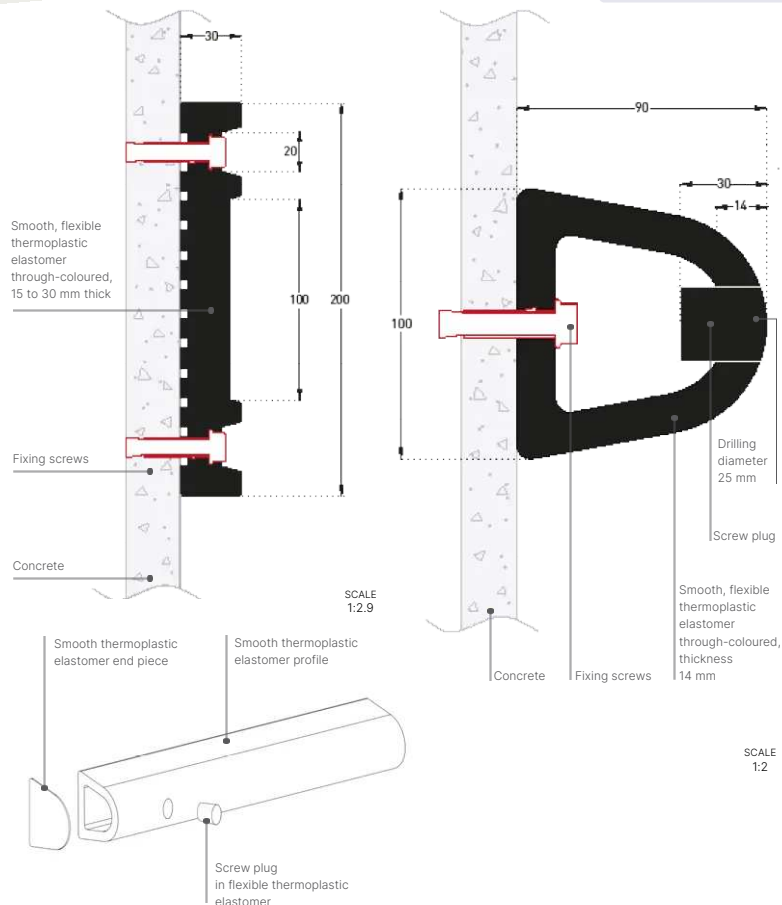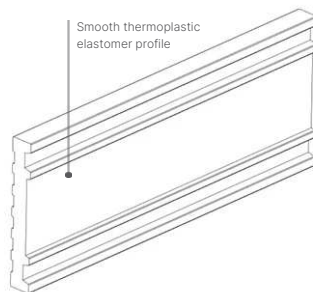

HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL






## DOOR PROTECTION

The constant comings and goings of customers, patients and staff, the impact of rolling stock, trolleys... Whatever the public access building, doors are put to a severe test.

SPM has developed a range of protective panels and handplates for total or partial cover, with the protection and decoration of the building as the number one objective.



Original and specific cut shapes, heat bending, frame protection... SPM offers a wide range of products to meet all your needs.

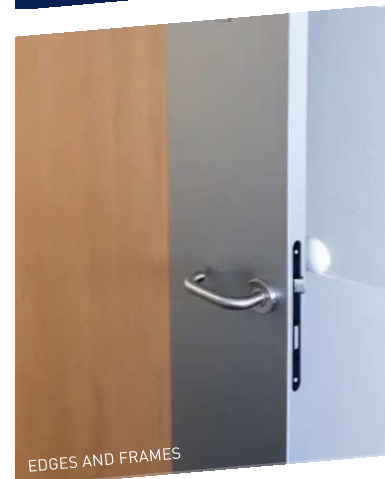

PROTECTION

# CONTENTS



Covering and protection



Signage



Technical solutions

FULL-HEIGHT DOOR	62	🚶	🛡️
HALF-HEIGHT DOOR	62	🚶	🛡️
FOOT-HEIGHT DOOR	62	🚶	🛡️
HALF-HEIGHT DECORATIVE DOOR	63	🚶	🛡️
EDGES & FRAMES	64	🚶	🛡️
HANDPLATES	65	🚶	🛡️

INLAID SIGNAGE	66	🚶	🛡️
----------------	----	---	----

TOOLS	68
-------	----

FIXING	69
--------	----

🚶 Traffic intensity  
🛡️ Resistance to impacts

# FULL-HEIGHT DOOR, HALF-HEIGHT DOOR & FOOT-HEIGHT DOOR



DECOCHOC, DECOWOOD and DECOTREND panels protect the entire door or its sensitive areas.

Matching our wall protectors, they can be used to create a uniform decor, play with contrasts or integrate signage.



HOSPITALS CLINICS RETIREMENT HOMES HOUSING  
SCHOOLS HOTELS RESTAURANTS

Height(s)	3 m
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

## Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

## Installation mode

By gluing as SPM SPECIFICATIONS.

## Customised option(s)

Cutting, L or U folding, thermoforming, chamfering.

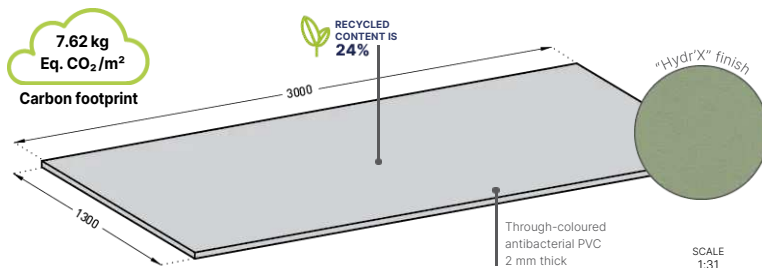

Recommended height of protection:  
- 1/2 height door:  
between 900 mm and 1300 mm  
- foot-height door:  
between 200 mm and 359 mm

## GOOD TO KNOW!

Plac'Inox: see page 58.  
Signage: see pages 66 and 67.

Standard colours



Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



\*See page 8: Benefits

# HALF-HEIGHT DECORATIVE DOOR

## SINGLE COLOUR OR TWO-TONE



SPM decorative ½ height doors guarantee effective protection of the lower part of the door - the most exposed -, integrating the handle or not, depending on your needs. Many cut shapes and colour combinations are available: single colour or two-tone for a classic or more original effect.

Shapes and colours make it easier to identify rooms, offices, technical rooms and services, and can match the colour of the floor or level. This is an essential point in the accessibility process.





HOSPITALS CLINICS RETIREMENT HOMES OFFICES  
SCHOOLS HOTELS RESTAURANTS SHOPS

Height(s)	1.20 m
Width(s)	930 mm 1230 mm
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

◆ **Fixing**   
With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

➤ **Installation mode**   
By gluing as per SPM SPECIFICATIONS.

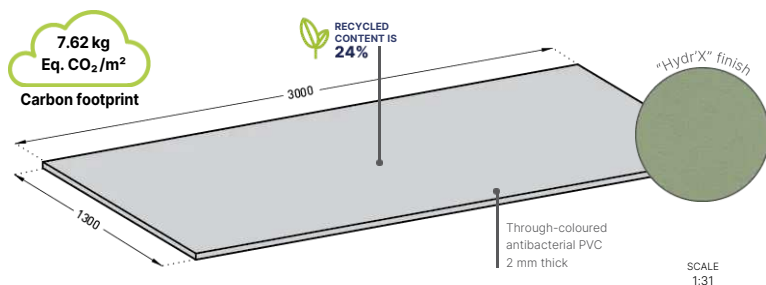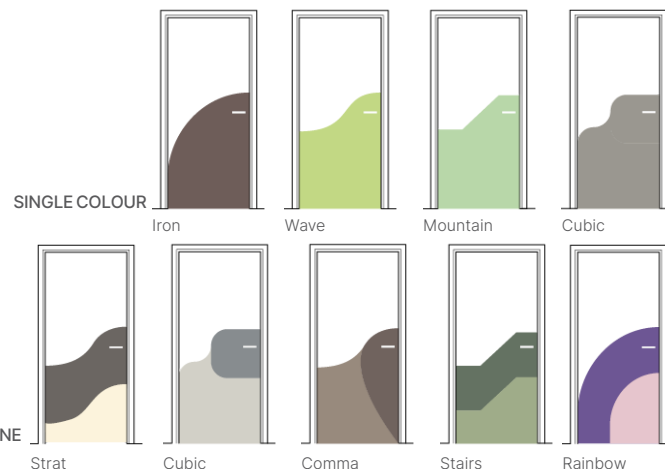

Standard colours



Discover the brochures  
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

\*See page 8: Benefits


# EDGES & FRAMES



↓ SPECIFICATIONS

🔗 BIM OBJECT

The L- or U-shaped bends of our protective and covering panels protect the edges and frames from repeated impacts and from damage caused by rising damp in certain rooms, thereby prolonging the life of the door units.

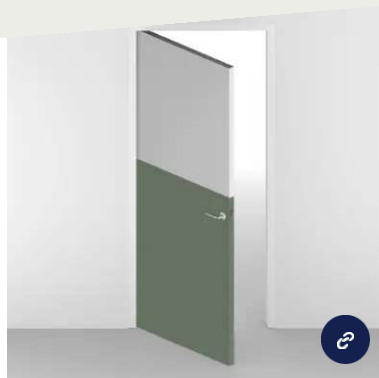


- HOSPITALS | CLINICS | RETIREMENT HOMES
- DISABILITY CENTRES | SCHOOL ESTABLISHMENTS
- HOTELS | RESTAURANTS | HOUSING | SHOPS

Height(s)	3 m
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO <sub>2</sub> /m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

◆ **Fixing**   
 With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

➤ **Installation mode**   
 By gluing as per SPM SPECIFICATIONS.

**GOOD TO KNOW!**   
 Panels can be thermoformed to protect complex frames.

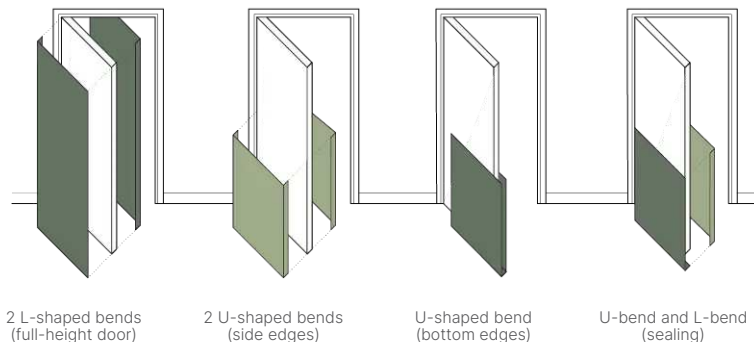


**Treatment of complex corners 2 solutions:**


**7.62 kg Eq. CO<sub>2</sub>/m<sup>2</sup>**  
**Carbon footprint**

**RECYCLED CONTENT IS 24%**

Through-coloured antibacterial PVC 2 mm thick

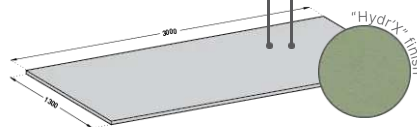

SCALE 1:75

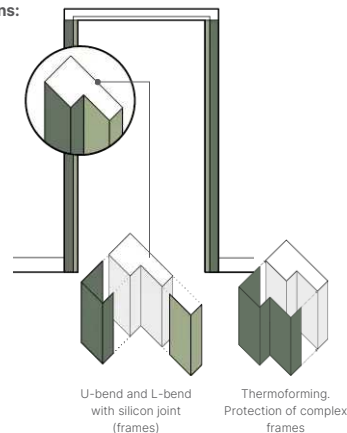

Standard colours



Discover the brochures  
 Access brochures by theme



\*See page 8: Benefits

## HANDPLATES



SPECIFICATIONS



BIM OBJECT

SPM backplates come in a variety of original shapes to decorate and protect the door around the handle.



DISABILITY CENTRES SCHOOL ESTABLISHMENTS  
HOSPITALS CLINICS RETIREMENT HOMES OFFICES  
HOTELS RESTAURANTS SHOPS MULTI-FAMILY HOUSING


<b>Height(s)</b>	3 m
<b>Length(s)</b>	1.30 m
<b>Thickness</b>	2 mm
<b>Material(s)</b>	PVC
<b>Hygiene</b>	99.9% antibacterial 99.96% virucidal*
<b>Fire rating</b>	Bs2d0
<b>Contact with food</b>	Yes
<b>Carbon footprint</b>	7.62 kg eq. CO2/m <sup>2</sup>
<b>Recycled content</b>	24%
<b>Average service life</b>	25 years
<b>Colours</b>	50
<b>Surface appearance</b>	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

#### ✦ Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

#### ➤ Installation mode


By gluing or use of adhesive as per SPM SPECIFICATIONS.




Plac'net




Delta




Eclipse




Wooden




Dan




Nö



Glass



Lady



Man

Standard colours



\*See page 8: Benefits

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# INLAID SIGNAGE



↓ SPECIFICATIONS

🔗 BIM OBJECT


SPM's door protection allows you to integrate personalised signage (numbers, letters, pictograms, drawings): durable, visible from a distance and easy to maintain.

A choice of two techniques:

Inlaid: integrated into the SPM protection.

Hollow: inverted relief, revealing the background colour of the door.

Two aesthetic, hygienic and economical solutions.

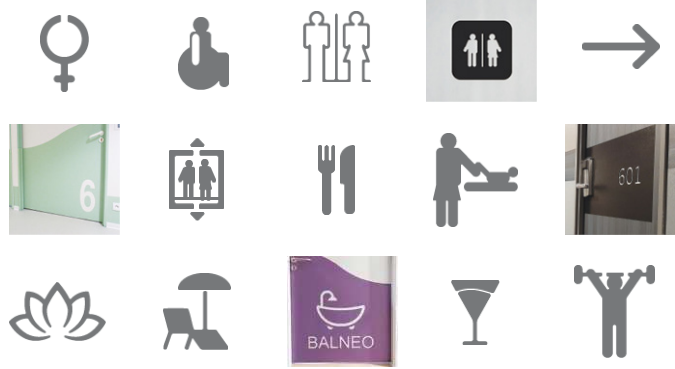

- HOSPITALS CLINICS RETIREMENT HOMES SPECIALIST FACILITIES SCHOOLS
- HOTELS RESTAURANTS HOUSING OFFICES SHOPS GYMS SPORTS HALLS

Height(s)	400 mm Customisation
Length(s)	1.30 m
Thickness	2 mm
Material(s)	PVC
Hygiene	99.9% antibacterial 99.96% virucidal*
Fire rating	Bs2d0
Contact with food	Yes
Carbon footprint	7.62 kg eq. CO2/m <sup>2</sup>
Recycled content	24%
Average service life	25 years
Colours	50
Surface appearance	Solid colours: lightly textured, matt "HydrX" finish Textured finish: wood, metal, concrete or Corten decor effect

◆ Fixing


With SPM acrylic adhesive or SPM MS Polymer adhesive (no tacking time, ideal for wet rooms, patent pending).

➤ Installation mode

By gluing or use of adhesive as per SPM SPECIFICATIONS.

GOOD TO KNOW!

You can find all SPM Decosign pictograms on page 44.

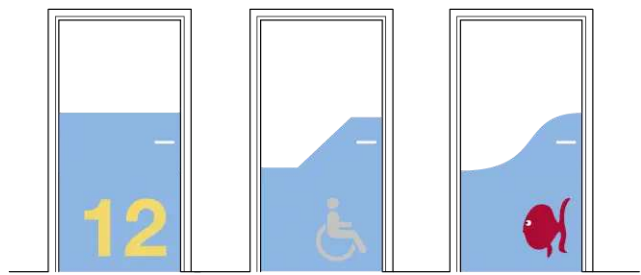

Signage Numbers

Signage Pictos

Early childhood signage - Fish -

Standard colours



Discover the brochures  
Access brochures by theme

- HEALTHCARE
- EDUCATION
- HOSPITALITY
- RETAIL

\*See page 8: Benefits





Before



After

Discover the brochures  
Access brochures by theme



# TOOLS

## LEISTER WALL WELDER CASE



Special case containing all the tools you need to make perfect welds between SPM panels or between SPM panels and vinyl flooring.

### CONTENT



Leister electric welding gun and a spare resistance



Rapid pinch nozzle, diameter 4/5 mm



Rapid triangular nozzle with vent 4/5 mm



Nozzle brush (Length 160 mm)



Mozart "2 in 1" levelling knife and 5 spare blades



Triangular groover (length: 24 cm 6 cm on side)



Levelling groover with round blade

## CUTTER WITH HOOK BLADE



Blade shape particularly suitable for cutting PVC profiles and panels.

### DESCRIPTION

- Aluminium and plastic cutter
- Length 140 mm
- With a tungsten carbide hook blade and a blade for all jobs

## DOUBLE-HANDLED SMOOTHING ROLLER



Ideal for smoothing SPM panels after gluing; high veneer pressure thanks to its double handles and easy handling.

### DESCRIPTION

- Roller length: 160 mm
- Roller diameter: 40 mm
- Dimensions (L x W x H): 210 mm x 180 mm x 120 mm

### VIDEO

Decochoc installation

WATCH VIDEO



SPM MS POLYMER is a patented adhesive designed for glueing wall protection panels.

- No tacking time
- Fast installation thanks to its high tack
- Ideal for use in wet environments
- Expansion can be divided by 4
- Bonding system complying with fire standard Bs1d0 and Bs2d0

It can be used on absorbent and non-absorbent substrates.



<b>Packaging</b>	11 kg (in bucket)
<b>Storage duration</b>	12 months (at room temperature in original packaging)
<b>Frost resistance</b>	-25°C
<b>Tacking time</b>	None
<b>Opening time</b>	40 minutes
<b>Consumption</b>	250 – 350 g/m <sup>2</sup>
<b>Application</b>	A2 type notched trowel
<b>Fire rating standard</b>	Bs1d0 - Bs2d0 with SPM, A+ panels
<b>Environment</b>	Solvent-free

#### Installation mode

Substrates must be dry, clean and free of all traces of adhesive (DTU 59-4). All porous surfaces must be primed. Apply 250g to 350g/m<sup>2</sup> (depending on the substrate) using an A2 notched trowel over the entire surface of the wall.

Smooth by pressing firmly over the entire surface from the centre outwards, crushing the glue grooves.

Joint treatment: after 24 hours.

#### Fixing

Glue opening exposure time: 40 minutes maximum under ideal application conditions of 18° to 25°C, a substrate temperature above 15°C and relative air humidity below 65%. Low temperature and low humidity extend working, setting and drying times, while high temperature and high humidity reduce them.

For smooth surfaces such as painted doors, use a light abrasive before applying the adhesive.

## FIXINGS



#### SPM universal primer

Use 100 to 150 g/m<sup>2</sup>.

5 L can



#### SPM acrylic adhesive

Simple solvent-free gluing. Use 250 to 320 g/m<sup>2</sup>.

Comes in 6 or 14 kg buckets



#### SPM MS Polymer adhesive sealant

In cartridges.

MS solvent-free polymer.

290 ml cartridge (approx. 25 m of beading)



#### Welding bead

For Decochoc, Decowood, Decotrend and Decoclean panels (assorted colours).

100 m spool



#### Double sided foam adhesive roll 4957/15

Width 15 mm.

25 m roll  
(please consult us before use)



#### Double sided adhesive roll 4970/50

Width of 50 mm for installation on doors or laminate.

50 m roll  
(please consult us before use)



#### Silicone joint

For Decochoc, Decowood, Decotrend and Decoclean panels (assorted colours).

310 ml cartridge (approx. 12 m of beading)





## CORNER PROTECTION

Often exposed to intense impact, corners need to be well protected.

SPM has developed a complete range of corner protectors designed to provide effective protection that does not cause injuries. Our corner protections are available:

- in adhesive form, for less exposed corners,
- on an aluminium base plate, for high-traffic areas.

All our models have the same properties:

- resistance to impact, cleaning products and disinfectants,
- Bs2d0 reaction to fire classification.



Our corner protectors are suitable for all corner and frame types, and even for renovation work.



PROTECTION

# CONTENTS



Adhesive corner protectors



Corner protectors on aluminium plate

PROFILA 50 & 30	73	AA	BB
PROTECTA 2	74	AA	BB
LINEA'FLEX	75	AAA	BB
PROFIL'INOX 50 & 30	76	AA	BB
SAFY'CORNER	77	AA	BB
SAFY'DOOR	77		
ELASTO'FLEX 100V	78	A	BB


COMBO'CORNER 75 & 50	79	AAA	BB
CORNEA	80	AAA	BB
CORNEAFLEX	81	AAA	BB



LE CORBUSIER HOSPITAL - FIRMINY  
Protecta 2 corner protectors/Decoprint panels

Architects: @colombenciariano - Justine Rubyz Photos: @annavazelle

- AA Traffic intensity
- BB Resistance to impacts

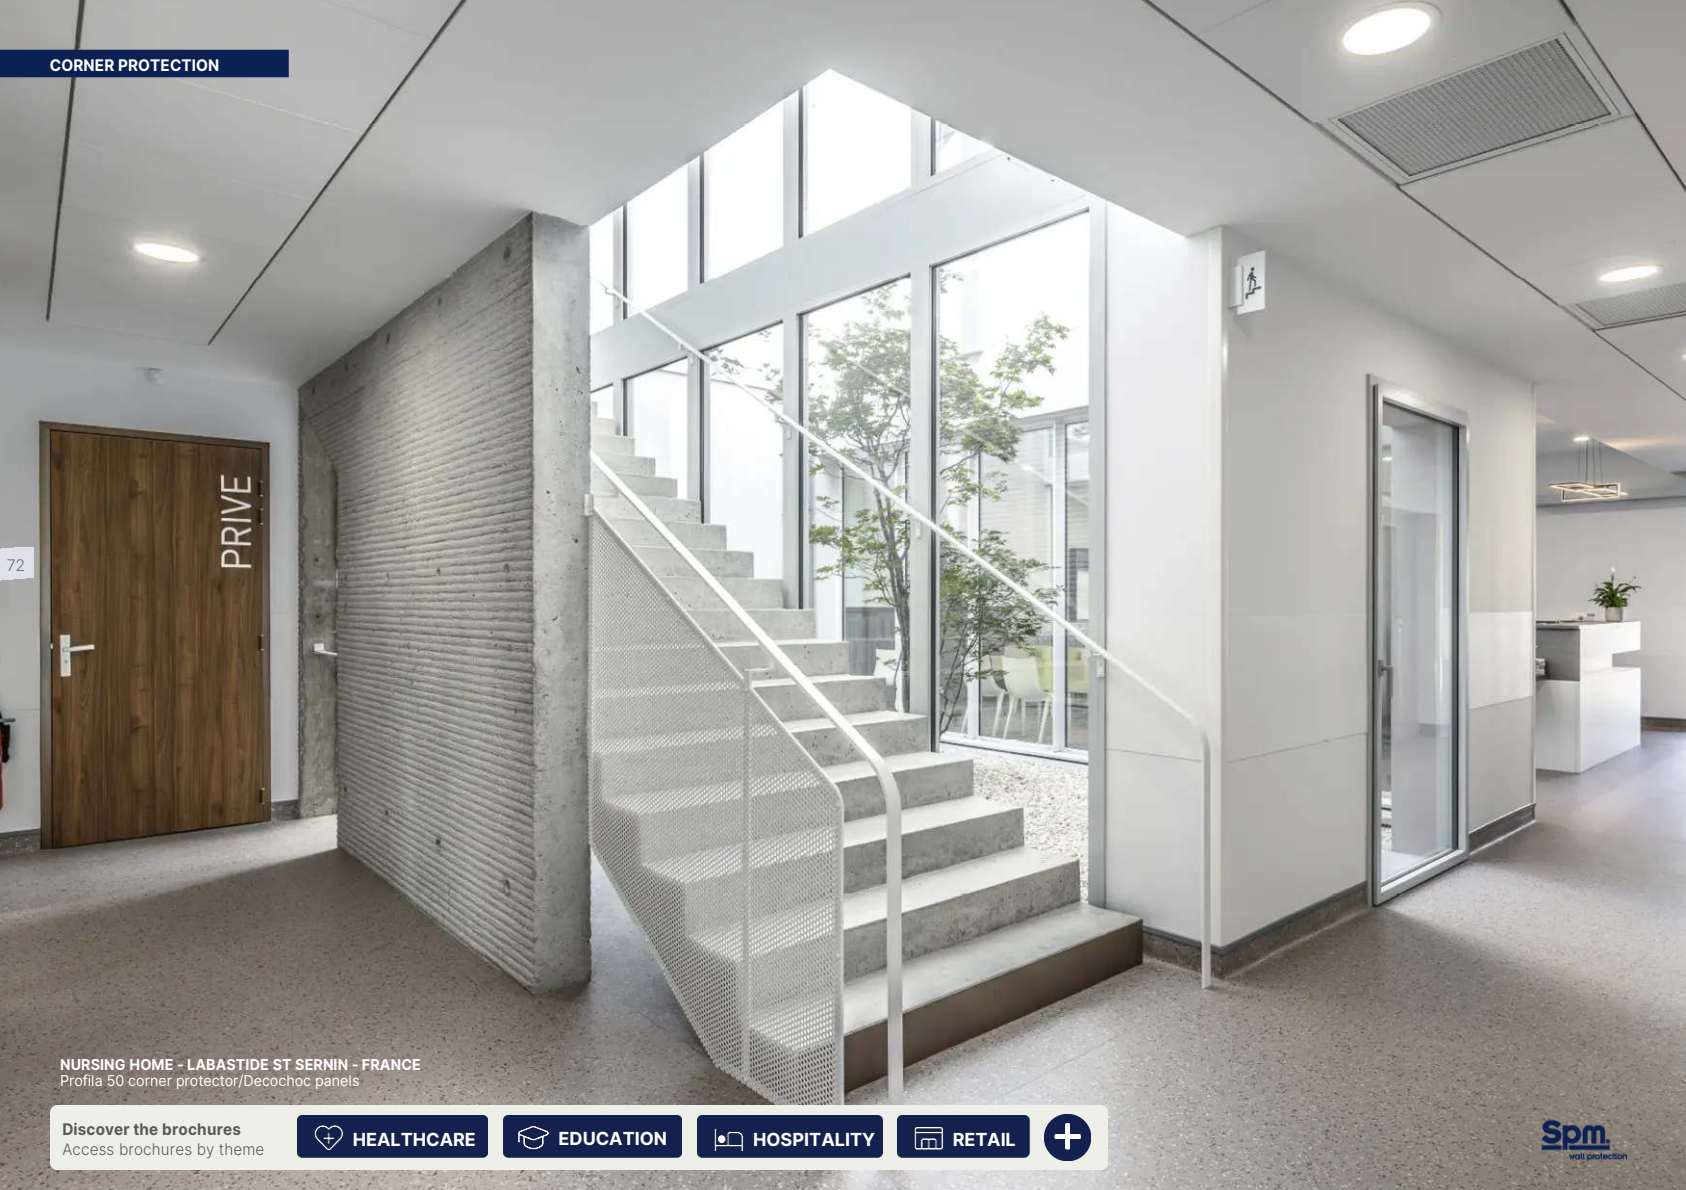

NURSING HOME - LABASTIDE ST SERVIN - FRANCE  
Profila 50 corner protector/Decochoc panels

Discover the brochures  
Access brochures by theme

 HEALTHCARE

 EDUCATION

 HOSPITALITY

 RETAIL



# ADHESIVE CORNER PROTECTORS

## PROFILA 50 & 30




SPECIFICATIONS

BIM OBJECT

PROFILA 50 and 30 finish corner protectors can be integrated into any interior to protect corners, and are quick and easy to fit thanks to two strips of double-sided adhesive.

Profila 30 can also be used to protect certain door frames.

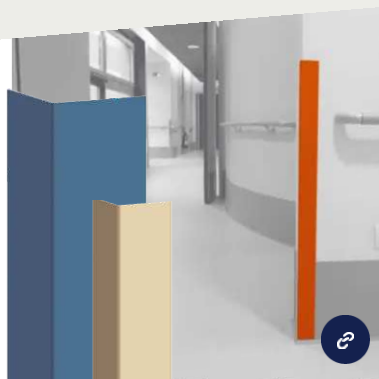

HOSPITALS CLINICS RETIREMENT HOMES OFFICES  
HOTELS RESTAURANTS SHOPS



Height(s)	1.30 m 2 m 4 m
Width of wings	50 mm Profila 50 30 mm Profila 30
Thickness	2 mm
Angular opening	90°
Material(s)	PVC
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth

### Fixing


Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

### Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).

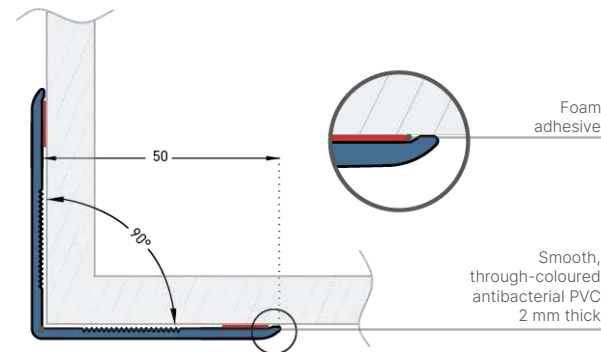

SCALE 1:1.2

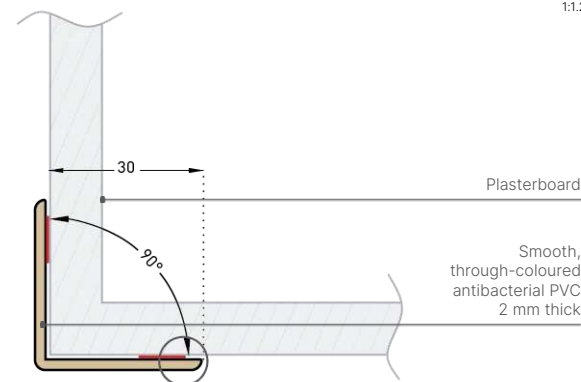

SCALE 1:1.1

Standard colours



Discover the brochures  
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

# ADHESIVE CORNER PROTECTORS

## PROTECTA 2



SPECIFICATIONS

[BIM OBJECT](#)

The PROTECTA 2 corner protector, with its rounded edging, provides effective, decorative and economical protection.

It protects all wall corners exposed to repeated impacts.

With two strips of foam adhesive, it's quick and easy to mount.




HOSPITALS CLINICS RETIREMENT HOMES OFFICES  
SCHOOLS HOTELS RESTAURANTS SHOPS

Height(s)	1.30 m 2 m 4 m
Width of wings	60 mm
Thickness	2 mm
Angular opening	50° to 155°
Material(s)	PVC
Hygiene	99.9% antibacterial
Fire rating	Bs2d0
Colours	39 Through-coloured
Surface appearance	Smooth

**Fixing**  
Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

**Installation mode**  
With included adhesive tape (additional reinforcement with SPM glue is recommended).

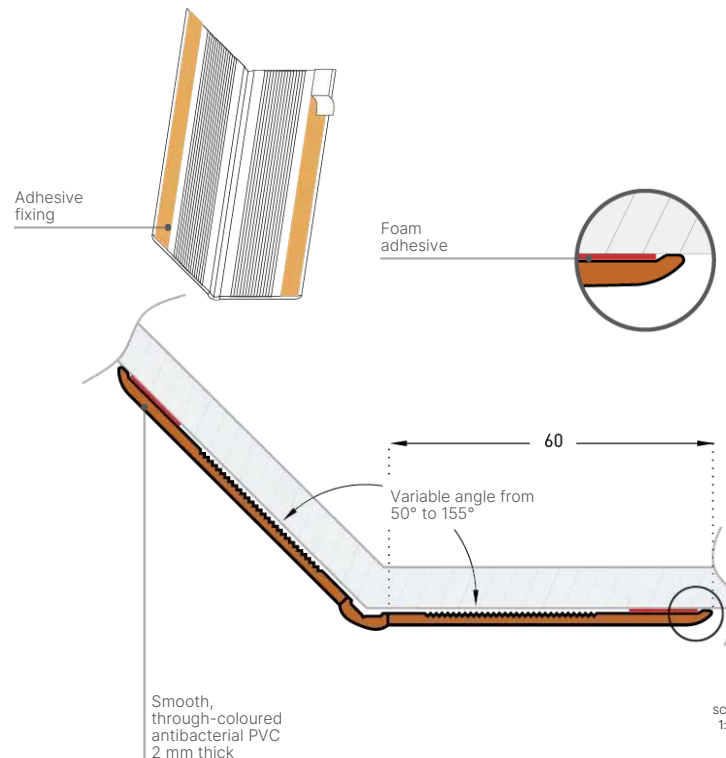SCALE  
1:1.1

Standard colours



Discover the brochures  
Access brochures by theme

**HEALTHCARE**
**EDUCATION**
**HOSPITALITY**
**RETAIL**

# ADHESIVE CORNER PROTECTORS

## LINEA'FLEX



SPECIFICATIONS


BIM OBJECT

The LINEA'FLEX corner protection combines strength, flexibility and discretion.

It provides effective protection for all wall corner protectors from 80° to 115°, thanks to its flexible central section supported by 2 shock absorbers for extra strength.

Equipped with a variable-angle plug, it adapts to any height and guarantees perfect hygiene.

With two strips of foam adhesive, it's quick and easy to mount.

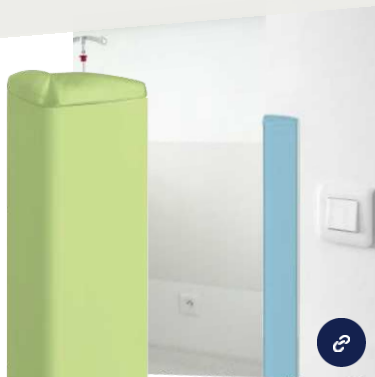

HOSPITALS CLINICS RETIREMENT HOMES OFFICES  
HOTELS RESTAURANTS FACILITIES SHOPS



<b>Height(s)</b>	1.30 m 2 m 4 m
<b>Width of wings</b>	45 mm
<b>Thickness</b>	1 to 3 mm
<b>Angular opening</b>	80° to 115°
<b>Material(s)</b>	PVC
<b>Hygiene</b>	99.9% antibacterial
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	39 Through-coloured
<b>Surface appearance</b>	Smooth

### Fixing

Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

### Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).

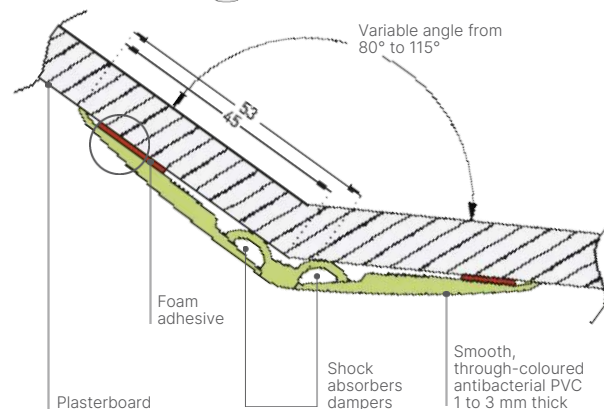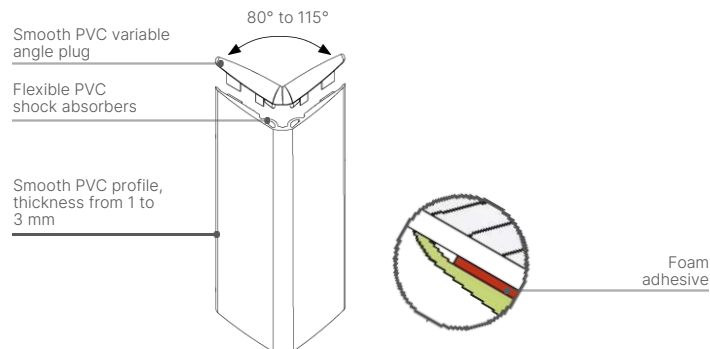

Standard colours



Discover the brochures  
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY

RETAIL

SCALE  
1:1.1

# ADHESIVE CORNER PROTECTORS

## PROFIL'INOX 50 & 30



SPECIFICATIONS

BIM OBJECT

PROFIL'INOX corner protector features a rounded corner edge and slightly bevelled flanges.

It protects 90° corners exposed to impact and has food approval. It is ideal for wet environments.



HEALTHCARE FACILITIES RETIREMENT HOMES  
HOTELS RESTAURANTS CENTRAL KITCHENS  
AGRI-FOOD INDUSTRIES PHARMACEUTICAL INDUSTRIES



<b>Height(s)</b>	2.50 m
<b>Width of wings</b>	50 mm 30 mm
<b>Thickness</b>	10/10 <sup>ths</sup>
<b>Angular opening</b>	90°
<b>Material(s)</b>	Stainless steel (304 L)
<b>Contact with food</b>	Yes
<b>Surface appearance</b>	Brushed

### ★ Fixing


Adhesive strip to be reinforced with SPM MS Polymer adhesive sealant.

### 7 Installation mode

With included adhesive tape (additional reinforcement with SPM glue is recommended).

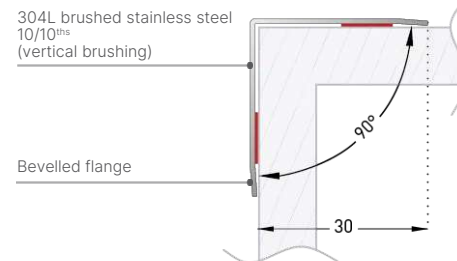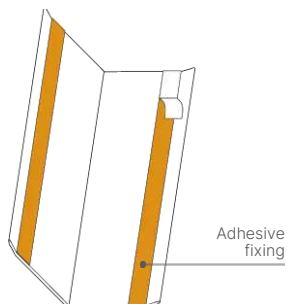

SCALE 1:1

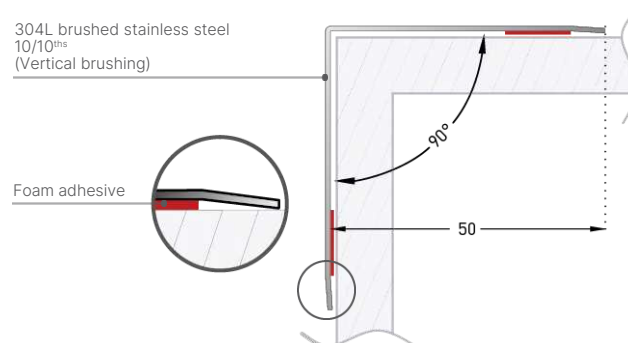

SCALE 1:1.1

Standard colours

Brushed finish

Discover the brochures  
Access brochures by theme




## CORNER PROTECTION

# ADHESIVE CORNER PROTECTORS SAFY'CORNER

The SAFY'CORNER90° self-adhesive shock-absorbing corner protector protects people against impact from a sharp angle.


The flexibility of its elastomer material gives it a high impact absorption capacity, minimising the risk of injury.

With two strips of foam adhesive and a protective film, it's easy to mount and clean.

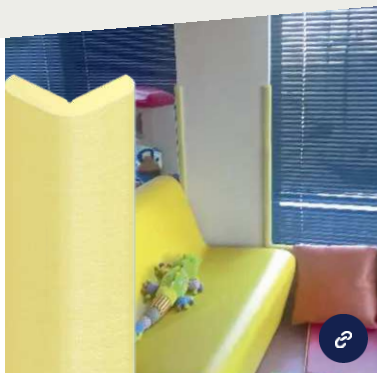

NURSERIES, NURSERY SCHOOLS RETIREMENT HOMES  
DISABILITY CENTRES GYMNASIUMS


Height(s)	1.30 m
Width of wings	25 mm
Thickness	11 mm
Angular opening	90°
Material(s)	Elastomer
Colours	4 Through-coloured
Surface appearance	Smooth



Standard colours



**Fixing and Installation**  
By adhesion with foam adhesive tape.

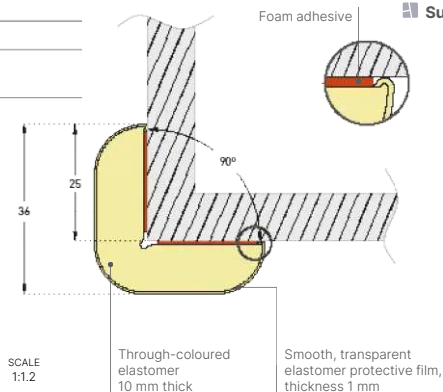

## SPECIFICATIONS

# DOOR FINGER PROTECTION SYSTEM SAFY'DOOR


The SAFY'DOOR finger-pinch proof door system secures doors, whether they are single or swing-opening.

The specific geometry of the strong, flexible bellows prevents fingers from getting into the door rebates.

The Safy'Door finger-pinch proof device improves safety in areas frequented by children and staff alike, by preventing a major cause of accidents with serious consequences.

NURSERIES, NURSERY SCHOOLS RETIREMENT HOMES  
DISABILITY CENTRES CENTRAL KITCHENS HOTELS RESTAURANTS

Height	1.40 m
Width	170 mm (rebate side) 70 mm (hinge side)
Thickness	2 mm
Materials	Elastomer
Colours	4 Through-coloured
Surface appearance	Smooth

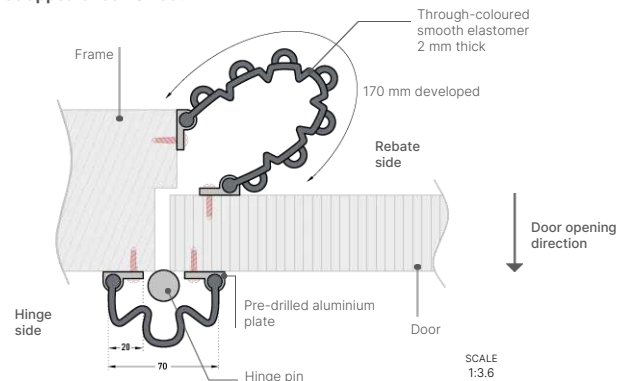

## SPECIFICATIONS

BIM OBJECT



**Fixing**  
Mounted on pre-drilled aluminium plates.

**Installation mode**  
Screwed to the door and frame.

Discover the brochures  
Access brochures by theme



# SCREW-ON CORNER PROTECTORS

## ELASTO'FLEX 100V




SPECIFICATIONS

BIM OBJECT

ELASTO'FLEX 100V variable corner protector is the highly resistant protection for 45° to 135° corners in your industrial buildings.


It blends in perfectly with all types of areas subject to severe impacts, and its black elastomer material makes it ideal for both indoor and outdoor use.

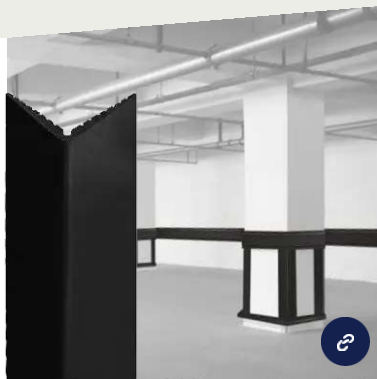


INDUSTRIES HEALTHCARE FACILITIES CENTRAL KITCHENS

<b>Height(s)</b>	3 m
<b>Width of wings</b>	100 mm
<b>Thickness</b>	End: 4 mm Corner edge: 10 mm
<b>Angular opening</b>	45° to 135°
<b>Material(s)</b>	Flexible elastomer
<b>Colours</b>	Black
<b>Surface appearance</b>	Smooth

★ **Fixing and Installation**  
Screwed in with fixing screw.



Smooth thermoplastic elastomer profile

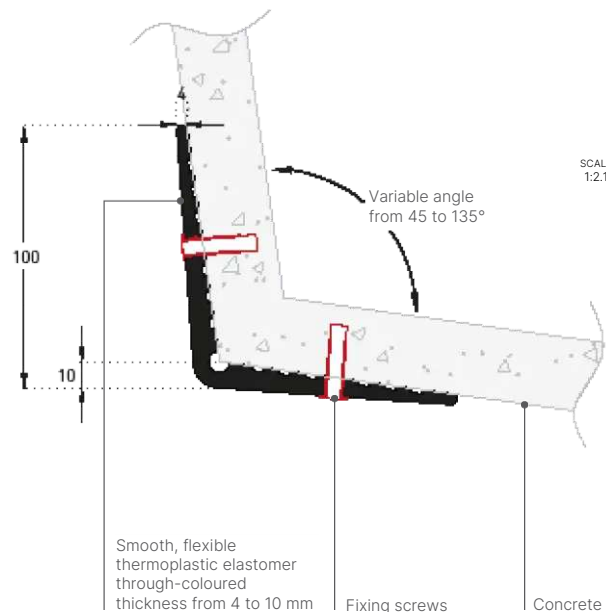

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



CORNER PROTECTORS ON ALUMINIUM PLATE

## COMBO'CORNER 75 &amp; 50



SPECIFICATIONS



BIM OBJECT

COMBO'CORNER 75 and 50 angle irons on aluminium plates protect 90° and 135° corners and are highly effective in high-traffic areas for people and materials.



HEALTHCARE FACILITIES | SCHOOLS

<b>Height(s)</b>	1.30 m 2 m 4 m
<b>Width of wings</b>	46 mm Combo Corner 50 68 mm Combo Corner 75
<b>Overall dimensions</b>	End: 6 mm Corner edge: 10 mm
<b>Angular opening</b>	90° Combo Corner 75 and 50 135° Combo Corner
<b>Material(s)</b>	PVC Aluminium
<b>Hygiene</b>	99.9% antibacterial
<b>Colours</b>	39 Through-coloured
<b>Surface appearance</b>	Smooth or slightly textured matte (HydrX finish)


**Fixing**  
Screwed to walls using metal expansion plugs.

**Installation mode**  
On aluminium plate.

Standard colours



Special order colours



\*Min. quantity: 200 LM. Lead times: contact us

Discover the brochures  
Access brochures by theme



HEALTHCARE




EDUCATION




HOSPITALITY



RETAIL

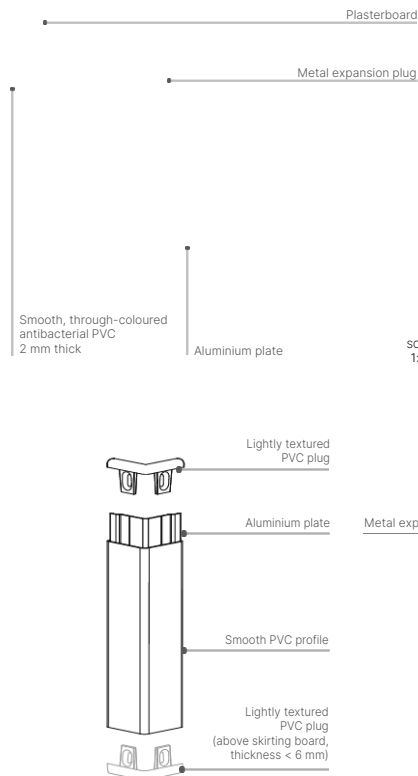

SCALE 1:1.5

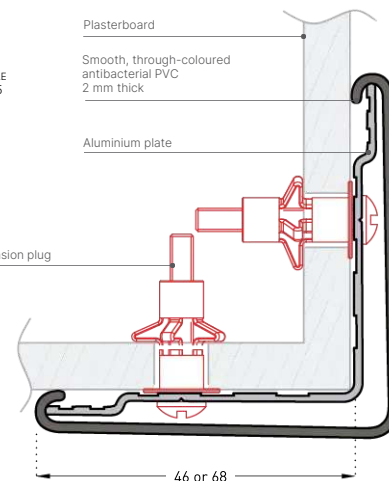

SCALE 1:0.8

## GOOD TO KNOW!

COMBO'CORNER 75 is also available in a 135° angle version.

CORNER PROTECTORS ON ALUMINIUM PLATE  
**CORNEA**

SPECIFICATIONS



BIM OBJECT

CORNEA is a high-resilience corner protector thanks to the unique design of its rounded edge.

It provides effective protection that does not cause injuries for 90° corners exposed to violent impacts from trolleys, stretchers, etc.





HOSPITALS CLINICS LABORATORIES  
CENTRAL KITCHENS SCHOOLS

Height(s)	1.30 m 2 m 4 m
Width of wings	60 mm
Thickness	2.5 mm
Angular opening	90°
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial
Colours	39 Through-coloured
Surface appearance	Smooth

**Fixing**  
Screwed to walls using metal expansion plugs.


**Installation mode**  
On pre-drilled aluminium plate.

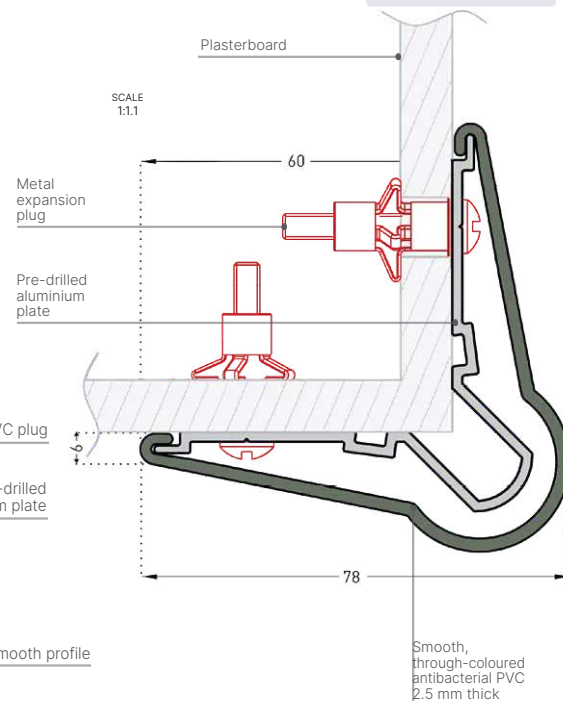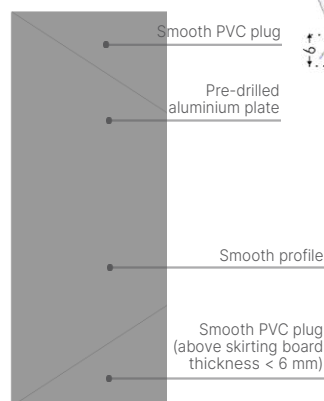

Standard colours



Special order colours\*



\*Min. quantity: 200 LM. Lead times: contact us

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# CORNER PROTECTORS ON ALUMINIUM PLATE


## CORNEAFLEX



CORNEAFLEX corner protectors provide high-performance protection for 135° or variable-angle wall corners.

They have a robust flexible edging and flexible PVC reinforcement beads.


It will not injure people and protects all corners of walls subject to heavy traffic.

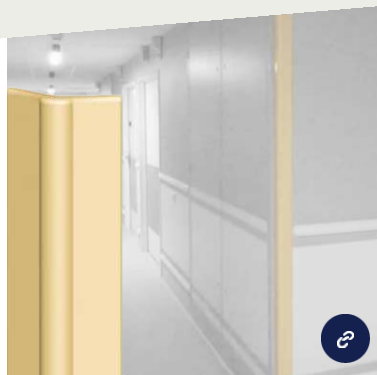

HEALTHCARE FACILITIES LABORATORIES  
CENTRAL KITCHENS SCHOOLS

<b>H</b> Height(s)	1.30 m 2.00 m 4.00 m 4.00 m Variable angle	} 135°
<b>W</b> Width of wings	65 mm	
<b>K</b> Thickness	2.5 mm flanges 3.5 mm edging	
<b>K</b> Angular opening	135°: fixed angle 80° to 135°: variable-angle	
<b>M</b> Material(s)	PVC Aluminium	
<b>H</b> Hygiene	99.9% antibacterial	
<b>C</b> Colours	5 Through-coloured	
<b>S</b> Surface appearance	Smooth	

Standard colours



**✦ Fixing**

Screwed to walls using metal expansion plugs.

**7 Installation mode**

On a 135° pre-drilled aluminium plate or in 2 parts aluminium plates to be drilled for variable angles.



SPECIFICATIONS

BIM OBJECT

Plasterboard

Metal expansion plug

- Fixed angle 135°  
- Variable angle from 80° to 135°

SCALE  
1:1

Smooth, through-coloured antibacterial PVC 2.5 mm thick

PVC flexible reinforcement bead

Smooth, through-coloured antibacterial PVC 3.5 mm thick

Pre-drilled aluminium plate

### VARIABLE-ANGLE CORNEAFLEX

### 135°CORNEAFLEX

2 aluminium plates

Flexible edging with two flexible PVC reinforcement beads

Smooth PVC profile

Smooth PVC plug\*

1 pre-drilled aluminium plate\*

Flexible edging with two flexible PVC reinforcement beads

Smooth PVC profile

\* For 135° angles only

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL





ESCORT®DUO

## HANDRAILS

SPM handrails have been carefully designed to help people move around:

- ergonomic,
- visual guidance: many colours, integrated LED lighting,
- associated wall protection.

SPM handrails are real barriers to airborne germs, helping to effectively combat the proliferation of micro-organisms and the development of infections through high-performance materials and bactericidal joints that resist even the most demanding cleaning.



ESCORT DECOWOOD

\* 99.96% virucidal activity against the human coronavirus HCoV-229E after a contact time of 2 hours.



LINEA TOUCH PVC SHEATHED



ESCORT DOUBLE HEIGHT

Whether antibacterial and virucidal\* or made of aluminium, our systems can be adapted to any situation:

- Technical ducts;
- Curved walls;
- Angles other than 90°;
- Stairs.



LINEA DUO LED

ACCESSIBILITY

# CONTENTS



Tubular handrails



Wall protection handrails

LINEA'TOUCH _____	84	AAA	AB
LINEA'TOUCH LED _____	84	AAA	AB
ESCORT _____	88	AAA	AB

STARLINE _____	90	AAA	AB
PERFORMER 2 _____	91	AAA	AB
ESCORT'DUO _____	92	AAA	AB
LINEA'DUO _____	92	AAA	AB
LINEA'DUO LED _____	93	AAA	AB



#### GOOD TO KNOW!

All SPM handrails are fitted with bactericidal joints that are through-coloured and resistant to cleaning. Proven by an independent laboratory, this action complements the bacteriostatic and antibacterial properties of our smooth-finish handrails.



DIBBA HOSPITAL - UNITED ARAB EMIRATES  
DecoChoc panels / Linea'Touch LED handrail

AAA Traffic intensity  
AB Resistance to impacts

# TUBULAR HANDRAILS

## LINEA'TOUCH



SPECIFICATIONS



BIM OBJECT

The LINEA'TOUCH handrail combines design, ergonomics and high impact resistance.

Its exclusive tri-lobed shape, approved by ergonomists, ensures an excellent grip while providing discreet protection for walls.

With a wide range of accessories and colours, it offers a multitude of combinations:

- Variety of solid colours;
- Wood effects with an ultra-realistic feel;
- 100% anodised version or mixed with wood decors and solid colours.

It can be curved and offers several technical solutions to ensure continuity in staircases and in front of service ducts.

HOSPITALS CLINICS RETIREMENT HOMES REHABILITATION CENTRES  
DISABILITY CENTRES

Height(s)	42 mm
Width(s)	40 mm
Length(s)	4 m
Overall dimensions	80 mm (90 mm on request)
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joints
Fire rating	Bs2d0
Colours	46
Surface appearance	Solid colours: smooth Wood aspect: textured finish

\*See page 8: Benefits

Standard colours + Standard colours +



Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



### INNOVATION



This handrail is available in an LED version, which now offers a user guidance system thanks to the integrated lighting.

The 3 PVC-coated, Anodised and DECOWOOD finishes are available with the LED option.

### GOOD TO KNOW!



Available in a reinforced version, to ensure design continuity throughout the establishment, whatever the level of protection required.

### Fixing



Mounted on a self-locking bracket, to be screwed to the wall.

### Installation mode



The top of the profile is a maximum of 0.90 m above the floor.

End pieces, plugs and corner protectors should be mounted on the wall using 2.5 m hexagon socket head tip screws.


### PVC SHEATHED



BACTERICIDAL optional



### ANODISED



### DECOWOOD



### LINEA'TOUCH LED



LINEA'TOUCHLED: a backlight version with an LED strip for optimum user guidance and comfort.

Operates with a 24 VDC 60 W dimmable driver, for a maximum handrail length of 8 m.


Internal/external corner pieces fitted with an electrical junction cord for connection to the LED strips.

The power supply can be installed in a suspended ceiling or an electrical cabinet for easy maintenance.

### Rapid'Angle®

Adapts to all staircase configurations with bends and slope angles (triple cardanic rotation) and all angles from 80° to 180°.

Special order colours\* +



\*Min. quantity: 200 Lm. Lead times: contact us

TUBULAR HANDRAILS  
**LINEA'TOUCH**


 **SPECIFICATIONS**

 **BIM OBJECT**


- Refined 20 mm support**  
Self-locking in silver anodised aluminium (80 mm overall dimensions)
- 55 mm bugled support**  
Self-locking silver anodised appearance aluminium (80 mm overall dimensions)
- Swan-neck support**  
with 70 mm self-locking rosette in brushed stainless steel (80 mm overall dimensions)

**LINEA'TOUCH + ENHANCED VERSION**


- 80 mm reinforced support**  
Aluminium self-locking silver anodised appearance. (overall dimensions 80 mm)
- SCALE 1:1.8

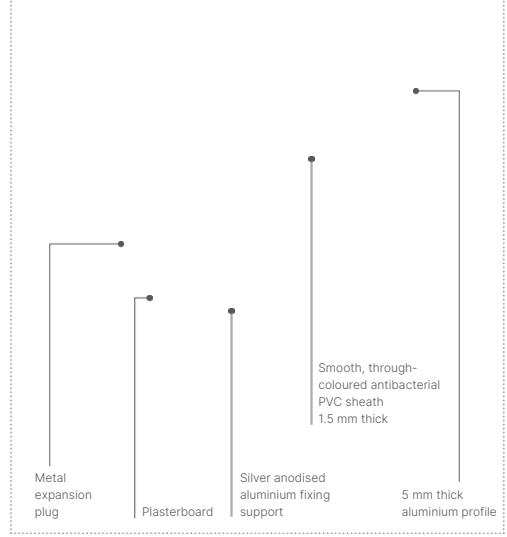

**LINEA'TOUCH**

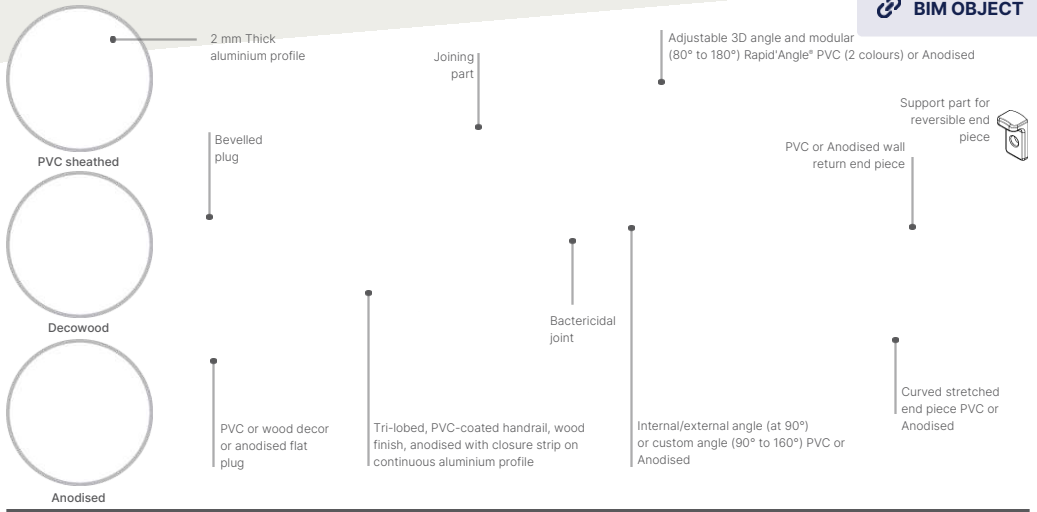

**LINEA'TOUCH LED**

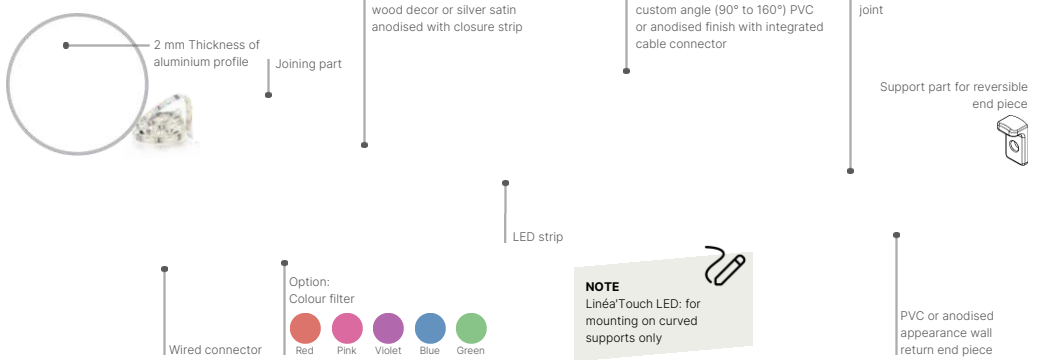

**NOTE**  
Linea'Touch LED: for mounting on curved supports only

Discover the brochures  
Access brochures by theme

 **HEALTHCARE**  **EDUCATION**  **HOSPITALITY**  **RETAIL** 



**Swan-neck support with rosette**  
**70 mm**  
self-locking in brushed stainless  
steel (overall dimensions 80 mm)

SCALE  
1:2.4

87



ACPPA NURSING HOME - VAULX-EN-VELIN - FRANCE  
Linea Touch handrail/Protecta 2 corner protector

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



# TUBULAR HANDRAILS

## ESCORT



SPECIFICATIONS

[BIM OBJECT](#)

The ESCORT handrail combines a good grip with sobriety and elegance.

Perfectly round and pleasant to the touch, it is very popular with people with reduced mobility.

It can be curved and offers a complete removable system to ensure the continuity of the handrail in front of service ducts.

HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES REHABILITATION CENTRE  
MULTI-FAMILY HOUSING HOTELS

<b>Length(s)</b>	4 m
<b>Width of handrail</b>	Diam. 40 mm
<b>Overall dimensions</b>	80 mm (90 mm on request) 40 mm (wall/handrail distance)
<b>Material(s)</b>	PVC Aluminium
<b>Hygiene</b>	99.9% antibacterial 99.96% virucidal* Bactericidal joint
<b>Fire rating</b>	Bs2d0
<b>Colours</b>	46
<b>Surface appearance</b>	Solid colours: smooth Wood aspect: textured finish

### Fixing

On self-locking brackets to be screwed to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

### Installation mode

The top of the profile is a maximum of 0.90 m above the floor. End pieces, plugs and corner protectors should be mounted on the wall using 2.5 mm hexagon socket head tip screws.

### PVC SHEATHED



BACTERICIDAL optional

### ANODISED



### DECOWOOD



### Rapid'Angle®

Adapts to all staircase configurations with bends and slope angles (triple cardanic rotation) and all angles from 80° to 180°.

### Rapid'Access®

Articulated joint, specially designed for technical ducts, with a quick-release key. (chalk colour or anodised appearance)

[WATCH VIDEO](#)


\*See page 8: Benefits

Standard colours +

Standard colours +



Special order colours\* +



Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY




RETAIL




\*Min. quantity: 200 LM. Lead times: contact us

TUBULAR HANDRAILS  
**ESCORT**



**80 mm perforated support**  
self-locking silver anodised appearance aluminium.  
(overall dimensions 80 mm)

SCALE  
1:1.6

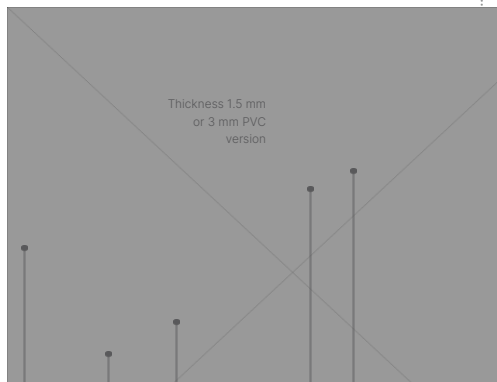

Metal expansion plug

Plasterboard

Silver anodised aluminium fixing support

Satin silver anodised aluminium diameter 40 mm

Hexagon socket head cap screw


**Swan-neck support**  
with 70 mm self-locking rosette in brushed stainless steel

SCALE  
1:2.2




**60 mm full support**  
self-locking in silver anodised appearance aluminium

SCALE  
1:2.2



**55 mm bugled support**  
self-locking in silver anodised appearance aluminium (overall projection 80 mm or 90 mm on request)

SCALE  
1:2.2

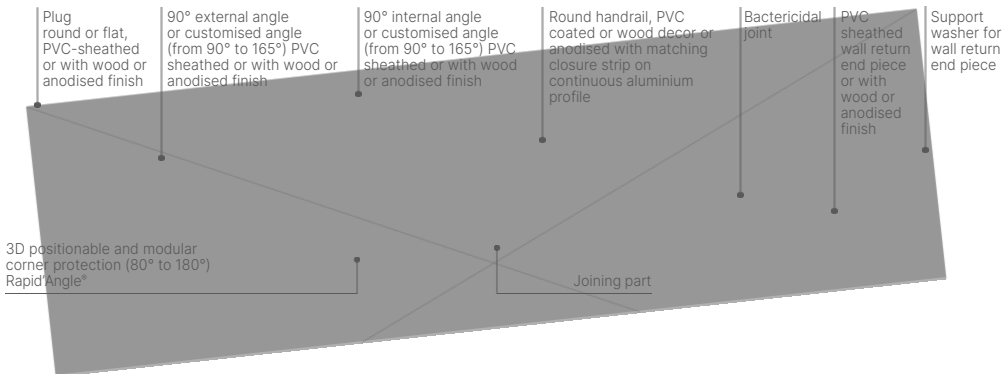

## WALL PROTECTION HANDRAILS

## STARLINE



SPECIFICATIONS



BIM OBJECT

The STARLINE bumper handrail combines technology and design.

This range of handrails is the ideal solution for elegantly equipping the circulation areas of all establishments open to the public.

Starline can be bent for curved wall sections and has a complete removable system to ensure the continuity of the handrail in front of service ducts.

Starline is fitted with bactericidal joints.

A choice of profiles and a multitude of strips available!

- Chalk, gravel or anodised finish aluminium profiles
- Strips: 50 colours and designs.

HOSPITALS CLINICS RETIREMENT HOMES HOTELS  
DISABILITY CENTRES LOCAL AUTHORITIES OFFICES

Height(s)	90 mm
Length(s)	4 m
Overall dimensions	80 mm
Width (handrail)	30 mm
Material(s)	PVC sheathed Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	Profile: 3 Strip: 50

\*See page 8: Benefits

Strip standard colours



Discover the brochures  
Access brochures by theme

HEALTHCARE

EDUCATION

HOSPITALITY


RETAIL



## STARLINE



BACTERICIDAL optional

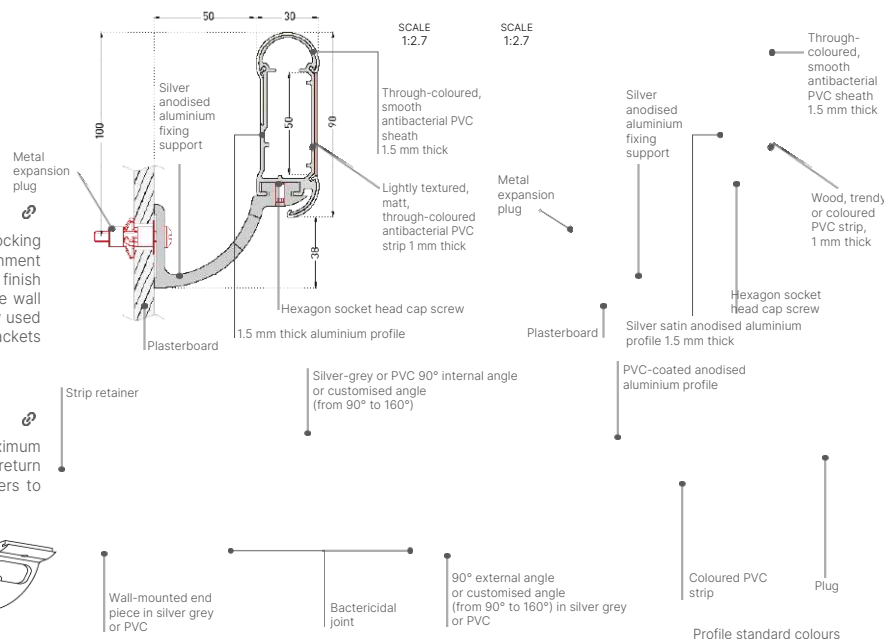

### Fixing

Interlocking fitting on self-locking openwork supports at 2 attachment points in silver anodised finish aluminium to be secured to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

### Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and external corners to be fixed with "pop rivets".

80 mm perforated support  
self-locking silver anodised finish aluminium



# WALL PROTECTION HANDRAILS

## PERFORMER 2



The PERFORMER2 bumper handrail provides excellent grip and wall protection in highly exposed traffic areas. Performer 2 is fitted with bactericidal joints. Quick and easy to install.



HOSPITALS CLINICS RETIREMENT HOMES  
DISABILITY CENTRES

Height(s)	140 mm
Length(s)	4 m
Overall dimensions	Minimum: 105 mm
Width(s) of handrail	50 mm Handrail section: ø 40 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	5 Through-coloured
Surface appearance	Handrail: smooth Wall protection rail: smooth with a few decorative grooves


### ◆ Fixing

Interlocking fitting on PVC support to be screwed to the wall every 1.20 m (0.80 m in heavily used corridors and on lighter wall brackets such as plasterboard).

### ➤ Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and external corners to be fixed with "pop rivets".

Fixing support with clamping screw

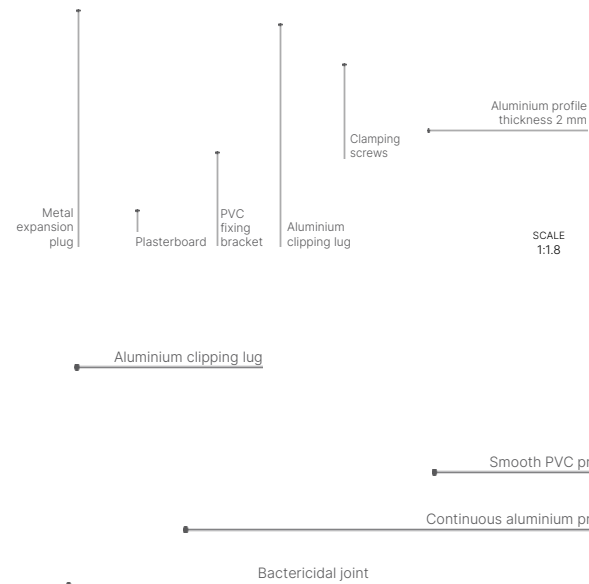


Diameter 40 mm

Antibacterial PVC through-dyed, thickness 3 mm

\*See page 8: Benefits

Standard colours +



Discover the brochures  
Access brochures by theme



WALL PROTECTION HANDRAILS

## ESCORT'DUO &amp; LINEA'DUO



ESCORT'DUO



DESCRIPTIF TYPE

LINEA'DUO



DESCRIPTIF TYPE

BIM OBJECT

The ESCORT'DUO and LINEA'DUO wall protection rails have been designed to provide the dual function of wall protection/handrail in rolling stock aisles that are subject to heavy impact loads.

They offer a range of options:


- Choose the shape of the top of the handrail:
  - Round with ESCORT'DUO or
  - Tri-lobed with LINEA'DUO.
- Choose option
  - Single colour
  - Two-tone to differentiate the handrail from the wall protection rail.

HOSPITALS CLINICS RETIREMENT HOMES DISABILITY CENTRES

Height(s)	150 mm
Length(s)	4 m
Overall dimensions	95 mm 50 mm (wall/handrail distance)
Width(s)	50 mm
Material(s)	PVC Aluminium
Hygiene	99.9% antibacterial 99.96% virucidal* Bactericidal joint
Fire rating	Bs2d0
Colours	Two tones possible Handrail: 39 colours Wall protection rails: 3 colours Through-coloured
Surface appearance	Handrail section: smooth Wall protection rail section: matt finish

\*See page 8: Benefits


Standard handrail colours +



Standard wall protection rail colours



Special order colours\* +



\*Min. quantity: 200 LM. Lead times: contact us

## GOOD TO KNOW!

LINEA'DUO comes in an LED version, compatible with a presence detector, a switch and a programmer.

## Fixing

On PVC support to be screwed to the wall every 0.80 m (0.60 m in heavily used corridors and on lighter wall brackets such as plasterboard).

## Installation mode

The top of the profile is a maximum of 0.90 m above the floor. Wall return end pieces and corners should be mounted on the wall using self-drilling screws.

## ESCORT'DUO



BACTERICIDAL optional

## LINEA'DUO &amp; LINEA'DUO LED



BACTERICIDAL optional

## Linea'Duo LED



LINEA'DUO LED: a backlit version with an LED strip for optimum user guidance and comfort.

Operates with a 24 VDC 60 W dimmable driver, for a maximum handrail length of 8 m.

Internal/external corner pieces fitted with an electrical junction cord for connection to the LED strips.

The power supply can be installed in a suspended ceiling or an electrical cabinet for easy maintenance.

## GOOD TO KNOW!

LED handrail installation guide available on request. Consult us.

Discover the brochures  
Access brochures by theme



HEALTHCARE



EDUCATION



HOSPITALITY



RETAIL



Spm  
wall protection

SUPPORT & SECTIONS


# ESCORT'DUO, LINEA'DUO & LINEA'DUO LED




ESCORT'DUO

LINEA'DUO

LINEA'DUO LED

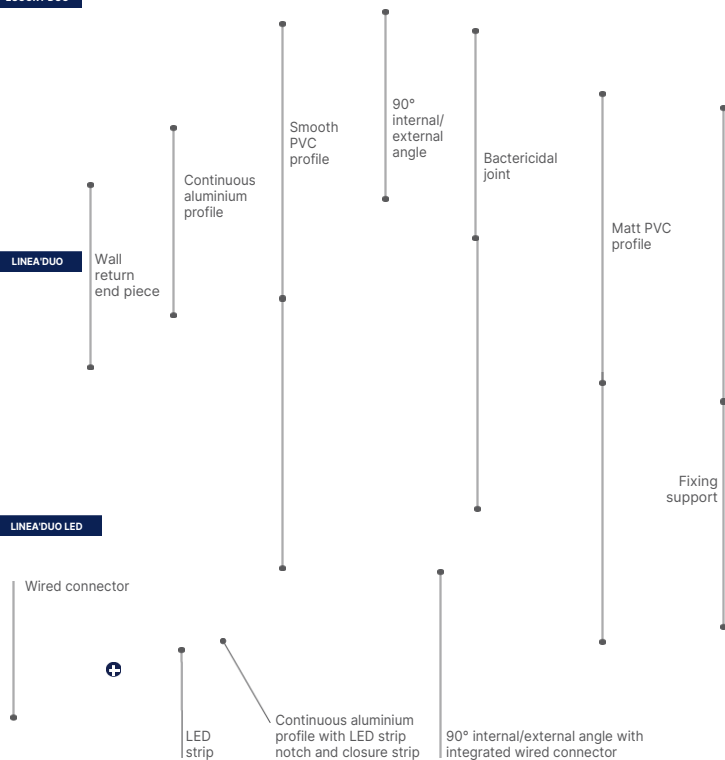


ESCORT'DUO

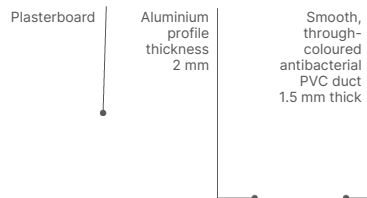


SCALE 1:2.3


LINEA'DUO

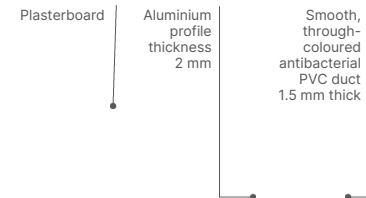

SCALE 1:2.3

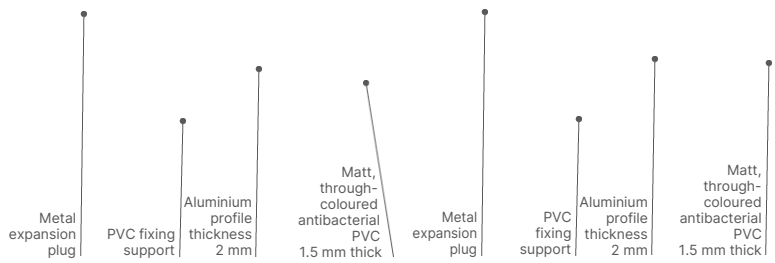

LINEA'DUO LED



Discover the brochures  
Access brochures by theme



# TECHNICAL SOLUTIONS FOR HANDRAILS

## PASSAGE IN FRONT OF SERVICE DUCTS

### APPLICATIONS

A quick-release system (keys) designed to facilitate access to service duct doors while ensuring the continuity of handrails and the safe accompaniment of people.

Available for Escort, Linea'Touch and Starline handrails.

### SERVICE DUCTS WIDER THAN 1100 MM



A quick-release bracket should be fitted to the service duct door.

### STARLINE HANDRAIL


For the Starline handrail, SPM can supply a ready-to-install kit (section up to 1100 mm; other dimensions on request).

Starline profile section (up to 1100 mm) specially machined for technical ducts (other dimensions on request)

### ESCORT AND LINEA'TOUCH HANDRAILS

For Escort and Linea'Touch handrails, the technical duct kit is made on site: cutting the profile to match the size of the technical duct door with two 45° cuts and two quick-release keys.

For the Escort handrail: Rapid'Access®, articulated joint, specially designed for technical ducts, with a quick-release key. (chalk colour or anodised appearance)

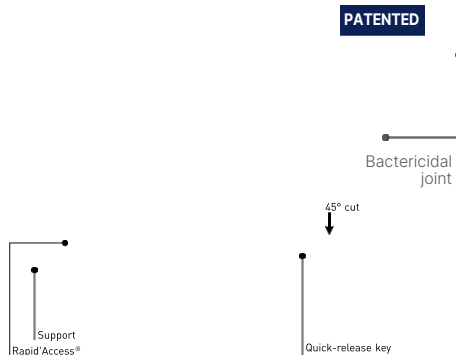


## BENDING

### APPLICATIONS

Bending of Starline, Escort and Linea'Touch handrails to adapt to different building configurations.

### CONVEX bending

### CONCAVE bending

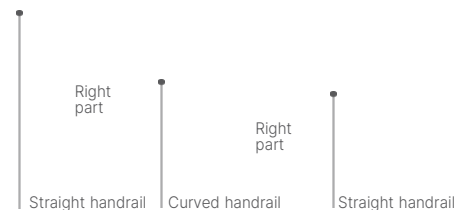

Discover the brochures  
Access brochures by theme



# TECHNICAL SOLUTIONS FOR HANDRAILS

## RAPID'ANGLE® FOR STAIRS AND ANGLES FROM 80° TO 180°

### APPLICATIONS


SPM has developed Rapid'Angle® for the Escort round handrail and the LineaTouch tri-lobed handrail, which adapts to:

- all staircase configurations with bends and slope angles (triple cardanic rotation)
- all angles from 80° to 180°.

### PATENTED

#### RAPID'ANGLE® ESCORT

also available for Linea Touch handrail.




Bactericidal joint

## ANTI-LIGATURE BRACKET

### APPLICATIONS


To deal with the potential risk of hanging in certain establishments (prisons, disability-adapted centres, etc.), SPM has engineered this anti-ligature bracket to ensure the safety of users. 500 mm long, they can be fitted continuously under the entire length of the Escort or Starline handrails.



## ESCORT TACTILE MARK

### APPLICATIONS


The unique tactile locating key to be fitted under the Escort handrail helps visually impaired people find their way around. Multiplied, it indicates the level you are on.

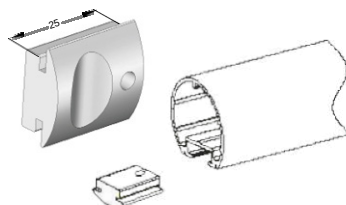


## DOUBLE-HEIGHT SUPPORT SPECIALLY FOR "ACCESSIBILITY": ESCORT

### APPLICATIONS

This double-height support makes it easy to install two levels of Escort handrails: one at standard height, and one for children and/or wheelchair users. The level of the lower handrail has been specially designed to help these people move around comfortably. This accessory makes installation easier, as only one horizontal mark is required for the two levels of handrails.




## HOSPITALS CLINICS - RETIREMENT HOMES DISABILITY CENTRES

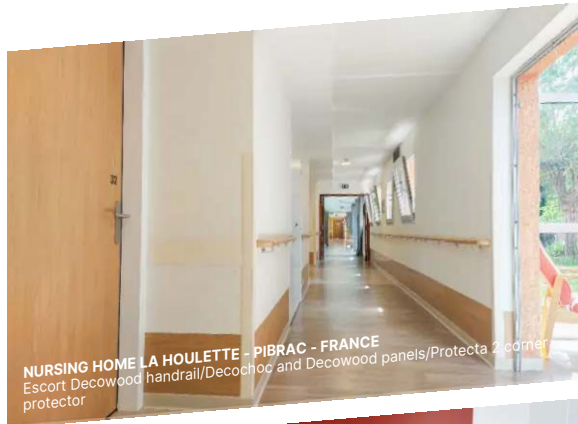



UNIVERSITY HOSPITAL CENTRE - REIMS - FRANCE  
Decochoc panels

© Fabrice Danelle

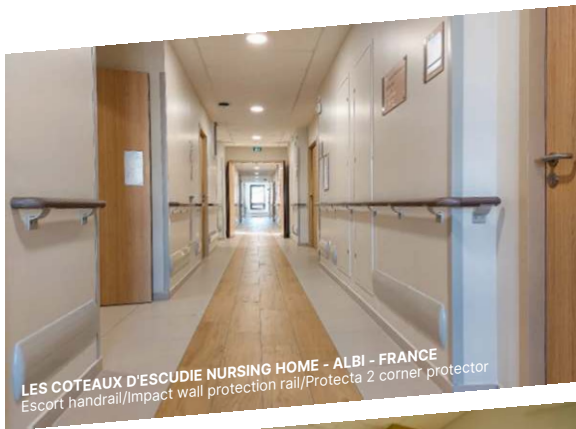

LES COTEAUX D'ESCUDIE NURSING HOME - ALBI - FRANCE  
Escort handrail/Impact wall protection rail/Protecta 2 corner protector



IAC INSTITUT AQUITAIN DU COEUR - FRANCE  
Decowood panels

© Nicolas



IAC INSTITUT AQUITAIN DU COEUR - FRANCE  
Decochoc panels

© Nicolas




SAINTE ANNE HOSPITAL GHU PARIS - FRANCE  
Decochoc panels




SAINTE ANNE HOSPITAL GHU PARIS - FRANCE  
Decochoc panels



© Amit Cocher

EARLY CHILDHOOD - EDUCATION

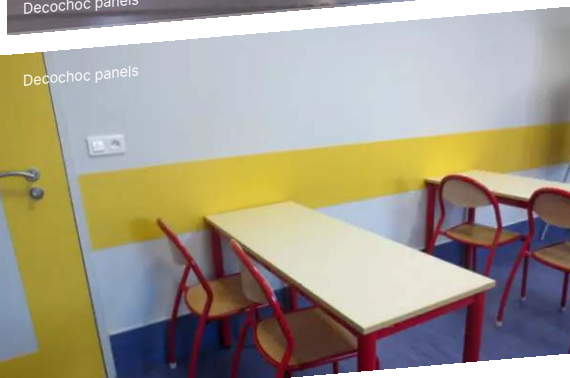

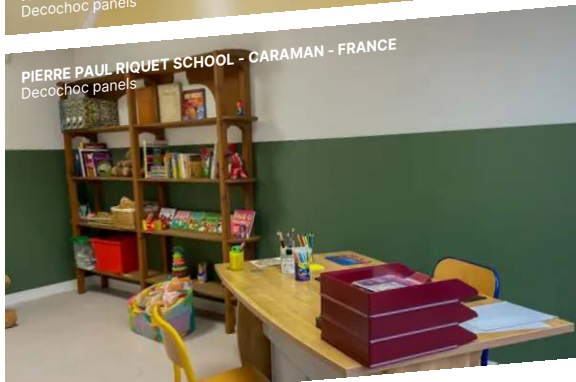


**SPORT FITNESS - OFFICES  
MULTI-FAMILY BUILDINGS**

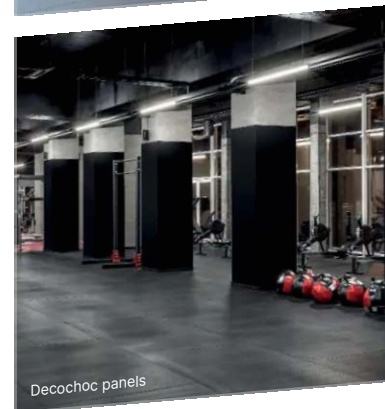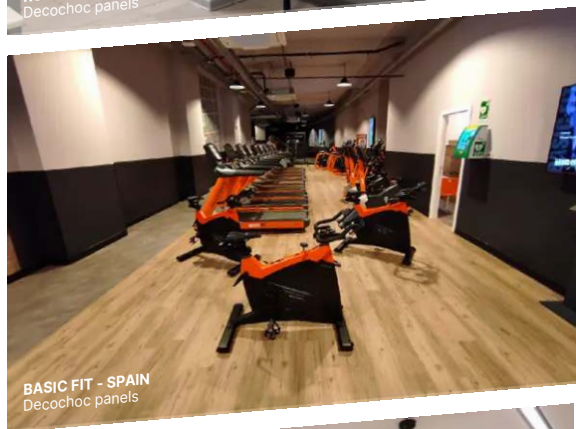



GEEL HOSPITAL - BELGIUM  
Decowood panels


© Heftphotohuis

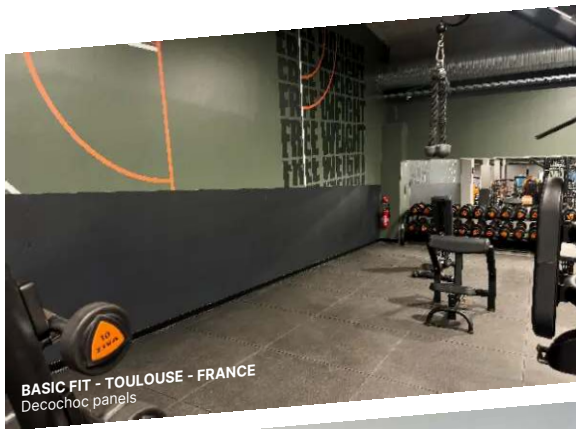


BASIC FIT - TOULOUSE - FRANCE  
Decochoc panels



Decotrend panels

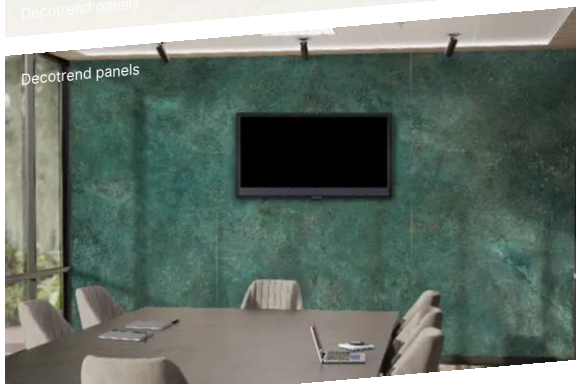

Decotrend panels

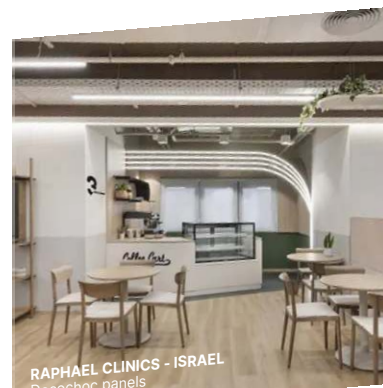


RAPHAEL CLINICS - ISRAEL  
Decochoc panels



Decochoc panels

HOUSING

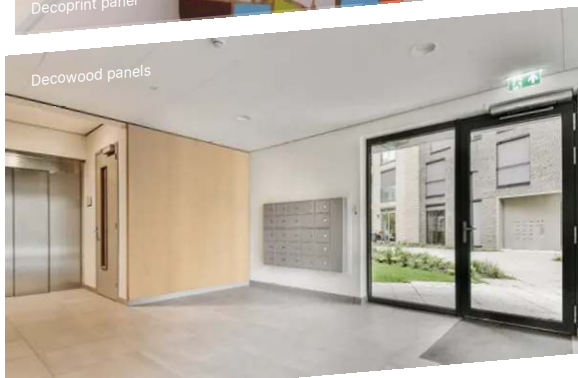




LES MURGÈRES HOUSING  
Decowood panels


© Reproduction



AVEYRON HABITAT - MILLAU - FRANCE  
Decowood panels

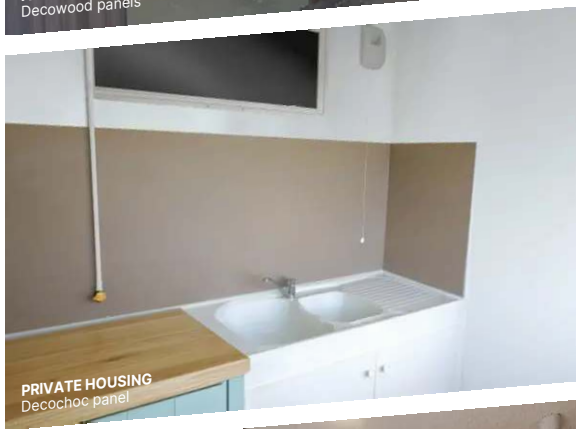

PRIVATE HOUSING  
Decochoc panel

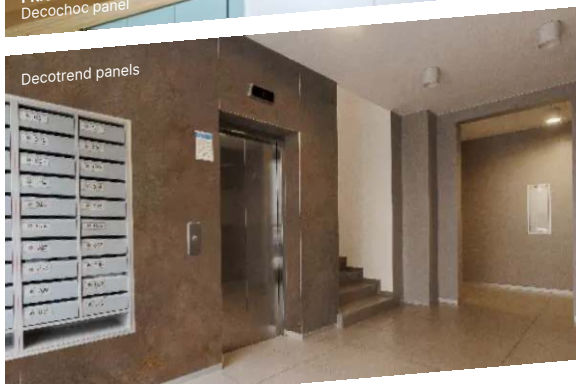

Decotrend panels




Decowood panels/Decosign signage



Decotrend panels

HOTELS - RESTAURANTS

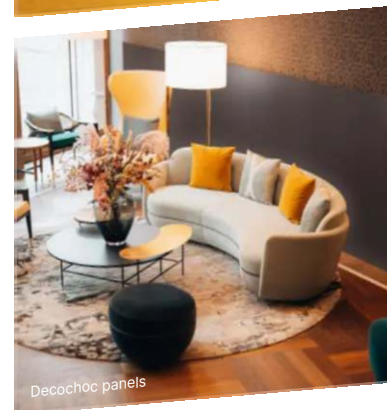




SHOPS



SUPERMARKET EDEKA - GERMANY  
Decoprint panels



Decoprint panels

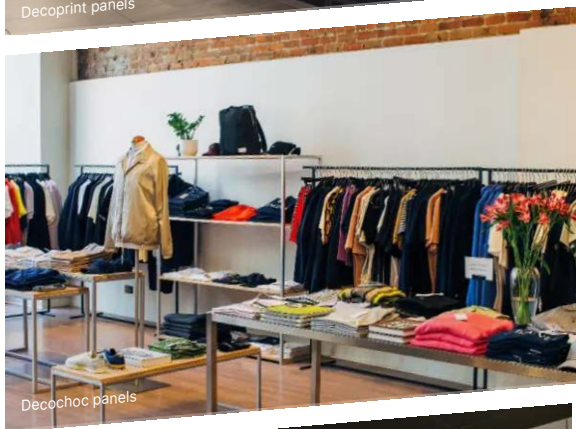


Decochoch panels




CARREFOUR  
Deco panels



MIGROS SUPERMARKETS - SWITZERLAND  
Decoprint panels

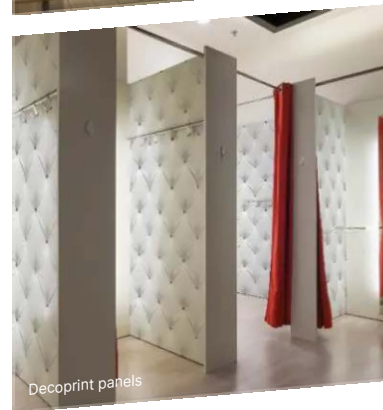

Decoprint panels

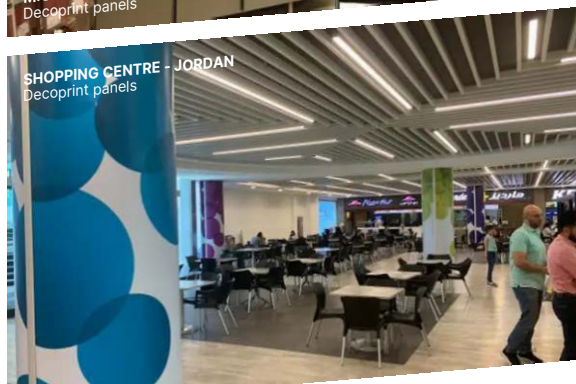

INDUSTRY



OUT OF THE ORDINARY







**Export department**

Tel: + 33 (0)5 34 39 41 00

Email: [export@spm.fr](mailto:export@spm.fr)

**SPM International S.A.S.**

16 rue Isabelle Eberhardt  
CS 92083 - 31019 Toulouse Cedex 2  
France

[spm-international.com](http://spm-international.com)

Follow us



---

PANELS  
HANDRAILS  
WALLPROTECTIONRAILS  
CORNERROTECTORS  
SIGNAGE

---



ECODESIGN



REDUCED CARBON  
FOOTPRINT



SUSTAINABLE  
BUILDING

A company of **Gerflor**

**Spm**<sup>®</sup>  
wall protection