

TARALAY LIBERTEX

LOOSELAY ROLLS - COMMERCIAL APPLICATIONS

gerflor.com



Gerflor[®]
theflooringgroup

ALL TARALAY BENEFITS ... WITH FAST TRACK INSTALLATION

1



Direct installation on existing
or uneven subfloors

At Gerflor, we believe that contract
jobsites will be more and more
under time pressure....

Gerflor has always been **pioneer in
providing adhesive free looselay
solutions**, such as Textile backing rolls,
LVT Clic, GTI, ...

We think these solutions
are the present and future of flooring
because they are faster and cheaper
for installation, great to live in for years
and healthier for the planet.

Made in France, Taralay Libertex is
a new generation of **textile backing roll**,
**specifically developed for
commercial applications.**

It enables installers to save **time and money**
while offering to their customers all the
benefits of Taralay !

2



Not shutdown,
no odor

3



No dry time...
it's done!

4



Great to live in

TARALAY LIBERTEX FASTER & CHEAPER FOR INSTALLATION

MINIMAL SUBFLOOR PREPARATION

-  **TEXTILE BACKING**
absorbs surface irregularities
-  **IDEAL FOR RENOVATION**
-  **DIRECT INSTALLATION**



Renovation on ceramic, joint < 5 mm wide, 1mm deep

FAST AND EASY INSTALLATION

-  **LOOSELAY INSTALLATION: DOUBLE-SIDED ADHESIVE TAPE**
 - On room edges & at seam
 - In corridor, every 10 m
-  **COMPATIBLE WITH ASBESTOS SUPPORT**
-  **NO ADHESIVE**
 - Installation in occupied room
 - Minimum facility downtime
 - Better air quality
 - Easier and cheaper installation
-  **EASIER TO REMOVE AND RECYCLE**

NO SHUTDOWN


-  **NO ODOR, NO ADHESIVE, MINIMUM FACILITY DOWNTIME**

NO DRY TIME

-  **LOOSELAY SOLUTION**

SAVE TIME, SAVE MONEY

SAVE UP TO 30% IN INSTALLATION COST FOR NEW BUILDS & RENOVATIONS

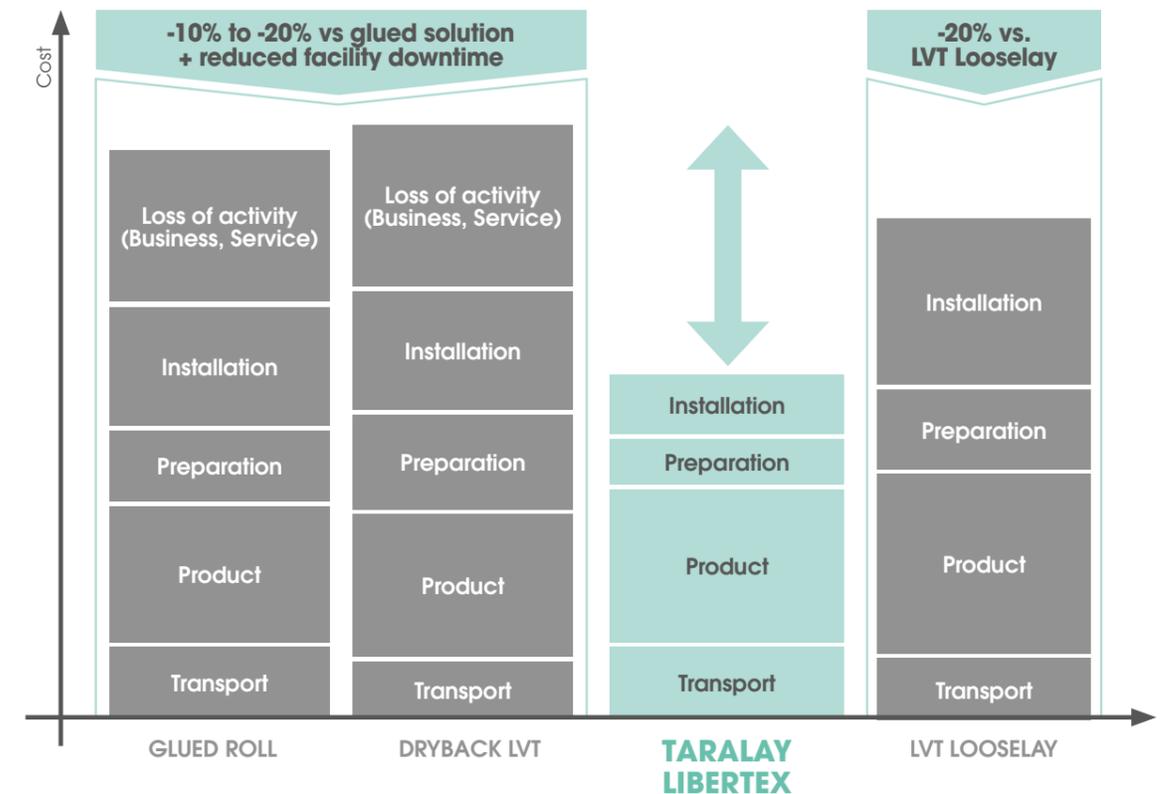

TARALAY LIBERTEX GREAT TO LIVE IN... FOR YEARS & YEARS


MAX 3

INNOVATIVE 3-LAYER SYSTEM

- 1 Compact foam with fiber glass veil
- 2 Acoustic foam
- 3 Recycled polyester reinforced backing



DURABLE & RESISTANT TO HIGH TRAFFIC

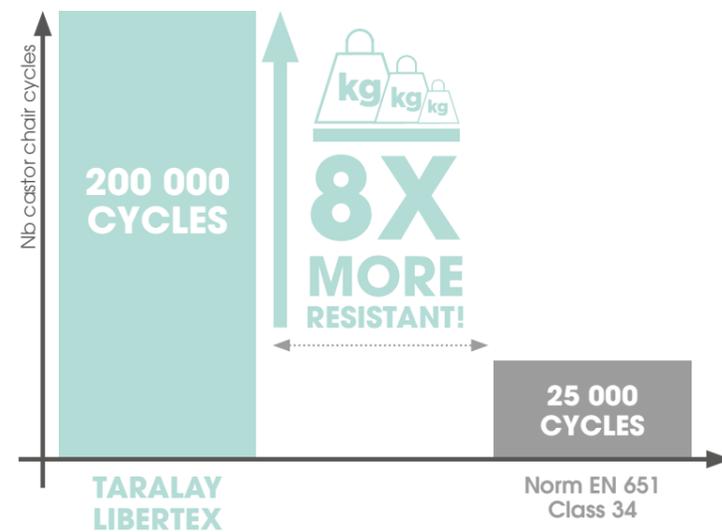

HYGIENIC & EASY TO MAINTAIN



PROTECSOL® SURFACE TREATMENT

ACOUSTIC & COMFORTABLE




IMPACT SOUND INSULATION
Walk noise < 65 dB

19 dB



ROOM IMPACT

<65 dB

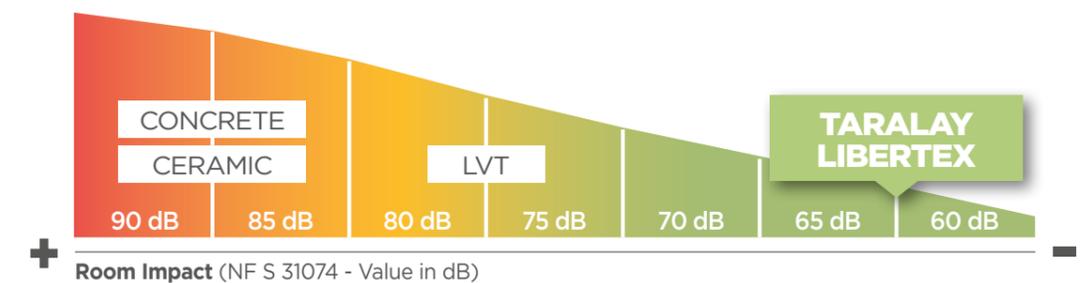

AESTETIC



ULTRA MATT SURFACE



REALISTIC EMBOSS



20 DESIGN COLORS

TARALAY LIBERTEX HEALTHIER LIVING



ECO CONCEPTION

PRODUCE BETTER



- Polyester backing with recycled PET bottles



USE BETTER



- Adhesive free installation
- Durable


RECYCLE BETTER



- 100% Recyclable

INDOOR AIR QUALITY

10 times better than norms requirements (TVOC <100 microgram/m³ after 28 days)
Free of formaldehyde

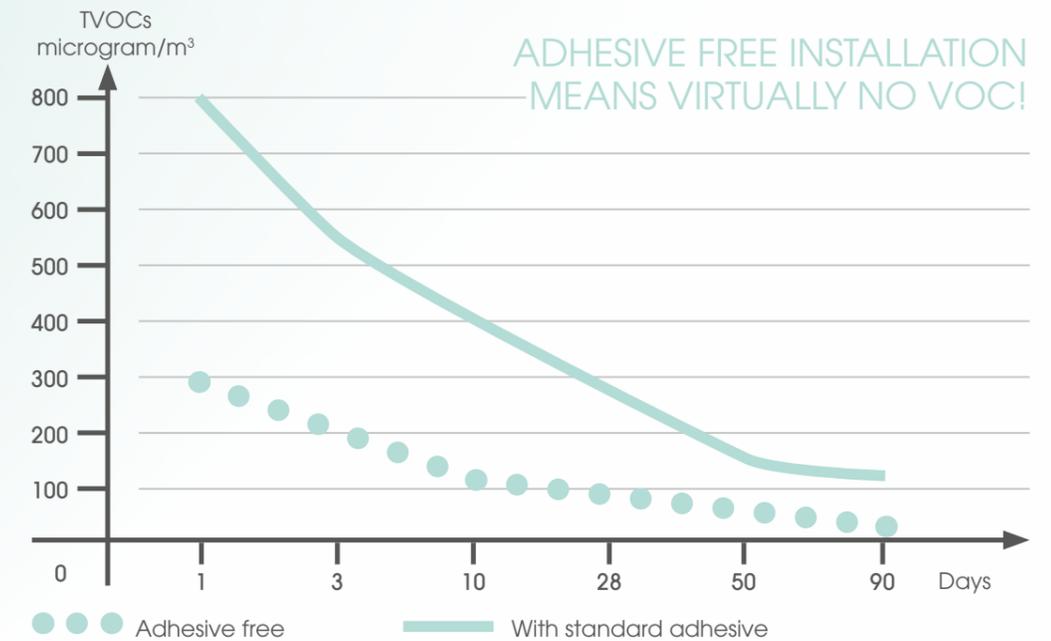

HYGIENIC

TARALAY LIBERTEX is hygienic by design.

- With vinyl rolls, no hassle of cleaning joints, bevels or grout.
- Gerflor Protecso[®] surface treatment makes manual or mechanical maintenance easy and efficient.
- Accessories such as coving or Gerflor Clean Corner system can help further facilitate cleaning procedures.



TARALAY LIBERTEX 20 ULTRA REALISTIC DESIGNS


ULTRA MAT SURFACE



MIX & MATCH



REALISTIC EMBOSS - Mineral, Wood

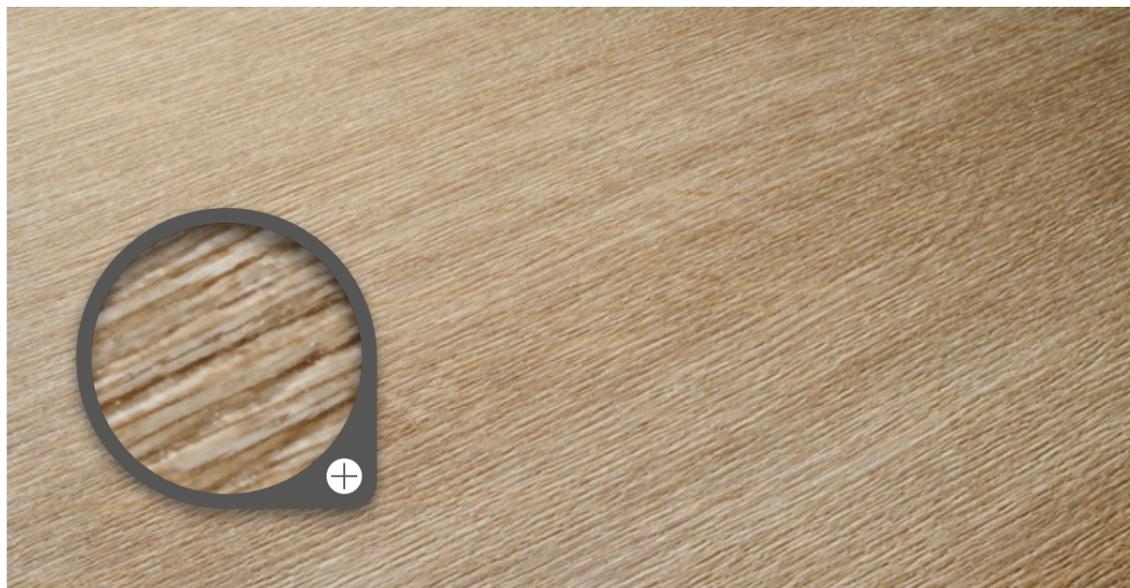

TARALAY LIBERTEX ALL IN ONE SOLUTION



HOT WELDING
for 100% watertight hygienic system
(ref CR40 0585)



COLD WELDING
for invisible joint (see Romus #95605)



WALL TRANSITION

- Vynaflex skirtings, ideal for commercial applications
H 60mm - ref 0483
H 80mm - ref 0482
H100mm - ref 0477
- Coving for 100% watertight hygienic system
- Clean Corner System



ENTRANCE MATS
A new quick & easy installation of entrance mats with Quickmat Tile
(ref 1725)

More info on accessories:
www.gerflor.com

TARALAY LIBERTEX

A SOLUTION FOR EVERY MARKET APPLICATION




AMSTERDAM



2151 - Amsterdam Light Grey

NCS: S-2500N / LRV: 39

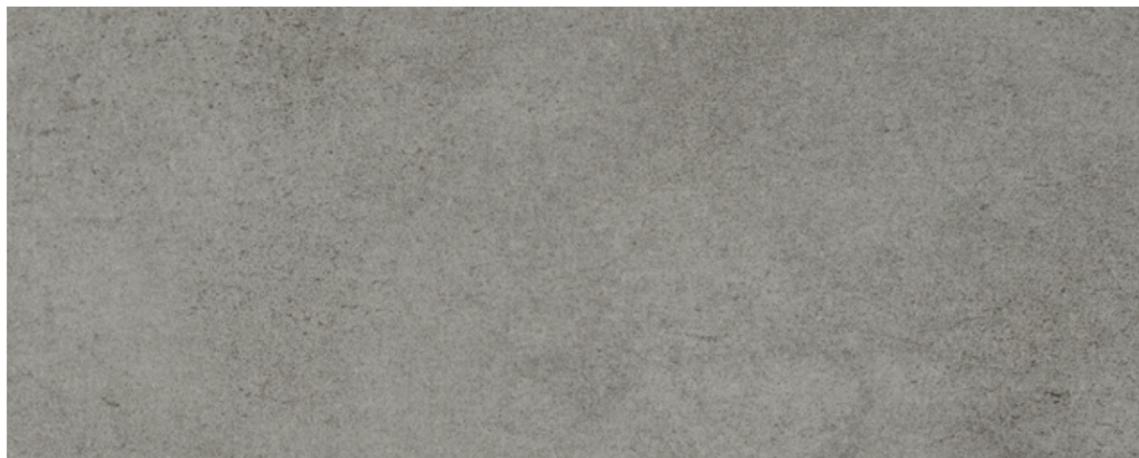

2152 - Amsterdam Grey

NCS: S4502-Y / LRV: 26



2153 - Amsterdam Anthracite

NCS: S6502-Y / LRV: 12



COCOON



2241 - Cocoon Silver Brown
NCS: 4502-R / LRV: 34



HOSSEGOR



2247 - Hossegor Latte
NCS: 3005-Y80R / LRV: 38



LEGEND



Pas de lame
Pas de raccord

2243 - Legend Chestnut

NCS: S3010-Y30R / LRV: 31



Pas de lame
Pas de raccord

2242 - Legend Country

NCS: S4020-Y20R / LRV: 26



Pas de lame
Pas de raccord

1430 - Legend Grey

NCS: S5502-R / LRV: 18



PAROS



2248 - Paros Clear
NCS: S2502-Y / LRV: 43



2248 - PAROS CLEAR

PURE OAK



16x100 cm

0720 - Pure Oak Clear
NCS: S2010-Y40R / LRV: 31




16x100 cm

1751 - Pure Oak Grey
NCS: S3500N / LRV: 20




REFLECT

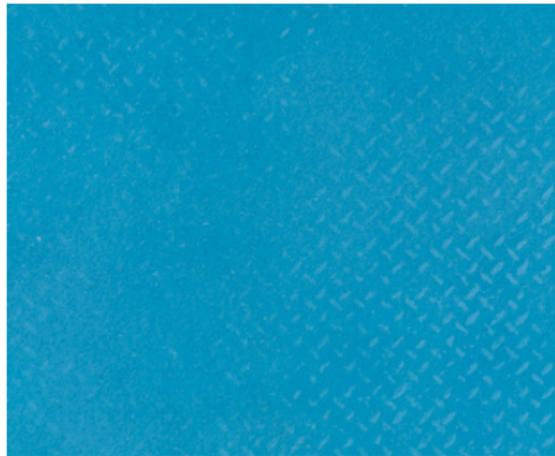


2249 - Reflect Sea NCS: 3040-R90B / LRV: 24



2250 - Reflect Forest NCS: 1050-G30Y / LRV: 43

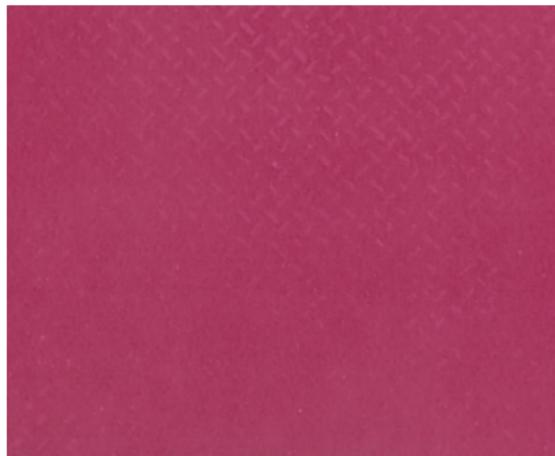

2252 - Reflect Flower NCS: 3040-R20B / LRV: 18

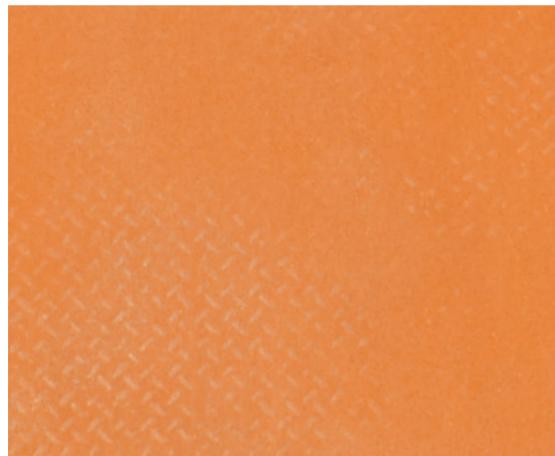

2251 - Reflect Sunny NCS: 2040-Y70R / LRV: 28



1785 - Reflect Earth 4010-R10B / LRV: 32



2253 - Reflect Silver NCS: 4005-R20B / LRV: 31



SKANDI OAK



20x133,3 cm

2246 - Skandi Oak Toffee

NCS: S4010-Y50R / LRV: 25



20x133,3 cm

2245 - Skandi Oak Natural

NCS: S3010-Y40R / LRV: 28



20x133,3 cm

2244 - Skandi Oak Clear

NCS: S2005-Y50R / LRV: 43



TARALAY LIBERTEX

TARALAY LIBERTEX is ideal for fast track installation or renovations in commercial buildings.

It is a multi-layered vinyl floorcovering with a printed design protected by a 0,70 mm thick transparent wear layer. The product features a high density foam complexed with fiber glass, an acoustic foam layer and a reinforced textile backing. It offers **19 dB sound insulation**. It is available in 2m and 4m wide sheet, offers a R10 slip resistance and a group T wear rating. It is mechanically embossed, benefits from ProtecSol® surface treatment and has an ultra matt look.

TARALAY LIBERTEX is a worry-free looselay solution. It is laid without glue, simply applying a double-sided tape such as Fix&Free on room edge and at the joint. Its textile backing absorbs surface irregularities requiring minimal subfloor preparation on uneven floors. It is compatible with cold welding, hot welding, coving, and Vynaflex skirtings.

It includes at least 30% mineral materials and 20% renewable materials. Textile backing is made at 95% from recycled PET bottles. It is 100% recyclable and 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000) are below 100 microgram / m³. It is classified A + (the best class) for indoor air quality.

TARALAY LIBERTEX

DESCRIPTION

Total thickness	EN ISO 24346	mm	3.65
Wearlayer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m ²	2900
Width of sheet	EN ISO 24341	cm	200 / 400
Length of sheet	EN ISO 24341	lm	20

CLASSIFICATION

Norm/product specification	-	-	EN 651
European classification	EN ISO 10874	class	34
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	-	R10

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	ProtecSol®
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
Certification	-	-	Floorscore®

CE MARKING

CE	EN 14041				
----	----------	---	---	---	---

⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.



GERFLOR INTERNATIONAL

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

Be connected!



www.gerflor.com

#Gerflor

TARALAY LIBERTEX: AN ECO-RESPONSIBLE CHOICE



COMPOSITION
100% REACH



RECYCLED CONTENT
Backing made with recycled PET



RECYCLABILITY
100%



INDOOR AIR QUALITY
10 times better than norms requirements (TVOC <100 microgram/m³ after 28 days)
Free of formaldehyde



INSTALLATION
No adhesive



WELLNESS
• COMFORT
Impact noise reduction: -19dB
• SECURITY
Anti slip performance R10