



POWERSHOCK
RUBBER SOLUTIONS FOR FITNESS


Gerflor[®]
theflooringroup

POWERSHOCK 80


CARDIO & FREE-WEIGHT ZONE

Durability and resistance to impacts:


- ✓ Easy to clean and maintain thanks to its vulcanised, non-porous wear layer
- ✓ Highly durable
- ✓ Highly resistant to static loads and light weights: suitable for the use of kettlebells up to 25kg, dropped from a 1m height
- ✓ Non-glued, easy to install interlocking tiles



DARK GREY



BLACK

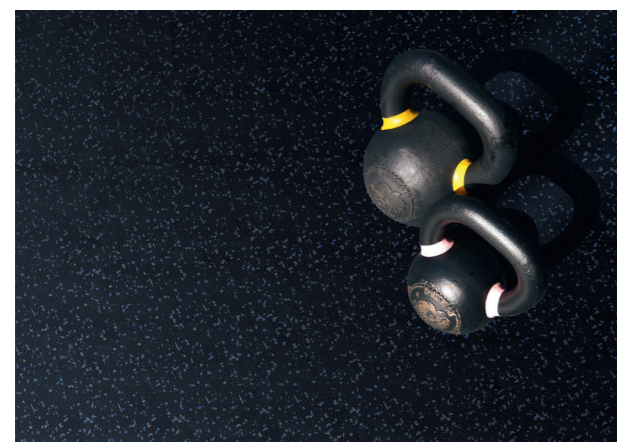


ACCESSORIES

(available from Romus)





Aluminium reducer
Unit: 3lm



Multilevel coverstrip
Unit: 2,7lm

8mm
INTERLOCKING TILES WITH
DOVETAIL EDGES

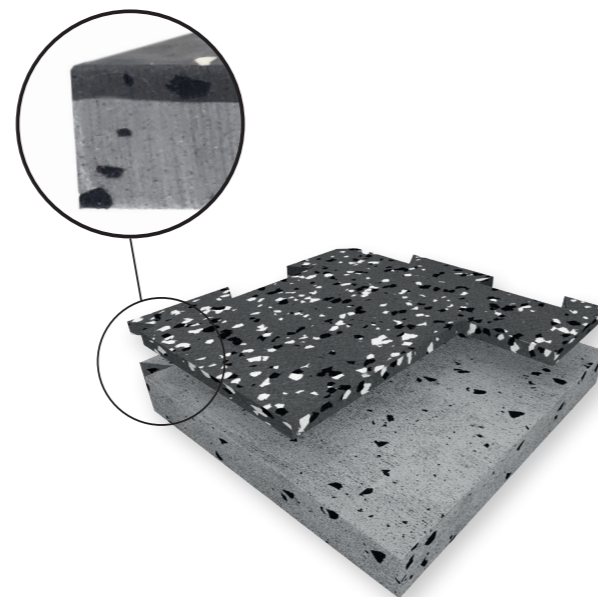


POWERSHOCK 300



CROSSFIT & HEAVY-WEIGHT AREA

Outstanding protection of floor and fitness equipment:

- ✓ High shock absorption and sound insulation
- ✓ Great protection of the subfloor: withstands weights up to 200kg dropped from a 2m height
- ✓ Non-glued, easy to install tiles with connector pins



30mm
TILES WITH PRE-INSTALLED
CONNECTOR PINS

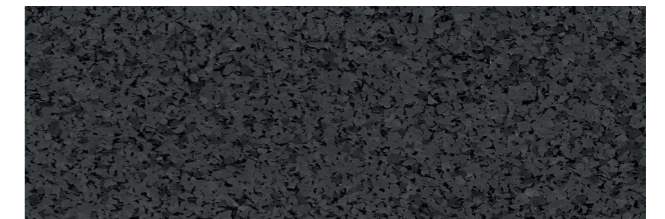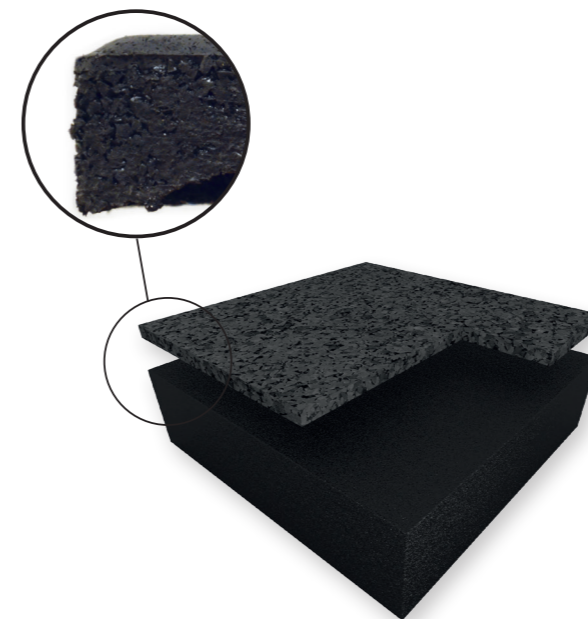


DARK GREY




ACCESSORIES

(available from Romus)



Ramp edge rubber - 30mm
1lm



Corner ramp edge rubber - 30mm
2 units (1000 x 250mm)



POWERSHOCK	
80	300
CARDIO & FREE-WEIGHT AREA	CROSSFIT & HEAVY-WEIGHT AREA

DESCRIPTION

Thickness	NF EN ISO 24346	mm	8	30 (± 2)
Weight	NF EN ISO 23997	kg/tile	11.9	6.8 (± 0.2)
Size	NF EN ISO 24342	mm	980 x 980 (incl. dovetails)	500 x 500 (± 0.8%)

CLASSIFICATION

Fire resistance	EN 13501-1	class	B _{fl,s1}	C _{fl,s1}
VOC	ISO 16000-6	class	A+	A+

PERFORMANCE

Dimensional stability	NF EN ISO 23999	%	< 0.3	< 0.1
Abrasion	EN ISO 5470-1	g	< 0.5	1.5
Light resistance	EN ISO 20105 - B02	level	4	3
Indentation resistance	EN 1516	mm	<0.1	0.12
Slip resistance in dry condition	EN 13036-4	unit	80-110	80-110
Sound insulation	EN ISO 717/2	dB	13	24
Hardness shore A	Int.	-	> 75	60

WE CARE | WE ACT. Our commitments for a sustainable future

<p>CARBON FOOTPRINT*</p> <p>-20 % kg CO₂ equivalent/m² between 2020 and 2025</p>	<p>BIOSOURCED CONTENT**</p> <p>10 % by 2025</p>	<p>RECYCLED CONTENT</p> <p>30 % by 2025</p>	<p>ADHESIVE FREE***</p> <p>35 % by 2025</p>	<p>ANNUAL VOLUME RECYCLED</p> <p>60,000 t by 2025</p>
---	--	--	--	--

* Scopes 1 & 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity with adhesive free solutions

Gerflor

Be connected!



www.gerflor.com

#Gerflor

FRANCE:

Gerflor - Service Express:

☎ N°Azur 0 810 569 569 ☎ N°Azur FAX 0 810 569 570

e-mail: contactfrance@gerflor.com

OTHER COUNTRIES:

Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

Gerflor
theflooringgroup