



## HALF-HEIGHT DOOR



### ▶ DECOCHOC / DECOSMIC PROTECTION AND COVERING PANELS - STRAIGHT CUT -

**Recommended protection height: from 800 mm to 1300 mm.**

#### Applications



Protects and decorates doors in corridors and entrances to hospitals, clinics, retirement homes, schools, kitchens, restaurants, collective housing...  
To avoid the handle and lock and facilitate installation, we recommend a protection height below either 900 mm or 1100 mm.

#### Description

- Model: Cut-to-size Decochoc or Decosmic protection and covering panel
- Standard panel dimensions: 3 m x 1,30 m
- Custom options: Bendings, thermoformings, chamfers
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Lightly textured
- Fixing: Adhesive bonding with Gerflor acrylic glue or Gerflor universal mastic glue
- Colours: 32 standard for Decochoc and 3 for Decosmic.

#### Specification

- Description: Protection and covering panel (Decochoc or Decosmic as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colours. Surface is lightly textured, 2 mm thick. A protective film is specified to minimise cleaning before acceptance.
- Environment: No heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/PBA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is under 15µg/m<sup>3</sup>. 100% of the product are recyclable.
- Colour: Selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.

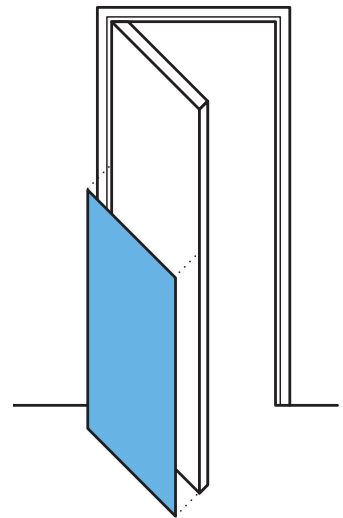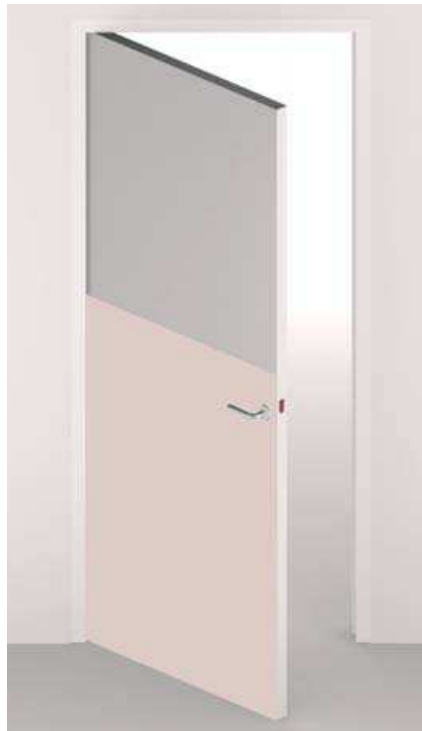

Specification can be downloaded from our website [www.gerflor.com](http://www.gerflor.com)

Door protection

### ▶ PLAC'INOX STAINLESS STEEL PROTECTION PLATE

Please refer to page 53.