

TARALAY LIBERTEX

LOOSELAY ROLLS - COMMERCIAL APPLICATIONS

gerflor.com



Gerflor[®]
theflooringgroup


TARALAY LIBERTEX

FAST INSTALLATION IN ONE SOLUTION!



ADHESIVE FREE

Apply double-sided tape (such as Fix&Free 100 - Ref. 058U) on welding area and on room edges



HOT WELDING

for 100% watertight hygienic system (Ref. CR40 0585)



COLD WELDING

for invisible joint (Ref. E8270001 or see Romus Ref. 95605)



WALL TRANSITION

- Vynaflex skirtings, ideal for commercial applications (H 60 mm - Ref. 0483 / H 80 mm - Ref. 0482 / H 100 mm - Ref. 0477)
- Coving for 100% watertight hygienic system



ENTRANCE MATS

A new quick & easy installation of entrance mats with Quickmat Tile (Ref. 1725)

More information on gerflor.com

ALL TARALAY BENEFITS ...

HYGIENIC & EASY MAINTENANCE



PROTECSOL®
SURFACE
TREATMENT

HIGH TRAFFIC RESISTANCE



34


0,7 mm
WEARLAYER

COMFORT



19 dB

MAX³
LAYER SYSTEM

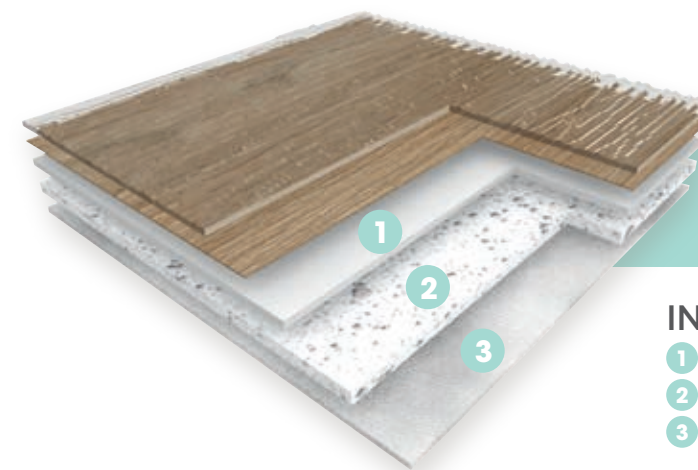

MAX³

INNOVATIVE 3-LAYER SYSTEM

- 1 High density foam complexed with fiber glass
- 2 Acoustic foam layer
- 3 Reinforced textile backing

... WITH FAST TRACK INSTALLATION

MINIMAL SUBFLOOR PREPARATION



INSTALLATION ON
EXISTING OR UNEVEN
SUBFLOORS

NO SHUTDOWN



NO ODOR, NO GLUE,
MINIMUM FACILITY
DOWNTIME

NO DRY TIME



LOOSELAY
SOLUTION



UNEVEN SUBFLOORS

COMPACT FLOORS

ASBESTOS

TILES



YOUR SUSTAINABLE FLOORING SOLUTION!


CIRCULAR ECONOMY

- 100% RECYCLABLE PRODUCT
- RECYCLED CONTENT:
backing made with up to 95% recycled PET from plastic bottles



INDOOR AIR QUALITY

ADHESIVE FREE INSTALLATION MEANS VIRTUALLY NO VOC!

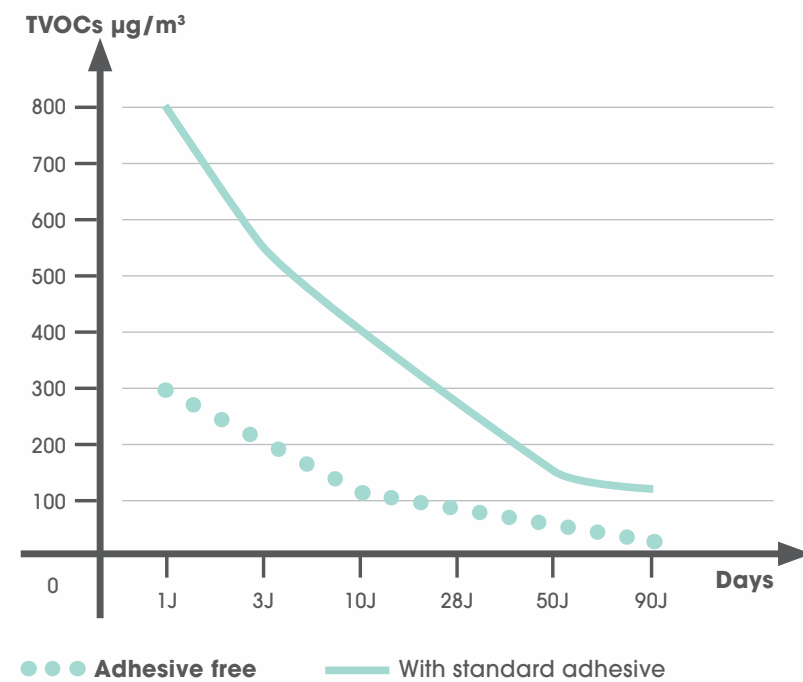

2243 - LEGEND Chestnut
NCS: S3010-Y30R / LRV: 31



2245 - SKANDI OAK Natural
NCS: S3010-Y40R / LRV: 28



0720 - PURE OAK Clear
NCS: S2010-Y40R / LRV: 31



2242 - LEGEND Country
NCS: S4020-Y20R / LRV: 26



2246 - SKANDI OAK Toffee
NCS: S4010-Y50R / LRV: 25





20x133.3 cm

2244 - SKANDI OAK Clear
NCS: S2005-Y50R / LRV: 43



10x100-67-33.3 cm

2247 - HOSSEGOR Latte
NCS: 3005-Y80R / LRV: 38



1785 - REFLECT Earth
NCS: 4010-R10B / LRV: 32



No plank Continuous design

1430 - LEGEND Grey
NCS: S5502-R / LRV: 18



No plank Continuous design

2241 - COCOON Silver Brown
NCS: 4502-R / LRV: 34



16x100 cm


1751 - PURE OAK Grey
NCS: S3500N / LRV: 20



2245 - SKANDI OAK NATURAL



1751 - PURE OAK GREY

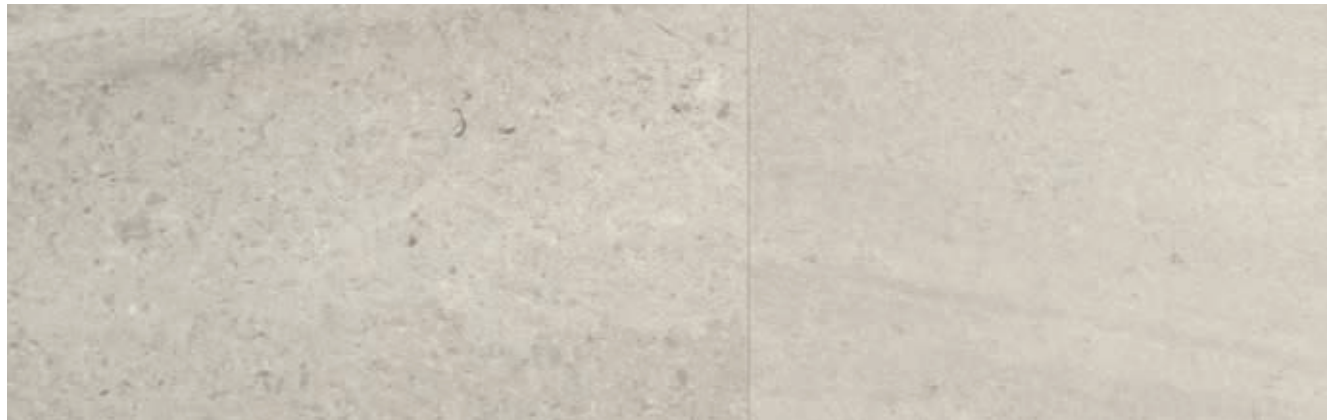

33.3x66.6 cm

2248 - PAROS Clear
NCS: S2502-Y / LRV: 43



2250 - REFLECT Forest
NCS: 1050-G30Y / LRV: 43



2253 - REFLECT Silver
NCS: 4005-R20B / LRV: 31



2153 - AMSTERDAM Anthracite
NCS: S6502-Y / LRV: 12



2151 - AMSTERDAM Light Grey




2249 - REFLECT Sea
NCS: 3040-R90B / LRV: 24



2253 - REFLECT SILVER / 2252 - REFLECT FLOWER




2152 - AMSTERDAM Grey
NCS: S4502-Y / LRV: 26

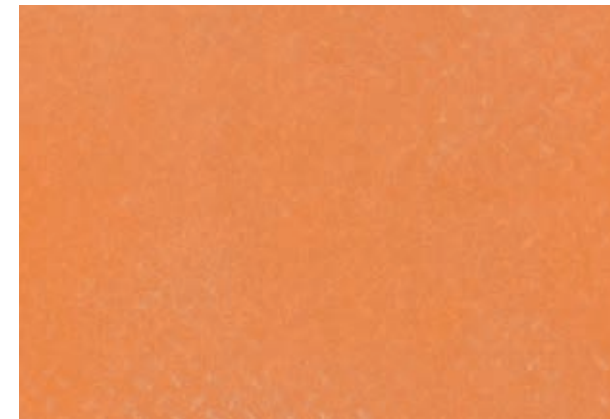

2251 - REFLECT Sunny
NCS: 2040-Y70R / LRV: 28



2151 - AMSTERDAM Light Grey
NCS: S-2500N / LRV: 39

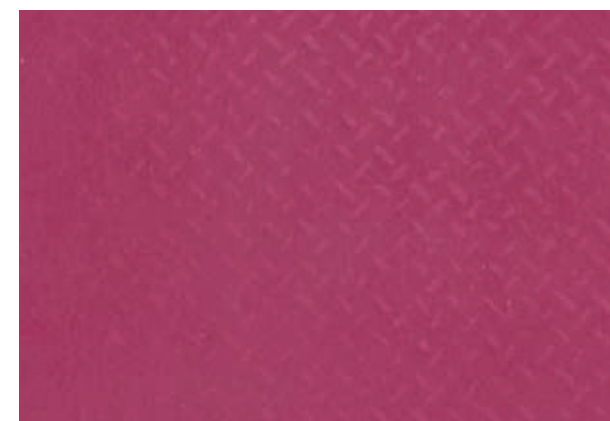

2252 - REFLECT Flower
NCS: 3040-R20B / LRV: 18



TARALAY LIBERTEX

DESCRIPTION

Total thickness	EN ISO 24346	mm	3.65
Wearlayer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2900
Width of sheet	EN ISO 24341	cm	200 / 400
Length of sheet	EN ISO 24341	lm	20

CLASSIFICATION

Norm/product specification	-	-	EN 651
European classification	EN ISO 10874	class	34
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	class	R10






PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Castor chair test (type W)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protocolsol®
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
Certification	-	-	Floorscore®

CE MARKING

	EN 14041	   
--	----------	---

⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

We care / We act Our Commitments for a Sustainable future

 CARBON FOOTPRINT* -20 % kg CO ₂ equivalent/m ² between 2020 and 2025	 BIOSOURCED CONTENT*** 10 % by 2025	 RECYCLED CONTENT 30 % by 2025	 ADHESIVE FREE** 35 % by 2025	 ANNUAL VOLUME RECYCLED 60 000 t by 2025
---	---	--	---	--



* Scopes 1 and 2 defined in the GHG protocol *** % of activity with biosourced materials ** % of activity - adhesive free solution