







MIPOLAM BIOCONTROL PERFORMANCE


 ISO 3 |
 
 GMP-Class A |
 
 ✓ H₂O₂ |
 
 |
 
 100% recyclable




Non-directional, tone-on-tone homogeneous sheet vinyl flooring available in 16 colors, engineered for cleanrooms [ISO 3], with a 100% Bio-Based plasticizer.


- ▶ High performance homogeneous sheet vinyl flooring for clean room applications
- ▶ Fraunhofer Institute tested and certified for clean room applications
- ▶ ISO Clean room level 3 classification
- ▶ GMP-Class A cleanability
- ▶ Highly resistant to decontamination and staining
- ▶ Engineered for heavy traffic resistance
- ▶ Easy to maintain, NO WAX for Life
- ▶ ISO 22196 certified to inhibit the spread of bacteria
- ▶ 100% Bio-Based plasticizer

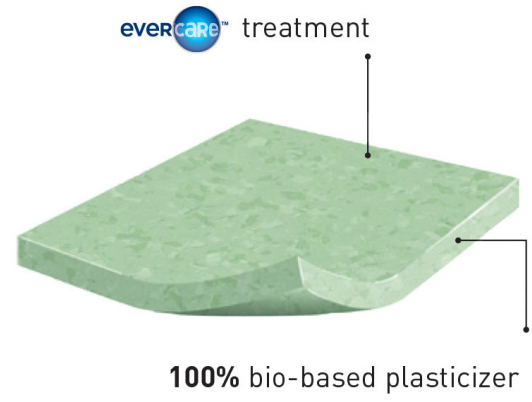

MIPOLAMBIOCONTROL PERFORMANCE

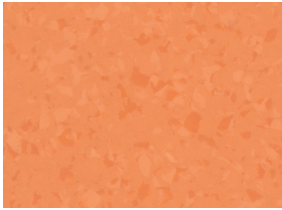


6035 SUNSET

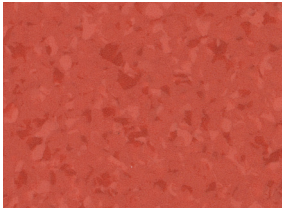


6055 TOMATO




6027 ACCACIA

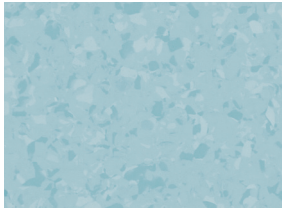


6006 BLUE SKY

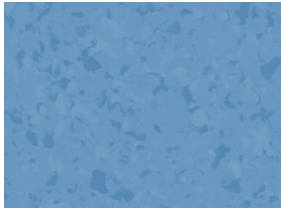

6016 SEA BLUE

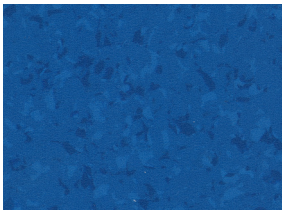


6046 BLUE NIGHT

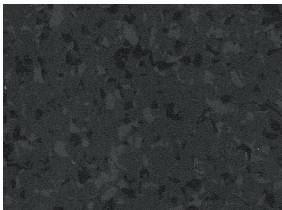


6059 BLACK DIAMOND




6075 CARDINAL

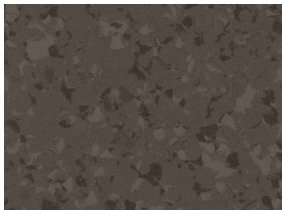

6045 CHOCOLATE

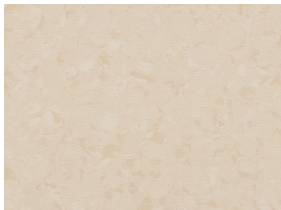


6005 GHIBLI

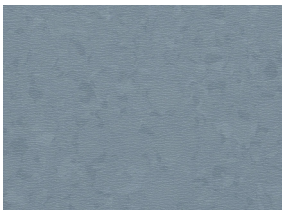

6050 HURRICANE



6067 KAKI

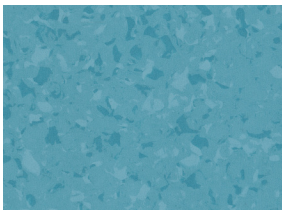


6037 LAGOON




6034 MOLE




6057 MUSK

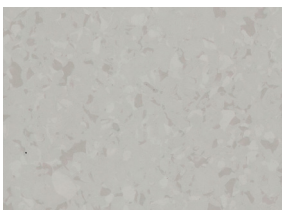


6010 MYST

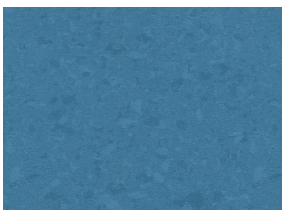


6036 OCEANIA

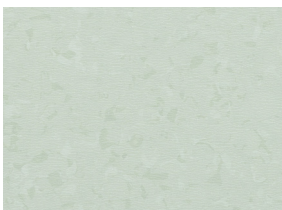

6047 SAUGE

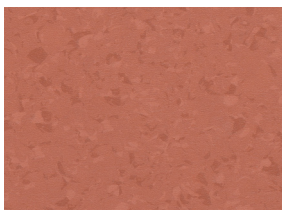

6065 SEGESTA

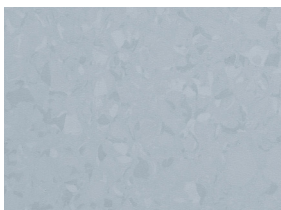


6030 STONEHENGE




6025 TANGELO



6056 TULUM

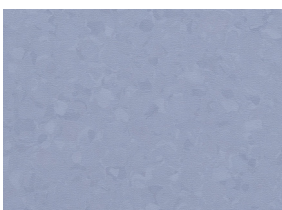

6018 USHUAIA

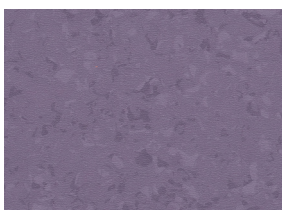

6058 VERMIGLIO

MIPOLAMBIOCONTROL PERFORMANCE



DESCRIPTION	STANDARDS	REQUIREMENTS	MIPOLAM BIOCONTROL
PRODUCT DESCRIPTION			
Reference Specification	ASTM F1913-04	-	Exceeds
Construction	-	-	Homogeneous sheet vinyl flooring
Patterns	-	-	Tone-on-tone, non-directional design
Colors	-	-	16
Surface Treatment / Maintenance	-	-	Evercare / No Wax for Life
Guage Total Thickness	ASTM F386	> 0.075"	0.08" (2.0 mm)
Wearlayer Thickness	ASTM F410	-	0.08" (2.0 mm)
Roll Width	-	-	6' 6" (2 m)
Roll Length	-	-	66' (20 m)
Coverage / Roll	-	-	430.56 ft ² (40 m ²)
Weight	-	-	0.53 lb/ft ² (2600 g/m ²)
PERFORMANCE			
Static Load (250 Psi)	ASTM F970	≤ -0.005"	-0.002" (0.05mm) (Exceeds)
Maximum Static Load Limit	-	-	Up to 2000 lb/in ²
Chemical & Stain Resistance	ASTM F925	-	Excellent (results upon request)
Particulate Emission (Fraunhofer Method)	ISO 14644-1	-	ISO 3
Cleanability Class (Fraunhofer Method)	ISO 14644-9	Classification	Class 100
Micro-Organism Adhesion (Fraunhofer Method)	ISO 14698-1/GMP	Classification	A
Action Of Mirco-Organisms On The Flooring	ISO 846	Classification	Inert & Resistant
Development Of Micro-Organisms On The Flooring	ISO 14698-1/GMP	Classification	Fungistatic & Bacteriostatic
Fire Rating	ASTM E648	Class	Class 1
ENVIRONMENT HEALTH & SAFETY			
End of Life	-	-	100% Recyclable
Production Waste	MRC3 LEED v4	-	100% Manufacturing Waste Recycled
Allergen-Free	-	-	100% Allergen-Free
Plant Certifications	-	-	ISO 14001 , ISO 9001
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			
Sourcing of Raw Materials: Recycled Content	MR 4 LEED v3	-	25%
	Sourcing LEED v4		
Restriction Use of Harmful Chemicals	MRC4 LEED v4	-	100% REACH Compliant
Health Product Declaration (HPD)	Materials LEED v4	-	Self Declared
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)			
Indoor Air Quality / Low Emitting Materials	IEQ 4.3 LEED v3	-	FloorScore Certified
	IEQ Option 1 LEED v4		
TVOC after 28 days	ISO 16000-6	-	< 10 ug/m3
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions.		

*The implementation of an effective cleaning method is the best defence against infection.