

Mural Club




B-s2,d0

PUR



100% recyclable

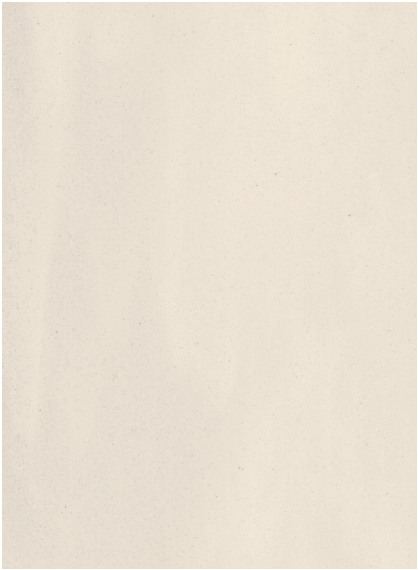


0003 Sand



0006 Grey




0001 White

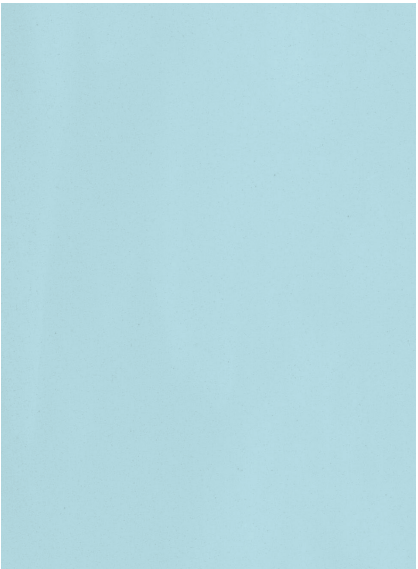

0007 Blue



0004 Green

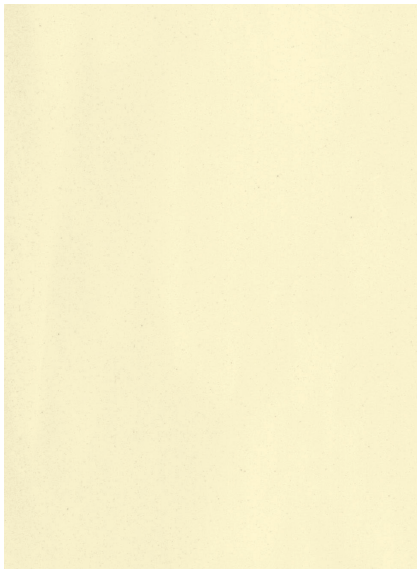

0005 Yellow



Technical performances

- Resistance to tearing
- Fire classification according to EN 13501: **B-s2,d0**



Installation

- Horizontal or vertical installation (2 m width)
- Coloured backing for a perfect welding aspect
- A complete range of accessories for a durable and easy installation



Aesthetics

- Slightly marbled design in 6 soft colours
- Colours matching the Gerflor ranges especially the Mipolam ranges



Hygiene

- Smooth and washable surface
- No particle emission
- Reduces hospital acquired infections compliant with ISO 22196, inhibits growth of bacteria
- Good resistance to staining thanks to **PUR surface treatment**



Eco-friendly

- 100% recyclable
- Contains recycled production wastes
- Raw materials 100% compliant with Reach
- Made in Europe

Mural Club

Description / Beschreibung / Description / Beschrijving / Descripción / Descrição / Descrizione

Total thickness / <i>Gesamtdicke</i> / Épaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essessura total</i> / Spessore totale	EN ISO 24346	mm	1.0
Thickness of wearlayer / <i>Dicke Nutzschicht</i> / Épaisseur couche d'usure / <i>Dikte van de slijtlaag</i> / Espesor capa de uso / <i>Espessura camada de desgaste</i> / Spessore strato di usura	EN ISO 24340	mm	1.0
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN ISO 23997	g/m ²	1780
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teili	EN ISO 24341	cm / ml	200 / 30

Classification / Klassifizierung / Classification / Classificatie / Clasificaciones / Classificações / Classificazioni

Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 259-1
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13 501-1	class	B-s2,d0

Performances / Technische Eigenschaften / Performances / Testresultaat / Cualidades Técnicas / Performances / Caratteristiche Tecniche

Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 - B02	degree	≥ 6
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN ISO 26987	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) / <i>Antibakterielle Aktivität (E. coli - S. aureus - MRSA)</i> / Activité anti-bactérienne (E. coli - S. aureus - MRSA) / <i>Antibacteriële activiteiten (E. coli - S. aureus - MRSA)</i> / Actividad antibacteriana (E. coli - S. aureus - MRSA) / <i>Atividade antibacteriana (E. coli - S. aureus - MRSA)</i> / Azione antibatterica (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth / > 99% <i>Wachstumshemmend</i> / > 99 % ne favorise pas la prolifération / > 99% <i>remt de groei van bacteriën</i> / > 99% inhibe el crecimiento / > 99% <i>inibe o desenvolvimento</i> / > 99% inibisce la crescita

CE MARKING / CE KENNZEICHNUNG / MARQUAGE CE / EG-CONFORMITEITSMERK / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA



EN 15 102 - - - OK

(1) The implementation of an effective cleaning method is the best defence against infection

we care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg

CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT***
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE**
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025

* Scopes 1 and 2 defined in the GHG protocol *** % of activity with biosourced materials ** % of activity - adhesive free solution