

MURAL PLUS 康洁加强



gerflor.com
gerflor.cn




Gerflor[®]
theflooringroup

MURAL PLUS 康洁加强



100% recyclable

MURAL PLUS 康洁加强

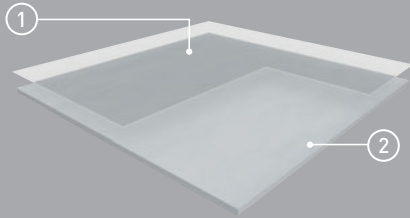

① PUR Protect special maintenance treatment
PUR Protect 特殊维护处理

② Densely compacted surface
加强型致密结构

- Easily seam welded to produce continuous surfaces
易于焊接以形成连续表面
- Creates a safe and hygienic environment
创建一个安全和清洁的环境
- Flexible and easy to cover
柔软并易于转角面的覆盖
- Ideal for walls and ceilings
适合于墙面和天花板
- Recyclable and environmentally friendly
可回收, 对环境有益




Compact sheet, without foam backing
致密卷材, 无泡沫背层



3001


MURAL PLUS 康洁加强




3001




3008




3011



3004




3005



3010



3006



3009



MURAL PLUS is a homogeneous flexible vinyl sheet developed from a vinyl floorcovering . It is designed to be permanent wall covering. Fully resistance to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. It benefits from PUR Protect special maintenance treatment with excellent cleaning characteristics, improved resistance to scratching.

MURAL PLUS is fully impact resistant and is therefore ideal for use as a cladding in large public building such as hospitals, care institutions dental and veterinary surgeries, cleaning rooms etc.

康洁加强墙布 是一种透心柔性PVC卷材。该墙布为永久性墙布，可完全抵抗冲击力的破坏，它可作为一种缓冲性胶垫来防止床，推车以及其它室内机动车辆或运输工具对墙面的破坏。该产品经过PUR Protect特殊维护处理，提升了抗刮痕性，非常易于养护。

康洁加强墙布的抗压性使它可以用作大型建筑物的保护层，适用于医院，护理中心，牙科，手术室，洁净室，超级市场和仓库等。

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料放置在18-24°C室温内适应环境。所有接缝应选用Gerflor®之配套焊条热焊处理。

MAINTENANCE 维护

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

铺装之后终生无需打蜡。定期进行维护以使其保持外观整洁和耐用。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

MURAL PLUS 康洁加强

DESCRIPTION 规格

Total thickness 总厚度	ISO 24346 (EN 428)	mm	1
Weight 重量	ISO 23997 (EN 430)	g/m ²	1750
Width of sheet 卷宽	ISO 24341 (EN 426)	cm	200
Length of sheet 卷长	ISO 24341 (EN 426)	lm	30

CLASSIFICATION 类别

Fire rating 防火等级	GB 8624-2012	-	B ₁ (B-s2, d0, t0)
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格

PERFORMANCE 性能

Dimensional stability 尺寸稳定性	ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation 残余凹陷度	ISO 24343-1 (EN 433)	mm	≤0.10
Colour fastness 色牢度	ISO 105 - B02	degree	≥ 6
Chemical products resistance 抗化学性	ISO 26987 (EN 423)	-	OK
Special maintenance treatment 特殊维护处理	-	-	PUR Protect
Color number 颜色数量	-	-	8

1) The implementation of an effective cleaning regime is the most important defence against infections.
实施有效的清洁方法是抗感染最重要的防御措施。



随时找到 Gerflor®



请微信扫码，
关注Gerflor®

Gerflor 洁弗乐™
theflooringroup

GERFLOR CHINA

SHANGHAI BRANCH 上海分公司 Tel. / 电话: +86-21-63578818
BEIJING BRANCH 北京分公司 Tel. / 电话: +86-10-65836986