


PREMIUM 特优

gerflor.com
gerflor.cn




Gerflor[®]
theflooringroup

WHEN DESIGN MEETS THE BEST OF 当设计遇见最佳技术! TECHNOLOGIES!

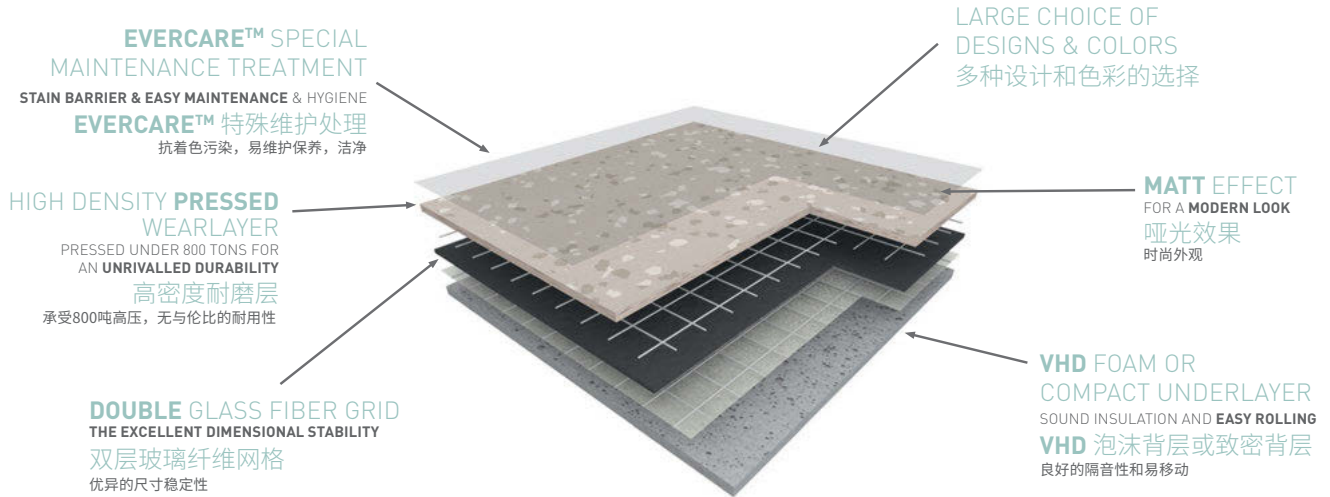


■ EASY ROLLING OF HEAVY LOADS 易移动和承受重载

Premium floorings offer the best dynamic indentation: **starting force and pushing are reduced by 35% in comparison with other floorings.**
特优地板可供优异的动压载荷: 与其他地板相比, 拉力和推力均减少了35%。

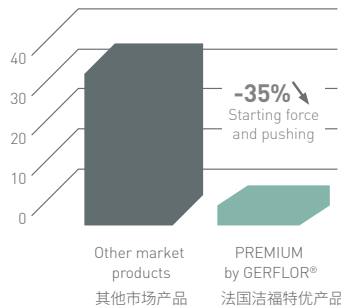


■ THE EXCELLENT INDENTATION RESISTANCE / ACOUSTIC PERFORMANCE 抗压痕性/隔音性良好

Gerflor® floorings offer a very good indentation and pressure point loading resistance (bed or furniture etc.)
法国洁福地板的抗压痕性和抗点压载荷(床或家具等)负荷性极佳
Combined acoustic and walking comfort for calming and relaxing areas.
在安静和休闲场所, 兼具隔音性和行走舒适性。



COMPACT VERSION
8dB
Indentation: 0.02 mm
致密系列
8dB
抗压痕性: 0.02 mm



COMFORT VERSION
17dB
Indentation: 0.06 mm
舒适系列
17dB
抗压痕性: 0.06 mm

PREMIUM 特优


**The best of both worlds!
两全其美!**

In the resilient flooring market, **Premium** offers the best of 2 worlds:

- Homogeneous inlaid surface
- Multilayered construction

在弹性地板市场, **Premium 特优** 可以实现两全其美:

- 同透嵌入式表面
- 多层复合结构

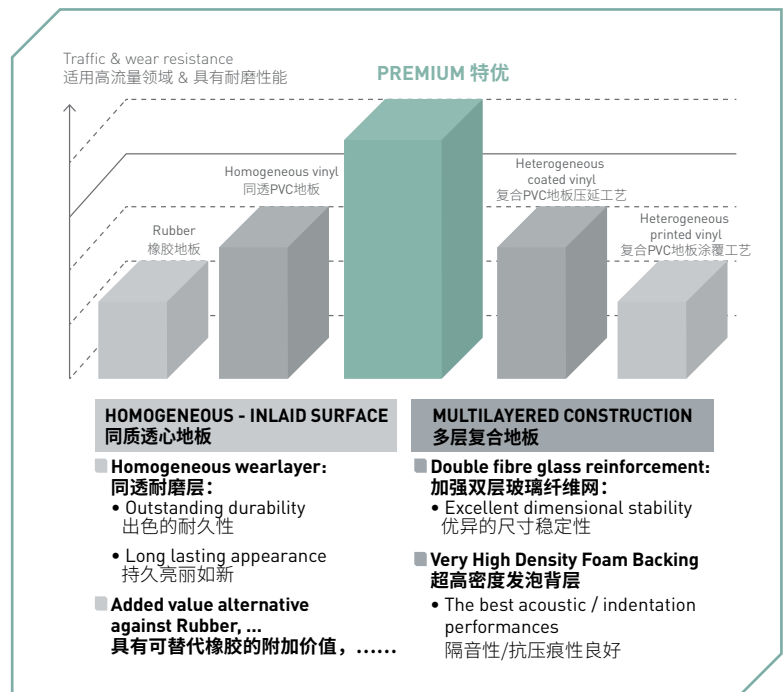



A NEW GENERATION
OF FLOORING
新一代地面材料



VERY HIGH TRAFFIC
RESISTANCE
抗高交通流量



HYGIENE
EASY MAINTENANCE,
STAIN RESISTANCE
洁净、易维护保养、
耐污



COMPACT SHEET
致密卷材



COMFORT SHEET
舒适卷材



ATTRACTION®
RENOVATION TILE
ATTRACTION® 块材



GERFLOR DRY-TEX SYSTEM
ON HIGH MOISTURE
SUBFLOORS
洁福 DRY-TEX 系统
应用于潮湿地表环境

My Premium
OFFER

minimum order quantity of 2000 sqm

MY PREMIUM
最低起订量 2000 平米



EXTRAORDINARY TECHNOLOGIES IN ONE 独一无二的产品

EVERCARE™ TECHNOLOGY

EVERCARE™ 专利技术



Stain
resistance
抗污



Matt surface
哑光表面

100% PURE HOMOGENEOUS WEARLAYER

100%纯PVC 同透耐磨层



Superior abrasion
& traffic resistance
优异的耐磨和抗压
性能



Long lasting
colors
花色经久不变

MULTILAYERED CONSTRUCTION

多层复合结构



Exceptional
dimensional
stability
出色的尺寸稳定性



Acoustic properties
吸音性能

- 17 dB (Comfort sheet)
17 dB 舒适卷材
- 8 dB (Compact sheet)
8 dB 致密卷材

A SUSTAINABLE CHOICE 可持续发展的选择



Best LCA
Most durable
Less water & detergent use
优异的 LCA
更耐用
节约水和清洁剂的使用




Emissions below
detection levels
排放量低于检测要求




BRAZILIA 巴西利亚




4477 Maceio

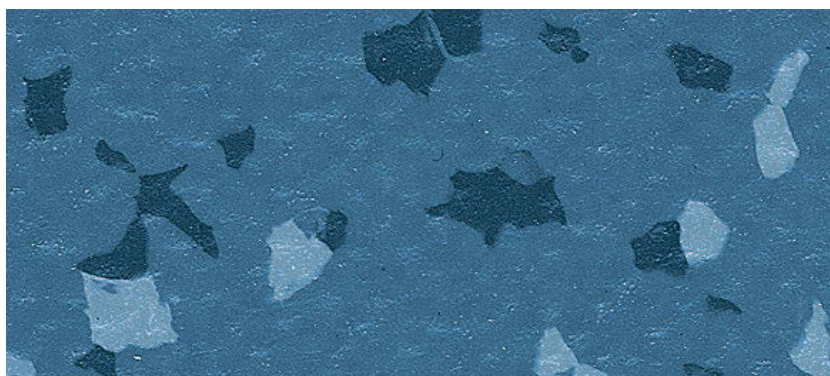

4478 Copacabana


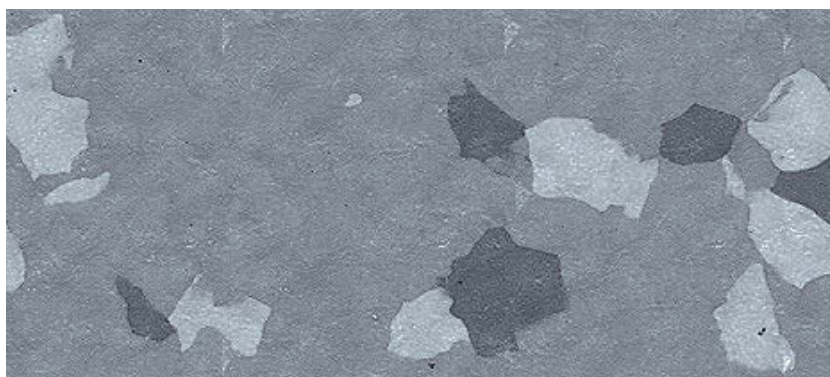


3709 Ceara

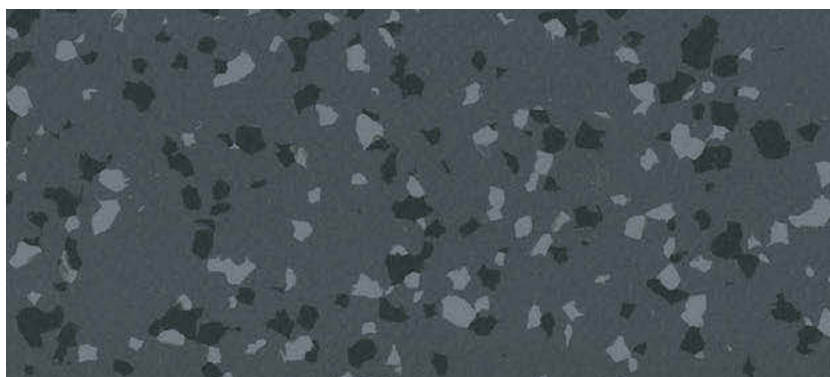

3707 Paraiba




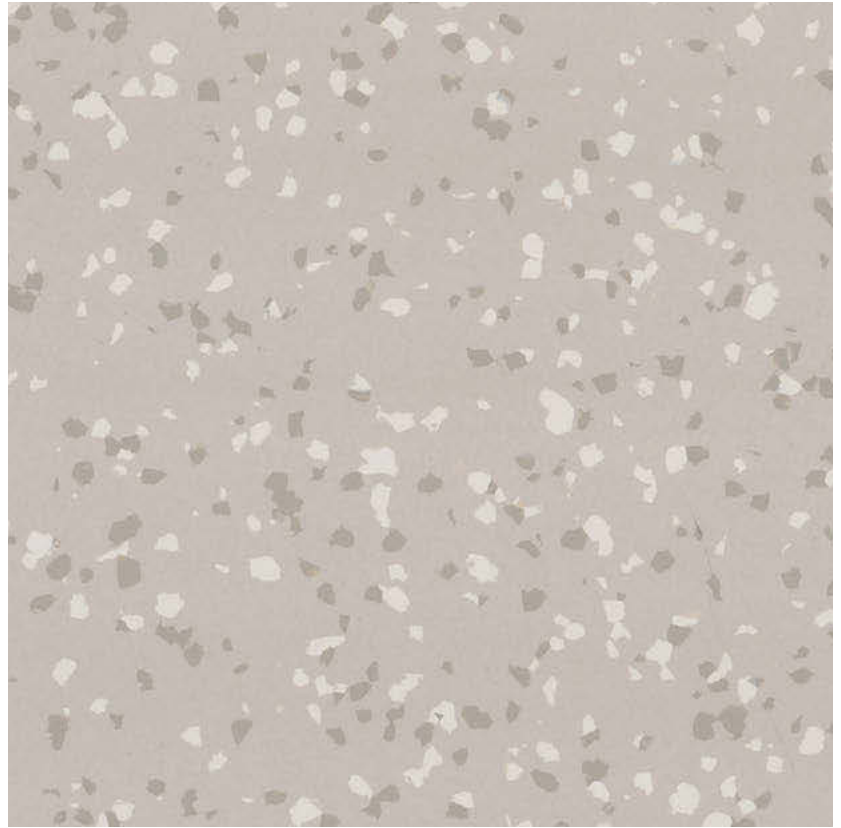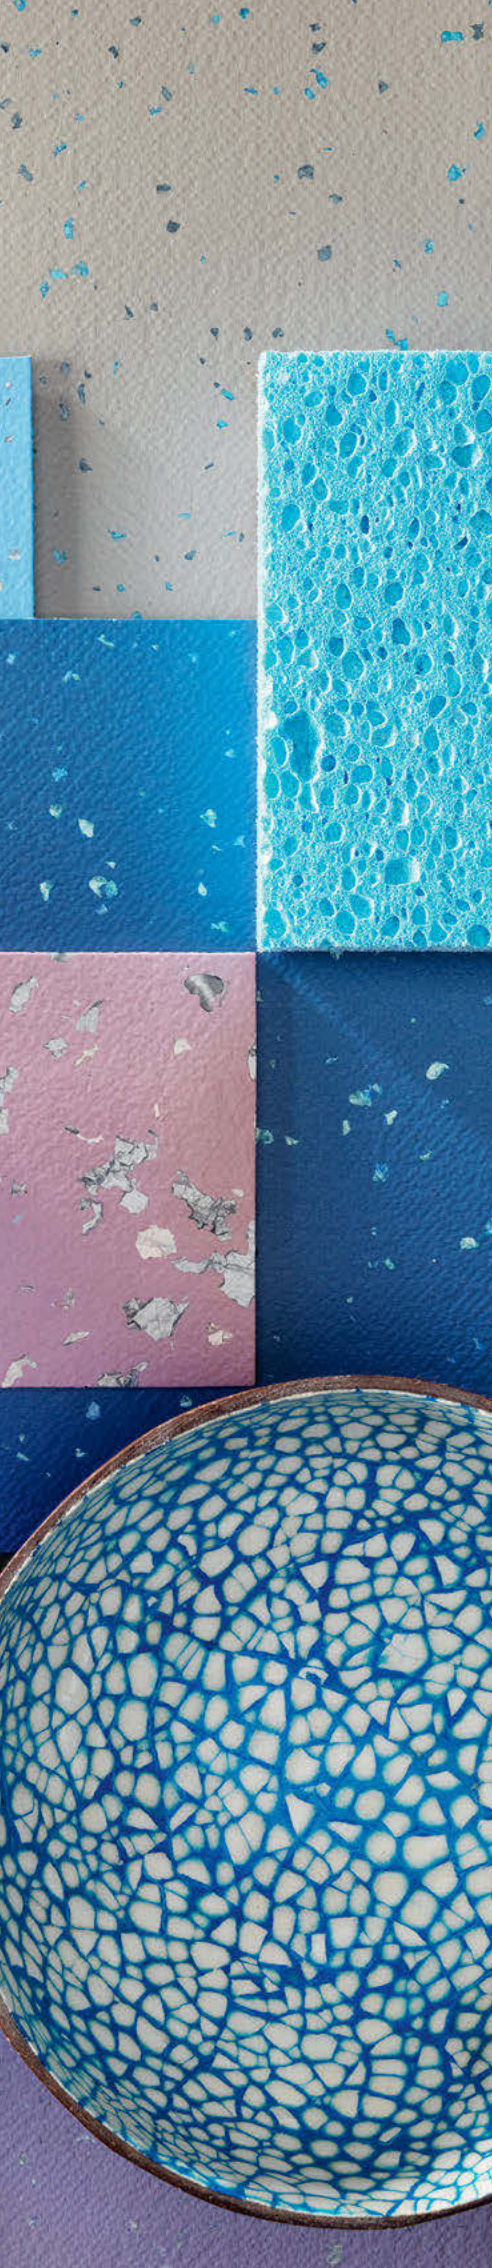


4342 Juara



8386 Boa Vista

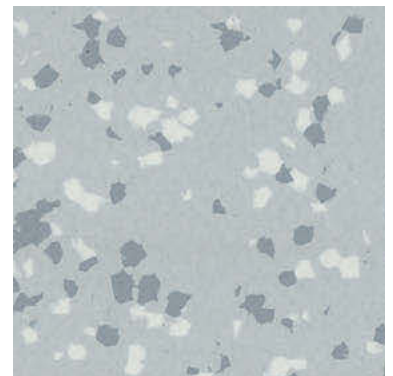

8736 Recife

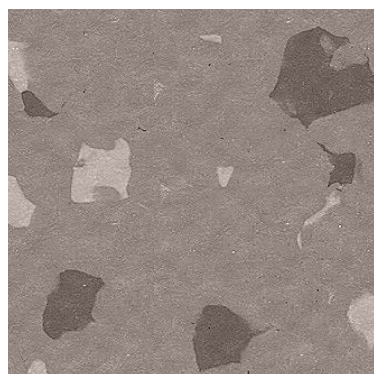


4329 Bacabal



3734 Almerim



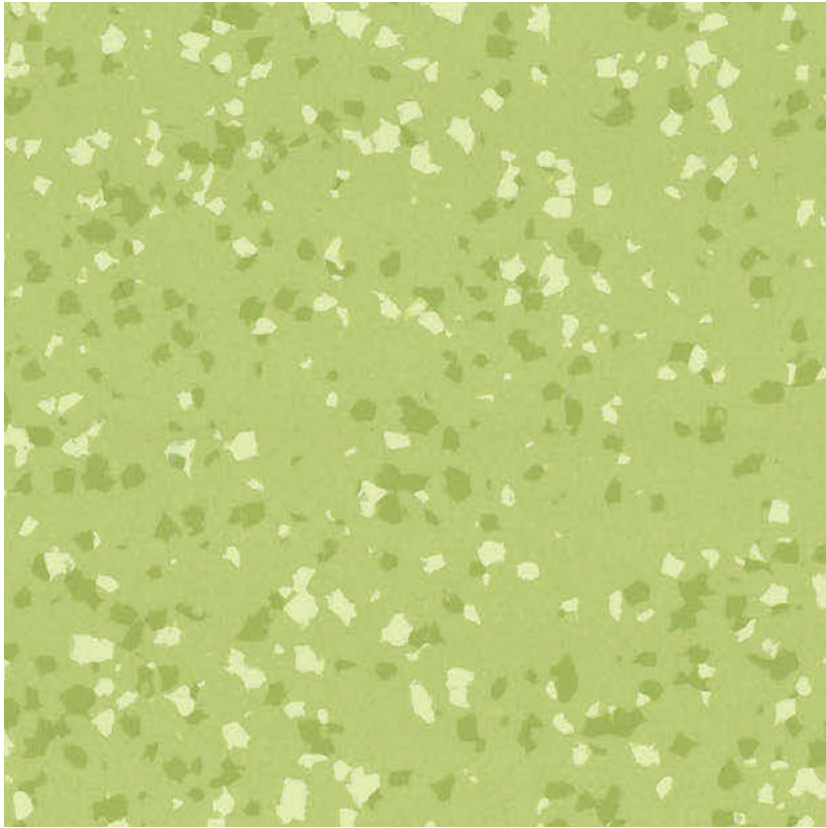


8577 Amazonas




8269 Ipanema




8157 Goias

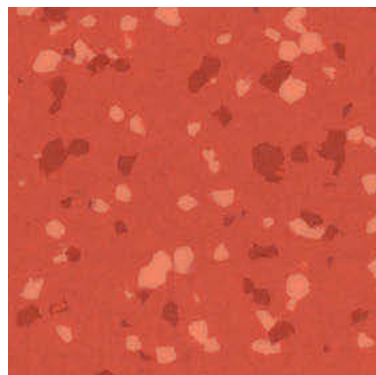

4136 Sao Luis

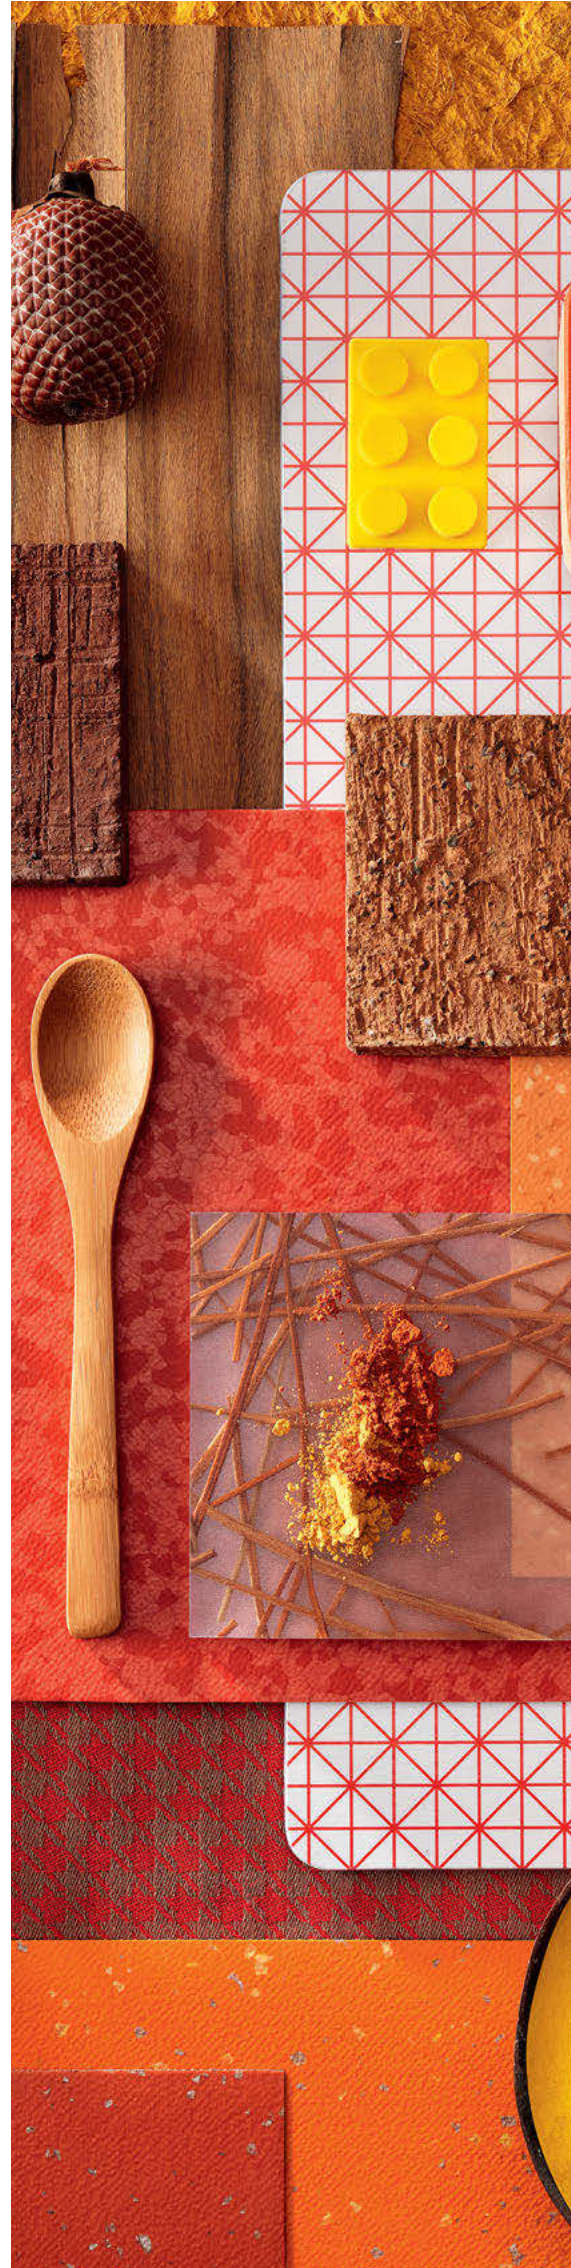

INDIANA 印第安那

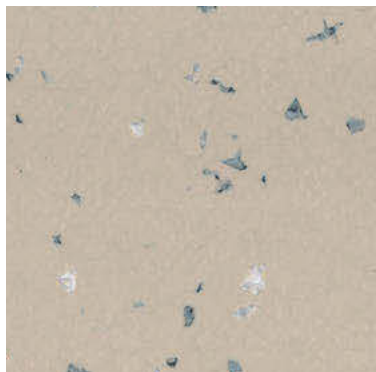


4343 Tokelau




4001 Ofu



8256 Tahaa

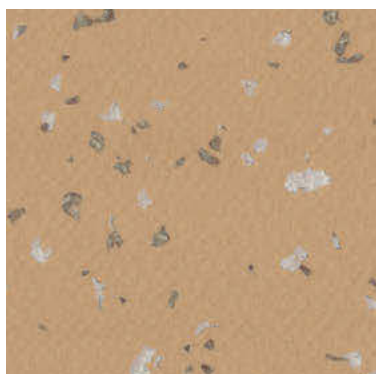

8262 Rodrigues

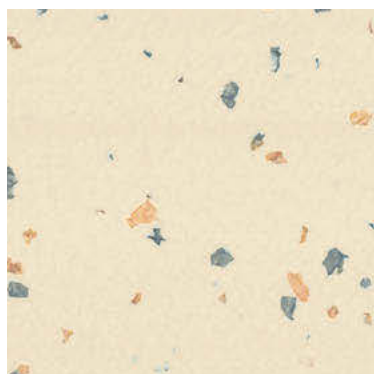


4009 Tufoa



4142 Penang




8150 Bali

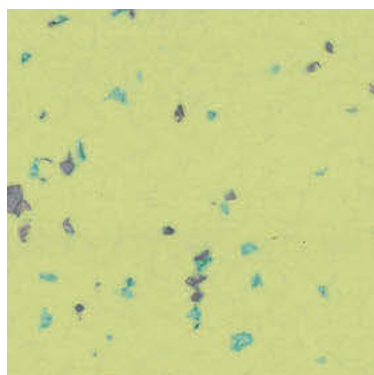


4015 Guinea




4146 Moheli

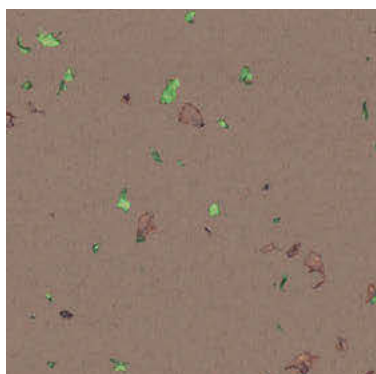

8059 Nicobar

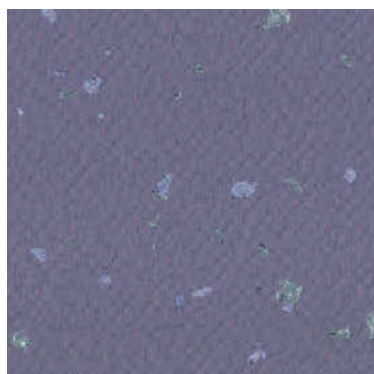


4135 Aldabra

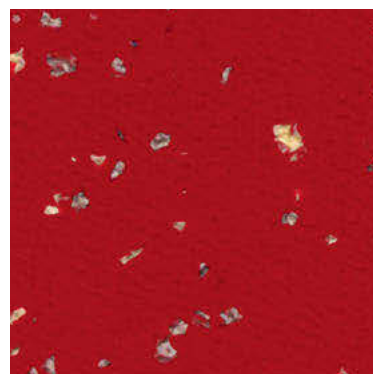


8194 Kornati



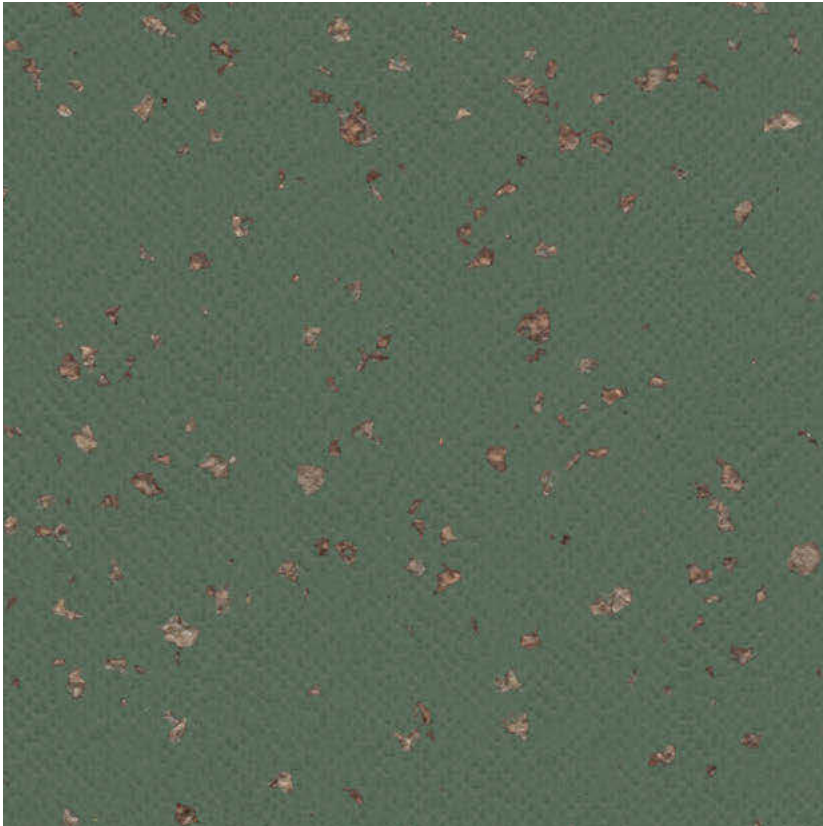

7517 Faroe

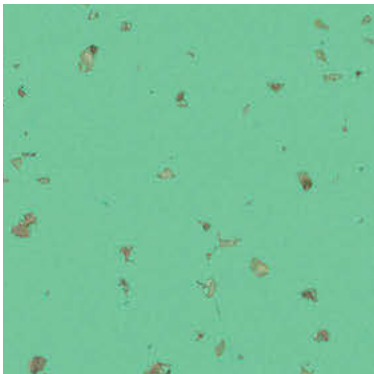


4526 Lasia



8850 Maupiti



4469 Pemba

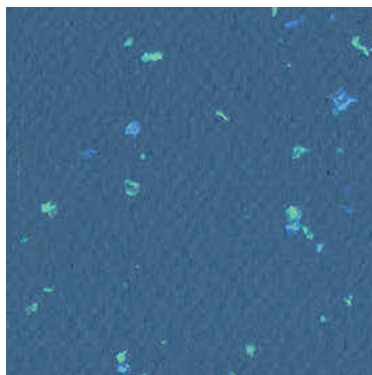


4476 Wattaru







4002 Manua

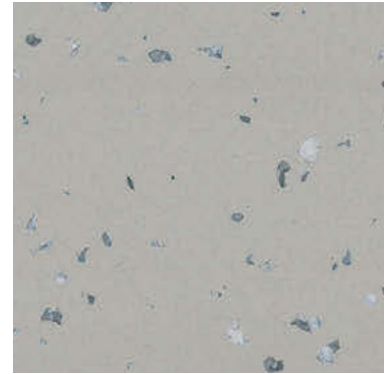


3788 Nauru

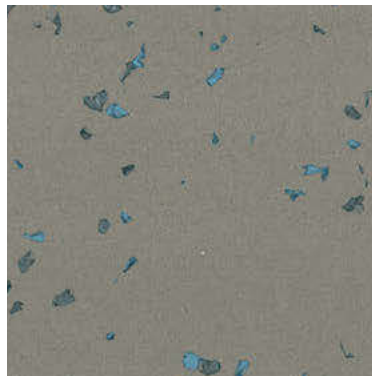


8053 Anambas

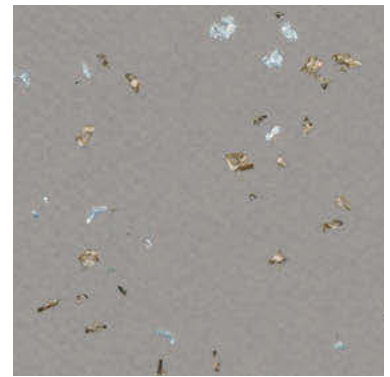

8226 Fidji

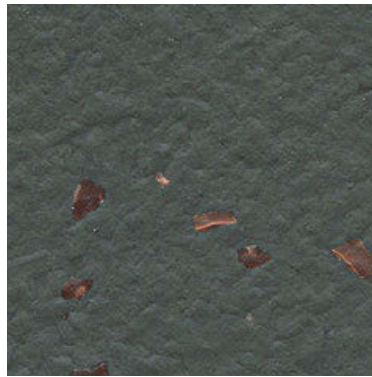


8470 Samoa

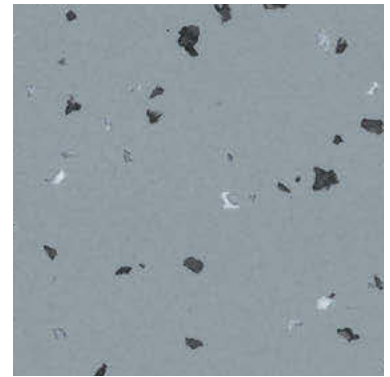

4003 Tao



8837 Songo

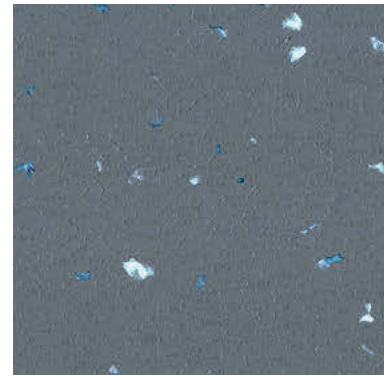

4004 Pago



PREMIUM COMPACT 特优致密	PREMIUM COMFORT 特优舒适
-------------------------	-------------------------

DESCRIPTION 规格

	EN ISO 24346 (EN 428)	mm	Brazilia - Indiana 巴西利亚 - 印第安那	Brazilia - Indiana 巴西利亚 - 印第安那
Total thickness 总厚度	EN ISO 24346 (EN 428)	mm	2.0	3.00-3.30
Wearlayer thickness 耐磨层厚度	EN ISO 24340 (EN 429)	mm	> 1	> 1
Weight 重量	EN ISO 23997 (EN 430)	g/sq.m	2580-2680	2800-3260
Width of sheet 卷宽	EN ISO 24341 (EN 426)	cm	200	200
Length of sheet 卷长	EN ISO 24341 (EN 426)	ml	20	25

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	EN ISO 10582(EN 649)	EN 651
European classification 产品分级	EN ISO 10874 (EN 685)	class	34 - 43	34 - 42
Fire rating 防火等级	EN 13 501-1	class	Bfl-s1	Cfl - s1
Slip resistance wet(1) 防湿滑性	DIN 51 130	class	R10	R10

PERFORMANCE 性能

Type binder content 粘合物分级	EN ISO 10582	type	I	-
Dimensional stability 尺寸稳定性	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40
Residual indentation (requirement) 残余凹陷度(要求值)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.20
Residual indentation (measure) 残余凹陷度(测量值)	-	mm	≈ 0.02	≈ 0.06
Impact sound insulation 隔音(隔声)性能	EN ISO 717-2	dB	8	16
Castor chair test (type W) 椅子脚轮测试	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity 热传导性	EN ISO 10456 (EN 12 524)	W/(m.K)	0.25	0.25
Colour fastness 颜色稳定性	EN 20 105 - B02	degree	≥ 6	≥ 6
Special maintenance treatment 特殊维护处理	-	-	Evercare™	Evercare™
Chemical products resistance(2) 抗化学性	EN ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial activity (E.coli-S.aureus)(3) 抑菌性能(大肠杆菌和金黄色葡萄球菌)	ISO 22196	-	> 99 % inhibits growth 抑菌率 >99%	> 99 % inhibits growth 抑菌率 >99%
Antiviral activity (human coronavirus 229E) 抗病毒活性(人类冠状病毒229E)	ISO 21702	-	99.7% (2小时)	99.7% (2小时)

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

TVOC after 28 days 28天后TVOC 排放量	ISO 16000 - 6	µg/m ³	< 10	< 10
Certification 证书	-	-	Floorscore®	Floorscore®

CE MARKING CE标志

	EN 14041	-		
--	----------	---	--	--

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges. 对于永久抗湿滑产品, 请关注Tarasafe系列产品

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website. 关于抗化学性, 请到网站下载相应产品单页。

(3) The implementation of an effective cleaning regime is the most important defence against infection. 实施有效的清洁方法是抗感染最重要的防御措施。

Product descriptions, installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

产品描述, 安装和维护指导, 以及其他产品的详细信息可参见法国洁福官网。

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

橡胶会在乙烯基地板上留下无法擦拭的污点: 请勿在PVC地板上使用橡胶背衬, 用PVC或者聚酰胺(尼龙)材质替代橡胶家具背衬。
在入口处放置足够长度的门垫, 以减少外部的灰尘污物。

WE CARE | WE ACT. Our Commitments for a Sustainable future



CARBON FOOTPRINT*
碳足迹*

2020年至2025年间
二氧化碳当量/平方米
-20% (公斤)



BIOSOURCED CONTENT***
生物基成分***

2025年达到 10%



RECYCLED CONTENT
循环再生成分

2025年达到 30%



ADHESIVE FREE**
免胶产品**

2025年达到 35%



ANNUAL VOLUME RECYCLED
年回收量

2025年达到 60,000吨

* 温室气体核算体系 (GHG) 中界定的范围 1 和 2 **使用免胶产品的业务占比 ***使用生物基产品的业务占比



随时找到 Gerflor® 法国洁福



请微信扫码,
关注Gerflor® 法国洁福

法国洁福 Gerflor®
theflooringgroup

GERFLOR CHINA 法国洁福-中国

SHANGHAI BRANCH 上海分公司 Tel. / 电话: +86-21-63578818

BEIJING BRANCH 北京分公司 Tel. / 电话: +86-10-65836986