

Please find below the UL Environment third-party certified EPD for **Taraflex range**.

This EPD covers 6 references : Taraflex Recreation 60, Taraflex Comfort, Taraflex Surface, Taraflex Performance, Taraflex Multi-Use, Taraflex Evolution.

It's calculated on a 75-year building service life scenario, as requested by UL certification body.

Here is a summary, for your convenience, of the **GWP results** for **Europe, USA, and Norway**, with 3 different service life scenarios (**1 year, 25 years and 75 years**). We also outline some key assumptions used in this EPD.

1. Carbon footprint of the product - in a nutshell

▪ **GWP 1 year**

GWP (kg CO2 eq./m2)	TOTAL LIFE CYCLE	A1	A2	A3	TOTAL PRODUCTION	A4	A5	TOTAL CONSTRUCTION	B2	B4	TOTAL USE	C2	C4	TOTAL End of Life
		Raw materials Supply	Transport	Manufacturing		Transport	Installation		Maintenance	Replacement		Transport	Elimination	
EUROPE	15,42	6,16	0,26	1,83	8,25	1,17	2,36	3,53	0,29	-	0,29	0,13	3,22	3,35
USA	14,80	6,16	0,26	1,83	8,25	3,08	2,57	5,65	0,35	-	0,35	0,13	0,42	0,55
NORWAY	22,57	6,16	0,26	1,83	8,25	1,25	2,41	3,66	0,13	-	0,13	0,13	10,40	10,53

▪ **GWP 25 years (product reference service life)**

Same calculation as GWP 1 year, but with B2 maintenance over 25 years.

GWP (kg CO2 eq./m2)	TOTAL LIFE CYCLE	A1	A2	A3	TOTAL PRODUCTION	A4	A5	TOTAL CONSTRUCTION	B2	B4	TOTAL USE	C2	C4	TOTAL End of Life
		Raw materials Supply	Transport	Manufacturing		Transport	Installation		Maintenance	Replacement		Transport	Elimination	
EUROPE	22,33	6,16	0,26	1,83	8,25	1,17	2,36	3,53	7,20	-	7,20	0,13	3,22	3,35
USA	23,15	6,16	0,26	1,83	8,25	3,08	2,57	5,65	8,70	-	8,70	0,13	0,42	0,55
NORWAY	25,73	6,16	0,26	1,83	8,25	1,25	2,41	3,66	3,29	-	3,29	0,13	10,40	10,53

▪ **GWP 75 years (building estimated service life)**

Product's life expectancy being 25 years and building's life expectancy being 75 years, 2 product replacements will be necessary. The impact of these replacements can be found in indicator B4 "Replacement". B2 "Maintenance" is also proportional to the number of years considered.

The GWP assessment in the EPD document is based on this 75-year scenario. Please see results on pages 22-23-24 of the EPD : table 22 (USA –CML calculation method), table 23 (Norway), table 24 (Europe).

GWP (kg CO2 eq./m2)	TOTAL LIFE CYCLE	A1	A2	A3	TOTAL PRODUCTION	A4	A5	TOTAL CONSTRUCTION	B2	B4	TOTAL USE	C2	C4	TOTAL End of Life
		Raw materials Supply	Transport	Manufacturing		Transport	Installation		Maintenance	Replacement		Transport	Elimination	
EUROPE	67,03	6,16	0,26	1,83	8,25	1,17	2,36	3,53	21,60	30,30	51,90	0,13	3,22	3,35
USA	69,45	6,16	0,26	1,83	8,25	3,08	2,57	5,65	26,10	28,90	55,00	0,13	0,42	0,55
NORWAY	77,10	6,16	0,26	1,83	8,25	1,25	2,41	3,66	9,86	44,80	54,66	0,13	10,40	10,53

2. Life cycle assessment assumptions

Life cycle assessment assumptions in EPD		Comments
Building Estimated Service Life (ESL)	75 years	UL certification requires that we consider a building reference service life of 75 years.
Product Reference Service Life (RSL)	25 years	-
Production site	France (Tarare factory)	-
Transport distance to user	<ul style="list-style-type: none"> Europe 1631 km (road, boat) USA 11 298 km (road, boat, train) Norway 2476 km (road, boat) 	3 different scenarios for user location. For Europe, average distance is based on sales volumes per country.
End of life scenario	<ul style="list-style-type: none"> Europe : average scenario = 74% landfill and 26% incineration USA : 100% landfill Norway : 92% incineration and 8% landfill <p>Note : recycling programs are available in several countries but not taken into account here</p>	

Nathalie Faure
Sustainability Certification Manager
August 1, 2023



ENVIRONMENTAL PRODUCT DECLARATION

TARAFLEX COLLECTION

VINYL FLOORING



Taraflex – Sports Flooring Collection



Because we think actions speak louder than words, Gerflor has always been willing to act and to develop flooring solutions that meet the most challenging requirements in term of design, durability, easy installation, acoustic comfort, ...

When it comes to sustainability, we also set ourselves to the highest standards. We believe in developing great products that not only perform, but also contribute to achieving high indoor air quality and top contribution to all green building certification schemes.

Taraflex vinyl flooring collection:

- According to ISO 22196 and ISO 21702, they have, respectively, anti-bacterial activity against MRSA of 99% after 24h00 and anti-viral activity against human coronavirus 229E of 99.7% after 2h00.
- The products emission rate of volatile organic compounds are <math>< 100 \mu\text{g}/\text{m}^3</math> (TVOC after 28 days – ISO 16000-6).
- Taraflex collection has an exclusive and patented Triple Action ProtecSol® surface treatment which allowed easy maintenance and avoids any burns when dropped.
- They have the Floorscore® and M1 certifications.

Taraflex are developed with a view to optimize the environmental impact at every stage of the product's life. This includes assessment of the manufacture, installation, ongoing maintenance, eventual uplift, and recycling of the products. As part of this commitment, Gerflor has decided to take a leadership position by publishing a third party independently verified EPD for each of its product ranges.



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Environment 333 Pfingsten Road, Northbrook, IL 60611	https://www.ul.com/ https://spot.ul.com
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.4 July 2018	
MANUFACTURER NAME AND ADDRESS	GERFLOR 50 Cours de la République, 69100 Villeurbanne, France	
DECLARATION NUMBER	4790579418.102.1	
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	Taraflex vinyl flooring The functional unit used for this study is 1m ² of heterogeneous vinyl sports flooring, for a 25 years service life, and for a building estimated service life of 75 years.	
REFERENCE PCR AND VERSION NUMBER	PCR -Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0, UL Environment. PCR - Part B: Flooring EPD Requirements, Second Edition, Dated September 28, 2018, UL Environment.	
DESCRIPTION OF PRODUCT APPLICATION/USE	The products are classified in accordance with EN 14904 to suit most indoor sports and all types of players.	
PRODUCT RSL DESCRIPTION (IF APPL.)	The stated RSL is 25 years. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. The ESL is 75 years, so two replacements are required.	
MARKETS OF APPLICABILITY	Norwegian, European and US Commercial market	
DATE OF ISSUE	April 1, 2023	
PERIOD OF VALIDITY	5 years	
EPD TYPE	Product-specific	
RANGE OF DATASET VARIABILITY	Six products are considered in this EPD.	
EPD SCOPE	Cradle to Grave	
YEAR(S) OF REPORTED PRIMARY DATA	2020	
LCA SOFTWARE & VERSION NUMBER	Simapro 9	
LCI DATABASE(S) & VERSION NUMBER	Ecoinvent 3.7.1 – allocation cut-off by classification	
LCIA METHODOLOGY & VERSION NUMBER	Method EN 15804 A2 EPD Ev-DEC 1.07 (EVEA)	

The PCR review was conducted by:	UL Environment
	PCR Review Panel
	epd@ul.om
This declaration was independently verified in accordance with ISO 14025: 2006. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	<i>Cooper McCollum</i> Cooper McCollum, UL Environment
	<i>Thomas P. Gloria</i> Thomas, P. Gloria, Industrial Ecology Consultants

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

1. Product Definition and Information

1.1. Description of Company/Organization

The products are commercialized by Gerflor and made in Tarare Manufacturing Plant (France). This plant complies with:

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- ISO 50001 Energy Management System

1.2. Product Description


Product Identification

Product Designation: "Taraflex flooring collection"

This environmental product declaration covers Gerflor Taraflex flooring collection. The products are heterogeneous vinyl sports flooring in strips of different sizes, for glued or adhesive installation. They are made by coating, calendaring and gluing. They are made of organic binders, plasticizers, inorganic filler, stabilizers, additives, reinforcement, insulation and a surface treatment Triple Action Protescsol® or PUR protect to maximize the support of play, easy maintenance and avoid burns in case of fall.

The following figures show Taraflex flooring collection:

Figure 1: Taraflex Recreation 60

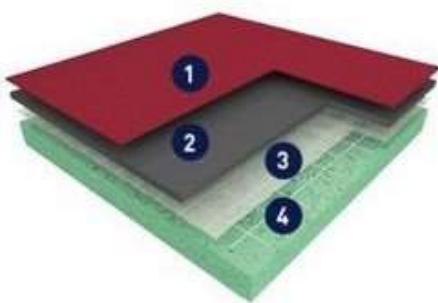

1. PUR protect Surface Treatment
2. 100% PVC surface complex
3. Fibre-glass grid reinforcement
4. Closed cell foam backing



ENVIRONMENTAL PRODUCT DECLARATION




Taraflex
Sports Flooring Collection




According to ISO 14025,
EN 15804

Figure 2: Taraflex Comfort

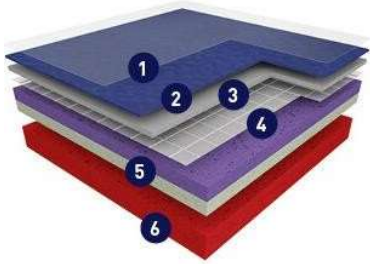


1. Triple Action ProtecSol® Surface Treatment
2. D-Max 2.1 mm wear layer
3. CXP HD foam backing
4. Sanosol® Antimicrobial Treatment

Figure 3: Taraflex Surface

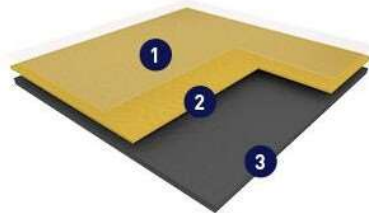

1. Triple Action ProtecSol® Surface Treatment
2. Very High Density (VHD) foam backing
3. Sanosol® Antimicrobial Treatment

Figure 4: Taraflex Performance

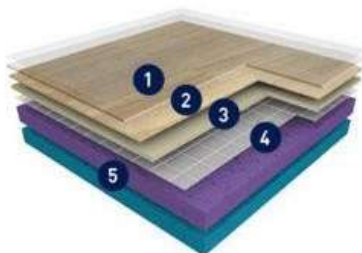

1. Triple Action ProtecSol® Surface Treatment
2. Design film
3. Recycled calendared surface backing
4. D-MAX
5. CXP-HP



ENVIRONMENTAL PRODUCT DECLARATION




Taraflex
Sports Flooring Collection




According to ISO 14025,
EN 15804

Figure 5: Taraflex Multi-use

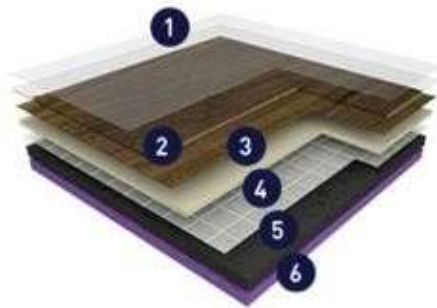

1. Triple Action ProtecSol® Surface Treatment
2. Wear layer
3. Printed design layer
4. Recycled calendered backing
5. D-Max reinforced fiberglass grid
6. CXP-HD + foam technology

Figure 6: Taraflex Evolution

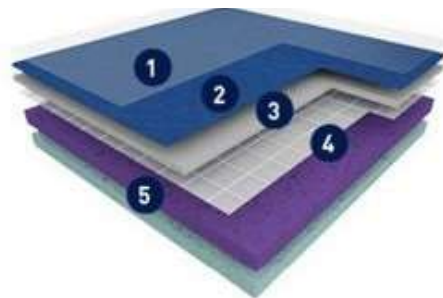

1. Triple Action ProtecSol® Surface Treatment
2. Wear layer
3. Printed design layer
4. Recycled calendered backing
5. D-Max reinforced fiberglass grid
6. CXP-HD + foam technology

Product Specification

The products considered in this EPD meet or exceed one of the following Technical Specifications:

Taraflex flooring meet requirements of the standard EN 14904 – Surfaces for sports areas – Indoor surfaces for multi-sports use.

Specification Fire Testing:

Class 1 when tested in accordance with ASTM E 648, Standard Test Method for Critical Radiant Flux

Class 1 when tested in accordance with ASTM E 662, Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials

The products also possess the following characteristics:

- EN 13501-1 Fire Behavior
- Slip Resistance R10
- M1 certified
- 100% Floorscore

The product is classified according to the United Nations Standard Products and Service Code (UNSPSC) as « Vinyl Flooring »: UNSPSC Code 30161707. And according to Construction Specification Institute (CSI) as « Resilientflooring »: CSI Code 09 65 00.



ENVIRONMENTAL PRODUCT DECLARATION




Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Flow Diagram

Figure 7: Flow product diagram

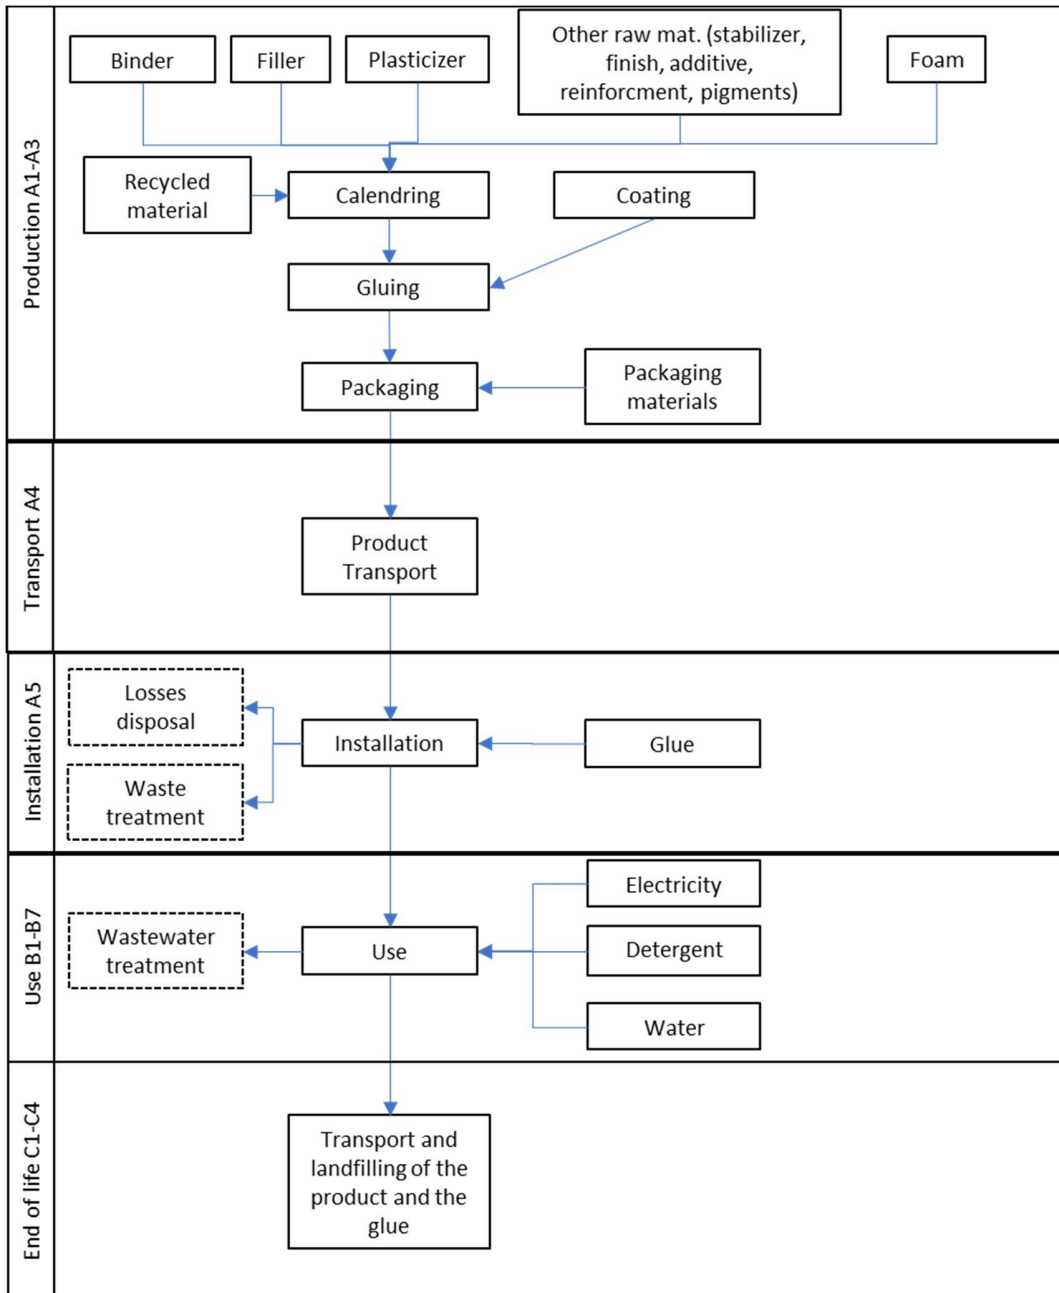

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

1.3. Application

The products are classified in accordance with EN 14904 to be suit most indoor sports and all types of players..

1.4. Declaration of Methodological Framework

This EPD covers the entire life cycle of the products from cradle to grave (modules A1 to C4) excluding modules for which there are no inputs/outputs. No known flows are deliberately excluded from this EPD.

For these products, the stated RSL is 25 years. It should be noted, however, that the service life of a heterogeneous vinyl sports flooring may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with that defined by ISO 14041 in accordance with the product's classification.

1.5. Technical Requirements

Table 1: technical data

Name	Value	Unit
Product Thickness	7.41	mm
Product Weight	4.60	kg/m ²
Density	652	kg/m ³

1.6. Properties of Declared Product as Delivered

The product declared in this document complies with the following codes or regulations:

- Floorscore SCS-FS-02145
- M1



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

1.7. Material Composition

Table 2: Material content

Component	Mass %
Binder	20-30%
Plasticizer	10-20%
Stabilizer	< 5%
Filler	10-20%
Additive	< 1%
Finish	< 1%
Isolator	< 1%
Reinforcement	< 1%
Recycled content	30-40%
Packaging	5-10%

1.8. Manufacturing

Taraflex flooring collection are made in the Gerflor manufacturing plant in Tarare, in France.

The production of the sheets is divided into the following stages:

- Mixing: Binder, filler, plasticizer, stabilizer, additives and pigments are mixed to obtain mixture
- Coating: The rolls are then coated to get the desired shape (for products containing foam only)
- Calendering: The rolls are then calendered to get the desired shape.
- Reinforcement and finish.
- Shaping: rolls are cut at the desired dimensions.
- Surface treatment: The surface treatment is then applied to get the best durability possible.



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

Figure 8: Coating process


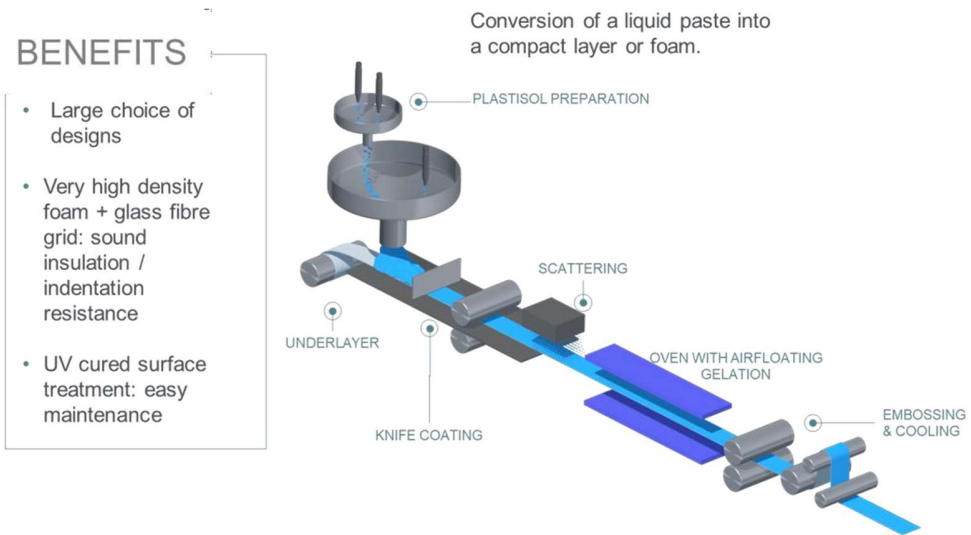


Figure 9: Calendering process



1.9. Packaging

Each roll is protected by 100% recycled corrugated cardboard, two cardboard discs and then wrapped in PE film. The rolls are stored upright on a wooden pallet, which is protected by a cover.

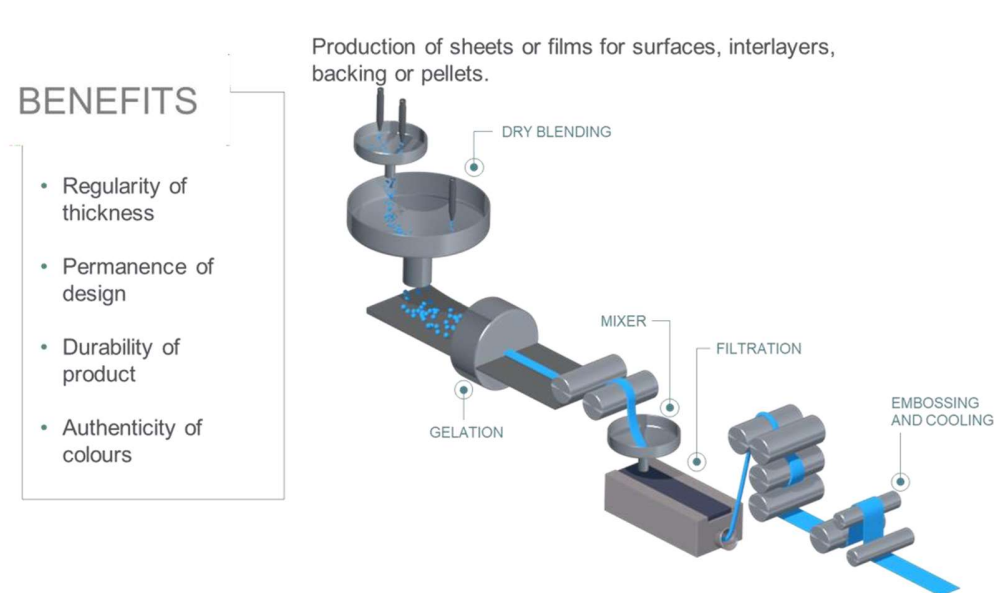

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

As describe in ULE Part A Requirements, the packaging waste scenario for European market is :

- 76.4% recycling, 16.4% landfilling and 7.2% incineration for paper and carboard
- 24.8% recycling, 54.8% landfilling and 20.4% incineration for wood
- 37% recycling, 35% landfilling and 28% incineration for plastic

The packaging waste scenario for US market is:

- 73% recycling, 22% landfilling and 5% incineration for paper and carboard
- 80% landfilling and 20% incineration for wood
- 9.6% recycling, 72.3% landfilling and 18.1% incineration for plastic

According to the Ecoinvent datas, the packaging waste scenario for Norway represents 92% against 8% of landfill.

1.10. Transportation

Taraflex flooring collection is made in France and is then sent to the European, Norwegian or US market. Distances taken in account are described below.

MEANS OF TRANSPORT	NORWEGIAN MARKET		US MARKET		EUROPEAN MARKET	
	Journey	Distance (km)	Journey	Distance (km)	Journey	Distance (km)
Road – 16-32T Truck	From Tarare factory to the port of Zeebrugge (Belgium)	790	From Tarare factory to the port of Fos-Sur-Mer (France)	340	From Tarare factory to customers	1421
Boat	Zeebrugge (Belgium) to Goteborg (Sweden)	1007	Fos-Sur-Mer to Montreal (Canada)	7167	From Tarare factory to customers	210
Rail	-	-	Montreal to Chicago (US)	1357	-	-
Road – 16-32T Truck	Goteborg port to Norwegian's warehouse: Vestby, and then to customer	679	Chicago to Bensenville warehouse and then to customer in Denver	2434	-	-

1.11. Product Installation

The products are installed by using acrylic glue. Approximately 250 g/m² of this water-based low emission adhesive is used to fix the flooring in place.



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

During the installation approximately 10% of the material is lost as off-cuts – this waste is mainly sent to incineration for Norwegian market and is landfilled for US market. Waste classification is according to RCRA for North American region (Resource Conservation and Recovery Act (RCRA), Subtitle 3).

1.12. Use

Current cleaning of the installed floor has been included in this study as following:

- Dry vacuum cleaning : 3 times a week
- Wet cleaning by hand with water and detergent: 2 times a week.

1.13. Reference Service Life and Building Estimated Service Life

For this product, the stated RSL is 25 years and the building estimated service life (ESL) is 75 years. It should be noted however that the service life of Taraflex flooring may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with ISO 14041 in accordance with the product's classification. The number of replacements necessary to fulfill the required performance and functionality over the building Estimated Service Life of 75 years is two.

1.14. Reuse, Recycling, and Energy Recovery

There is a collection for recycling available on request for these products, but in general the end-of-life scenarios listed below are applied.

1.15. Disposal

For the purpose of this LCA, it has been assumed that 92% of the products are sent to incineration and 8% to landfill at the end of its useful life, according to the Ecoinvent datas and the producer's feedback for Norwegian market.

The products are sent to landfill site for US market. Products are considered as non-hazardous waste according to north america regulation.

According to the PCR ULE Part A, 50% of the product should be recycled for Europe. However, as no specific information was available for the flooring, it was assumed that 26% of the product would be incinerated and 74% landfilled.

The transport between construction site and incineration/landfill facility is by truck, with a distance of 161 km. There is no specific data for this distance for Norwegian and European market, so the North America's one is assumed by default.

2. Life Cycle Assessment Background Information

A full Life Cycle Assessment has been performed according to ISO 14040, ISO 14044 and in compliance with EN15804.

2.1. Functional or Declared Unit

The functional unit is one square meter of installed product. The reference service life considered is 25 years.

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 3: Functional Unit

	Value	Unit
Functional Unit	1	m ²
Mass	4.60	kg

2.2. System Boundary

EPD is declared from cradle to grave, including the following stages:

A1 – A3: includes the provision of all raw materials and their packaging, transport to the production site and energy consumption during the manufacturing of the product, as well as processing of waste generated by the factory.

A4 – A5: includes the transport from the factory to the final customer, packaging of the final product and the installation of the product, as well as all consumables and energy required and processing of waste generated during the installation.

B1 – B7: includes provision and transport of all materials, products and services related to the use phase of the product, as well as their related energy and water consumption, and the processing of any resulting waste.

C1 – C4: includes provision and transport of all materials, products and services related to the end of life phase of the product, including energy and water consumption, as well as the end of life processing of the product.

D: includes benefits coming from the wastes' end of life.

Table 4: Scope of the study

Modules	Production Stage			Construction Process Stage		Use Stage							End-of-Life Stage				Benefits & loads beyond syst. Bound.	
	Raw material supply	Transport to manufacturer	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use during product use	Operational water use during product use	Deconstruction	Transport	Waste processing	Disposal		Reuse, recovery or recycling potential
Accounted for:	X	X	X	X	X	X*	X	X*	X	X*	X*	X*	X*	X	X*	X	X	X

*module has been considered but has no associated inputs/outputs, therefore does not appear in the results.

2.3. Estimates and Assumptions

Estimates and assumptions are made for transport, installation and deconstruction procedure. Details are provided in



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

section "LCA: scenarios and additional technical information".

Transport distances have been calculated from the production site to the warehouse of the destination country.

Additional transport between the distribution center and the construction site is considered with a distance of 800 km, according to PCR, part B for US market. A distance of 424 km is considered for the Norwegian market, according to Gerflor's statements.

Transport distance from building site to the end of life treatment center is considered with a distance of 161 km, according to PCR part B.

2.4. Cut-off Criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of that unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

For this study, all input and output flows have been considered. Raw materials are included as per the product composition provided by the manufacturer and the packaging of the final product. Energy and water consumptions have also been considered at 100% according to the data provided.

2.5. Data Sources

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

To model the life cycle of the product in question, the software SimaPro 9, developed by PRé, has been used in conjunction with the LCA database ecoinvent v3.7.1.

2.6. Data Quality

The requirements for data quality and LCA data are in accordance with the specifications of the PCR.

Temporal Coverage – producer specific data is averaged over 1 year of production and from within the last 5 years (2020). Generic data is taken from the ecoinvent 3.7.1 database, the entirety of which was updated in 2020. Inputs and outputs from the system are accounted for over a period of 100 years from the year for which the data set is deemed relevant.

Technological Coverage – the technological coverage of the data reflects the physical reality of the declared product.

Geographical Coverage – whenever possible, country specific data reflecting the reality of the Gerflor supply chain has been used. If country specific data is unavailable, European regional data is used in preference to global data sources.

2.7. Period under Review

Data have been reviewed for the production year 2020.

2.8. Allocation

Allocations when using secondary materials as raw materials:

The recycled content comes from external sources (offcuts from installation and removal of old coatings), the end-of-waste status is considered at the level of the sorted material stock and no impact is assigned to the production of these



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

offcuts.

Allocations in the plant (differentiation from other products manufactured in the plant):

The overall values for the factory's material and energy consumptions during a period of one year have been divided by the annual production of each product to supply a value per square meter of flooring produced. All factory data is measured in square meters, and it is assumed that the process consumptions are governed by area of flooring processed rather than mass.

Allocation of multi-input processes if performed during modelling:

Production offcuts: the scraps are crushed and reintegrated into other products on other process lines. Since these scraps are not sold externally, a physical allocation is made between the main product and the scraps.

Thus, the overproduction to produce these losses is not considered in this case. The impacts of the production of these scraps are assigned to the system that uses them (other Gerflor products), so no impact is omitted.

Allocations of reuse, recycling and energy recovery: not concerned here.

2.9. Comparability (Optional)

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

3. Life Cycle Assessment Scenarios

For US market:

Table 5. Transport to the building site for US market (A4)

NAME	VALUE	UNIT
Truck		
Fuel type	Diesel, low sulfur	
Liters of fuel	26	l/100km
Vehicle type	16-32 metric ton EURO 6	
Transport distance	2774	km
Capacity utilization (including empty runs, mass based)	36	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-
Boat		
Fuel type	Heavy Fuel Oil	
Liters of fuel	0.047	l/100km
Vehicle type	Transoceanic Ship	
Transport distance	7167	km
Capacity utilization (including empty runs, mass based)	100	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-
Rail		
Energy type	Diesel	
Percentage diesel / electricity	100	%
Vehicle type	Freight train US	
Transport distance	1357	km
Capacity utilization (including empty runs, mass based)	100	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

For Norwegian market:

Table 6. Transport to the building site for Norwegian market (A4)

NAME	VALUE	UNIT
Truck		
Fuel type	Diesel, low sulfur	
Liters of fuel	26	l/100km
Vehicle type	16-32 metric ton EURO 6	
Transport distance	1469	km
Capacity utilization (including empty runs, mass based)	36	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-
Boat		
Fuel type	Heavy Fuel Oil	
Liters of fuel	0.047	l/100km
Vehicle type	Transoceanic Ship	
Transport distance	1007	km
Capacity utilization (including empty runs, mass based)	100	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-

For European market:

Table 7. Transport to the building site for European market (A4)

NAME	VALUE	UNIT
Truck		
Fuel type	Diesel, low sulfur	
Liters of fuel	26	l/100km
Vehicle type	16-32 metric ton EURO 6	
Transport distance	1421	km
Capacity utilization (including empty runs, mass based)	36	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

packaging products)		
Boat		
Fuel type	Heavy Fuel Oil	
Liters of fuel	0.047	l/100km
Vehicle type	Transoceanic Ship	
Transport distance	210	km
Capacity utilization (including empty runs, mass based)	100	%
Gross density of products transported	1317	kg/m ³
Weight of products transported (if gross density not reported)	-	kg
Volume of products transported (if gross density not reported)	-	m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	< 1	-

Table 8. Installation into the building (A5)

NAME	VALUE	UNIT
Ancillary materials	0.25	kg
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	-	m ³
Other resources	-	kg
Electricity consumption	-	kWh
Other energy carriers	-	MJ
Product loss per functional unit	4.60E-01	kg
Waste materials at the construction site before waste processing, generated by product installation	4.37E-01	kg
Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal)	-	kg
Biogenic carbon contained in packaging	6.26E-01	kg CO ₂
Direct emissions to ambient air, soil and water	-	kg
VOC emissions	-	kg/m ²

Table 9. Reference Service Life

NAME	VALUE	UNIT
RSL	25	years
Declared product properties (at the gate) and finishes, etc.	Declared product properties are described in Declaration of Performance (DOP), in accordance with EN 14041	-
Design application parameters (if instructed by the manufacturer), including references to the appropriate practices and application codes)	Products in accordance with EN 14041 and technical prescription of the manufacturer	-
An assumed quality of work, when installed in accordance with the manufacturer's instructions	Assumed to be installed according to the manufacturer's instructions	-
Outdoor environment, (if relevant for outdoor applications), e.g. weathering,	Assumed to be installed	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

pollutants, UV and wind exposure, building orientation, shading, temperature	according to the manufacturer's instructions	
Indoor environment, (if relevant for indoor applications), e.g. temperature, moisture, chemical exposure)	Use conditions in accordance with manufacturer prescriptions: see technical datasheet	-
Use conditions, e.g. frequency of use, mechanical exposure.	Maintenance scenario is defined in the table above	-
Maintenance, e.g. required frequency, type and quality of replacement components	Declared product properties are described in Declaration of Performance (DOP), in accordance with EN 14041	-

Table 10. Maintenance (B2)

NAME	VALUE	UNIT
Maintenance process information (cite source in report)	Dry vacuum cleaning: 3/week Wet cleaning: 2/week	-
Maintenance cycle	6.50E+03	Number/ RSL
Maintenance cycle	1.95E+04	Number/ ESL
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	5.20E+00	L/year
Ancillary materials specified by type (e.g. cleaning agent)	5.20E-02	kg/year
Other resources	-	kg
Energy input, specified by activity, type and amount	3.90E-01	kWh/year
Other energy carriers specified by type	-	kWh
Power output of equipment	-	kW
Waste materials from maintenance (specify materials)	-	kg
Direct emissions to ambient air, soil and water	-	kg
Further assumptions for scenario development (e.g. frequency and time period of use, number of occupants);	-	

Table 11. Repair (B3)

No data for given table



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

Table 12. Replacement (B4)

NAME	VALUE	UNIT
Reference Service Life	25	Years
Replacement cycle	2	(ESL-RSL)-1
Energy input, specified by activity, type and amount	-	kWh
Net freshwater consumption specified by water source and fate (e.g., X m3 river water evaporated, X m3 city water disposed to sewer)	-	m ³
Ancillary materials specified by type and amount (e.g. cleaning agent)	-	kg
Replacement of worn parts, specify parts/materials	-	kg
Direct emissions to ambient air, soil and water	-	kg
Further assumptions for scenario development, e.g. frequency and time period of use_	-	As appropriate

Table 13. Refurbishment (B5)

No data for given table

Table 14. Operational energy use (B6) and Operational water use (B7)

No data for given table

Table 15. End of life for US market (C1-C4)

NAME	VALUE	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)	Product are carried out by hand and sent to landfill. Waste transport is made by truck (16-32 metric ton Euro6). A 161km distance to the landfill treatment center has been considered	
Collection process (specified by type)	Collected separately	4.84E+00
	Collected with mixed construction waste	-
Recovery for US market (specified by type)	Reuse	-
	Recycling	-
	Landfill	4.84E+00
	Incineration	-
	Incineration with energy recovery	-
	Energy conversion efficiency rate	-
Disposal (specified by type)	Product or material for final deposition	-
	Removals of biogenic carbon (excluding packaging)	-
		kg CO ₂



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

Table 16. End of life for Norwegian market (C1-C4)

NAME		VALUE	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)		Product are carried out by hand and sent to landfill. Waste transport is made by truck (16-32 metric ton Euro6). A 161km distance to the treatment center has been considered	
Collection process (specified by type)	Collected separately	4.84E+00	kg
	Collected with mixed construction waste	-	kg
Recovery for Norwegian market (specified by type)	Reuse	-	kg
	Recycling	-	kg
	Landfill	3.87E-01	kg
	Incineration	4.45E+00	kg
	Incineration with energy recovery	-	kg
	Energy conversion efficiency rate	-	
Disposal (specified by type)	Product or material for final deposition	-	kg
Removals of biogenic carbon (excluding packaging)		-	kg CO ₂

Table 17. End of life for European market (C1-C4)

NAME		VALUE	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)		Product are carried out by hand and sent to landfill. Waste transport is made by truck (16-32 metric ton Euro6). A 161km distance to the treatment center has been considered	
Collection process (specified by type)	Collected separately	4.84E+00	kg
	Collected with mixed construction waste	-	kg
Recovery for Norwegian market (specified by type)	Reuse	-	kg
	Recycling	-	kg
	Landfill	3.87E+00	kg
	Incineration	9.68E-01	kg
	Incineration with energy recovery	-	kg
	Energy conversion efficiency rate	-	
Disposal (specified by type)	Product or material for final deposition	-	kg
Removals of biogenic carbon (excluding packaging)		-	kg CO ₂



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 18. Reuse, recovery and/or recycling potentials (D), relevant scenario information – US market

NAME	VALUE	UNIT
Net energy benefit from energy recovery from waste treatment declared as exported energy in C3 (R>0.6)	-	MJ
Net energy benefit from thermal energy due to treatment of waste declared as exported energy in C4 (R<0.6)	-	MJ
Net energy benefit from material flow declared in C3 for energy recovery	-	MJ
Process and conversion efficiencies		
Further assumptions for scenario development (e.g. further processing technologies, assumptions on correction factors);		

Table 19. Reuse, recovery and/or recycling potentials (D), relevant scenario information – Norwegian market

NAME	VALUE	UNIT
Net energy benefit from energy recovery from waste treatment declared as exported energy in C3 (R>0.6)	-	MJ
Net energy benefit from thermal energy due to treatment of waste declared as exported energy in C4 (R<0.6)	3.17E+01	MJ
Net energy benefit from material flow declared in C3 for energy recovery	-	MJ
Process and conversion efficiencies		
Further assumptions for scenario development (e.g. further processing technologies, assumptions on correction factors);		

Table 20. Reuse, recovery and/or recycling potentials (D), relevant scenario information –European market

NAME	VALUE	UNIT
Net energy benefit from energy recovery from waste treatment declared as exported energy in C3 (R>0.6)	-	MJ
Net energy benefit from thermal and electrical energy due to treatment of waste declared as exported energy in C4 (R<0.6)	8.97E+00	MJ
Net energy benefit from material flow declared in C3 for energy recovery	-	MJ
Process and conversion efficiencies		
Further assumptions for scenario development (e.g. further processing technologies, assumptions on correction factors);		



4. Life Cycle Assessment Results

The following results are given for the ESL of 75 years. For the RSL of 25 years, it is necessary to divide the results of B2 and D by three and to delete the results of B4, as two replacements are being considered.

4.1. Life Cycle Impact Assessment Results

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The results of these environmental impact indicators should be used with caution because the uncertainties in the results are high or because experience with the indicator is limited.

The indicators concerned are the following:

- Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)
- Abiotic depletion potential for fossil resources (ADP-fossil)
- Water (user) deprivation potential, deprivation-weighted water consumption (WDP)
- Ecotoxicity, freshwater
- Human toxicity, cancer
- Human toxicity, non-cancer
- Land use

Table 21. North American Impact Assessment Results over the ESL of 75 years

TRACI v2.1	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
GWP 100 [kg CO ₂ eq]	5.99E+00	2.59E-01	1.71E+00	3.05E+00	2.50E+00	2.56E+01	2.80E+01	1.31E-01	3.63E-01	6.76E+01	7.59E-03
ODP [kg CFC-11 eq]	2.15E-06	6.23E-08	2.67E-07	6.86E-07	3.93E-07	1.95E-06	7.22E-06	3.03E-08	1.66E-08	1.28E-05	8.13E-10
AP [kg SO ₂ eq]	2.44E-02	7.35E-04	7.13E-03	1.89E-02	1.19E-02	1.11E-01	1.29E-01	3.26E-04	1.09E-03	3.04E-01	1.68E-05
EP [kg N eq]	8.93E-03	1.15E-04	2.08E-03	1.76E-03	1.86E-03	7.28E-02	3.00E-02	5.66E-05	1.98E-04	1.18E-01	-1.37E-05
SFP [kg O ₃ eq]	2.92E-01	1.17E-02	6.97E-02	3.71E-01	1.14E-01	1.06E+00	1.75E+00	4.92E-03	9.44E-03	3.68E+00	-7.61E-05
ADP _{fossil} [MJ. LHV]	1.72E+01	5.64E-01	3.61E+00	6.23E+00	4.00E+00	3.42E+01	6.42E+01	2.75E-01	1.66E-01	1.30E+02	9.33E-03

These six impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes.

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 22. Environmental impacts over the ESL of 75 years – US

CML v4.3	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
GWP-total [kg CO2 eq.]	6.16E+00	2.61E-01	1.83E+00	3.08E+00	2.57E+00	2.61E+01	2.89E+01	1.32E-01	4.16E-01	6.95E+01	7.44E-03
GWP - fossil [kg CO2 eq.]	5.88E+00	2.60E-01	1.85E+00	3.08E+00	1.85E+00	2.47E+01	2.69E+01	1.32E-01	4.16E-01	6.51E+01	7.74E-03
GWP - biogenic [kg CO2 eq.]	-3.37E-02	9.97E-05	-2.39E-02	1.26E-03	6.86E-01	9.18E-02	1.26E+00	5.20E-05	4.06E-04	1.98E+00	-4.08E-05
GWP -luluc [kg de CO2 eq.]	3.17E-01	9.10E-05	2.28E-03	1.29E-03	3.26E-02	1.32E+00	7.07E-01	4.80E-05	2.42E-05	2.38E+00	-2.57E-04
ODP [kg CFC 11 eq]	2.14E-06	5.91E-08	2.54E-07	6.50E-07	3.82E-07	1.74E-06	7.05E-06	2.87E-08	1.57E-08	1.23E-05	7.43E-10
AP [mole H+ eq]	3.00E-02	8.75E-04	8.84E-03	2.19E-02	1.46E-02	1.40E-01	1.54E-01	3.85E-04	4.45E-04	3.71E-01	2.04E-05
EP- freshwater [kg PO4 eq]	2.65E-04	1.93E-06	3.87E-05	2.66E-05	6.36E-05	2.54E-03	7.96E-04	1.16E-06	8.51E-07	3.73E-03	-1.37E-06
EP- marine [kg N eq]	9.39E-03	1.85E-04	2.31E-03	5.85E-03	2.53E-03	6.29E-02	4.12E-02	7.80E-05	2.73E-04	1.25E-01	-1.47E-06
EP- terrestrial [mole N eq]	6.56E-02	2.06E-03	1.28E-02	6.48E-02	2.14E-02	3.27E-01	3.38E-01	8.69E-04	1.64E-03	8.34E-01	-3.03E-06
POCP [kg COVNM eq]	2.19E-02	7.32E-04	4.62E-03	1.87E-02	7.23E-03	6.90E-02	1.08E-01	3.24E-04	5.57E-04	2.31E-01	-5.85E-05
ADP-e [kg Sb eq]	1.47E-04	9.45E-07	5.63E-06	1.03E-05	2.60E-05	2.46E-04	3.81E-04	4.71E-07	1.71E-07	8.18E-04	8.23E-09
ADP-f [MJ, LHV]	1.37E+02	3.94E+00	2.80E+01	4.43E+01	3.29E+01	4.28E+02	4.99E+02	1.95E+00	1.21E+00	1.18E+03	6.06E-02
WDP [m3 of deprivation eq in the world]	7.54E+00	1.13E-02	3.53E-01	1.49E-01	1.42E+00	2.61E+01	1.91E+01	6.58E-03	5.21E-02	5.47E+01	-1.68E-04
Particulate matter [Incidence of disease]	2.82E-07	1.62E-08	7.56E-08	1.98E-07	9.82E-08	1.15E-06	1.37E-06	8.31E-09	8.38E-09	3.21E-06	3.32E-10
Ionising radiation [kBq235U éq]	2.47E-01	1.73E-02	9.88E-02	1.86E-01	9.27E-02	2.45E+00	1.31E+00	8.12E-03	4.73E-03	4.41E+00	-7.58E-04
Ecotoxicity, freshwater [CTUe]	2.46E+02	3.02E+00	2.53E+01	3.70E+01	4.91E+01	9.65E+02	7.59E+02	1.68E+00	1.78E+01	2.10E+03	1.09E-01
Human toxicity, cancer [CTUh]	5.80E-09	1.09E-10	1.19E-09	1.60E-09	2.18E-09	4.06E-08	2.19E-08	5.36E-11	4.38E-11	7.35E-08	-6.55E-12
Human toxicity, non-cancer [CTUh]	1.15E-07	2.93E-09	1.30E-08	3.22E-08	3.16E-08	4.70E-07	4.00E-07	1.50E-09	3.45E-09	1.07E-06	-8.07E-11
Land use [No dimension]	1.28E+02	3.97E+00	7.51E+01	4.03E+01	3.18E+01	1.29E+03	5.71E+02	1.98E+00	4.38E+00	2.14E+03	-1.52E+01



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 23. Environmental impacts over the ESL of 75 years – Norway

CML v4.3	A1	A2	A3	A4	A5	B2	B4	C2	C4	TOTAL LIFE CYCLE (A1-C4)	D
GWP-total [kg CO2 eq.]	6.16E+00	2.61E-01	1.83E+00	1.25E+00	2.41E+00	9.86E+00	4.48E+01	1.27E-01	1.04E+01	7.71E+01	-5.53E+00
GWP - fossil [kg CO2 eq.]	5.88E+00	2.60E-01	1.85E+00	1.25E+00	1.76E+00	8.46E+00	4.30E+01	1.27E-01	1.04E+01	7.29E+01	-5.52E+00
GWP - biogenic [kg CO2 eq.]	-3.37E-02	9.97E-05	-2.39E-02	4.75E-04	6.19E-01	8.89E-02	1.14E+00	4.88E-05	8.86E-03	1.80E+00	-5.99E-03
GWP -luluc [kg de CO2 eq.]	3.17E-01	9.10E-05	2.28E-03	4.45E-04	3.25E-02	1.31E+00	7.13E-01	4.34E-05	4.01E-03	2.38E+00	-1.28E-03
ODP [kg CFC 11 eq]	2.14E-06	5.91E-08	2.54E-07	2.83E-07	3.46E-07	1.03E-06	9.37E-06	2.88E-08	1.58E-06	1.51E-05	-9.59E-07
AP [mole H+ eq]	3.00E-02	8.75E-04	8.84E-03	4.89E-03	1.29E-02	8.28E-02	1.48E-01	3.53E-04	1.61E-02	3.05E-01	-2.67E-02
EP- freshwater [kg PO4 eq]	2.65E-04	1.93E-06	3.87E-05	9.17E-06	6.16E-05	1.10E-03	1.04E-03	9.50E-07	1.43E-04	2.66E-03	-1.58E-05
EP- marine [kg N eq]	9.39E-03	1.85E-04	2.31E-03	1.06E-03	2.05E-03	5.54E-02	3.72E-02	7.18E-05	3.55E-03	1.11E-01	-2.54E-03
EP- terrestrial [mole N eq]	6.56E-02	2.06E-03	1.28E-02	1.18E-02	1.67E-02	2.42E-01	2.98E-01	7.98E-04	3.91E-02	6.88E-01	-2.80E-02
POCP [kg COVNM eq]	2.19E-02	7.32E-04	4.62E-03	3.99E-03	5.87E-03	4.38E-02	9.57E-02	3.06E-04	1.05E-02	1.87E-01	-9.53E-03
ADP-e [kg Sb eq]	1.47E-04	9.45E-07	5.63E-06	4.48E-06	2.54E-05	2.35E-04	4.44E-04	4.66E-07	3.79E-05	9.01E-04	-6.93E-06
ADP-f [MJ, LHV]	1.37E+02	3.94E+00	2.80E+01	1.88E+01	3.03E+01	1.76E+02	5.11E+02	1.92E+00	3.50E+01	9.42E+02	-7.84E+01
WDP [m3 of deprivation eq in the world]	7.54E+00	1.13E-02	3.53E-01	5.36E-02	1.41E+00	2.36E+01	2.39E+01	5.56E-03	2.61E+00	5.96E+01	-2.09E-01
Particulate matter [Incidence of disease]	2.82E-07	1.62E-08	7.56E-08	7.71E-08	8.64E-08	7.82E-07	1.35E-06	7.98E-09	1.28E-07	2.80E-06	-2.11E-07
Ionising radiation [kBq235U éq]	2.47E-01	1.73E-02	9.88E-02	8.27E-02	8.25E-02	4.24E-01	1.38E+00	8.45E-03	1.51E-01	2.49E+00	-2.37E-01
Ecotoxicity, freshwater [CTUe]	2.46E+02	3.02E+00	2.53E+01	1.44E+01	4.70E+01	7.12E+02	2.00E+03	1.48E+00	6.63E+02	3.71E+03	-2.56E+01
Human toxicity, cancer [CTUh]	5.80E-09	1.09E-10	1.19E-09	5.28E-10	2.19E-09	3.72E-08	2.72E-08	5.24E-11	3.70E-09	7.80E-08	-1.50E-09
Human toxicity, non-cancer [CTUh]	1.15E-07	2.93E-09	1.30E-08	1.39E-08	3.01E-08	3.71E-07	6.62E-07	1.44E-09	1.54E-07	1.36E-06	-1.94E-08
Land use [No dimension]	1.28E+02	3.97E+00	7.51E+01	1.87E+01	2.95E+01	1.20E+03	5.51E+02	1.97E+00	1.81E+01	2.03E+03	-2.02E+01



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 24. Environmental impacts over the ESL of 75 years – Europe

CML v4.3	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
GWP-total [kg CO2 eq.]	6.16E+00	2.61E-01	1.83E+00	1.17E+00	2.36E+00	2.16E+01	3.03E+01	1.27E-01	3.22E+00	6.70E+01	-2.50E+00
GWP - fossil [kg CO2 eq.]	5.88E+00	2.60E-01	1.85E+00	1.17E+00	1.66E+00	2.01E+01	2.84E+01	1.27E-01	3.22E+00	6.26E+01	-2.49E+00
GWP - biogenic [kg CO2 eq.]	-3.37E-02	9.97E-05	-2.39E-02	4.50E-04	6.59E-01	1.41E-01	1.21E+00	4.88E-05	2.54E-03	1.96E+00	-6.23E-03
GWP -luluc [kg de CO2 eq.]	3.17E-01	9.10E-05	2.28E-03	4.05E-04	3.25E-02	1.34E+00	7.07E-01	4.34E-05	1.14E-03	2.40E+00	-2.44E-03
ODP [kg CFC 11 eq]	2.14E-06	5.91E-08	2.54E-07	2.66E-07	3.44E-07	1.63E-06	7.09E-06	2.88E-08	4.56E-07	1.23E-05	-3.13E-07
AP [mole H+ eq]	3.00E-02	8.75E-04	8.84E-03	3.55E-03	1.27E-02	1.47E-01	1.22E-01	3.53E-04	4.81E-03	3.31E-01	-1.27E-02
EP- freshwater [kg PO4 eq]	2.65E-04	1.93E-06	3.87E-05	8.74E-06	6.17E-05	2.37E-03	8.36E-04	9.50E-07	4.08E-05	3.63E-03	-1.11E-04
EP- marine [kg N eq]	9.39E-03	1.85E-04	2.31E-03	7.38E-04	1.99E-03	6.38E-02	3.17E-02	7.18E-05	1.19E-03	1.11E-01	-1.39E-03
EP- terrestrial [mole N eq]	6.56E-02	2.06E-03	1.28E-02	8.20E-03	1.57E-02	3.37E-01	2.35E-01	7.98E-04	1.21E-02	6.89E-01	-1.56E-02
POCP [kg COVNM eq]	2.19E-02	7.32E-04	4.62E-03	3.03E-03	5.64E-03	7.01E-02	7.90E-02	3.06E-04	3.32E-03	1.89E-01	-4.83E-03
ADP-e [kg Sb eq]	1.47E-04	9.45E-07	5.63E-06	4.28E-06	2.54E-05	2.55E-04	3.90E-04	4.66E-07	1.08E-05	8.39E-04	-2.66E-06
ADP-f [MJ, LHV]	1.37E+02	3.94E+00	2.80E+01	1.78E+01	3.02E+01	4.26E+02	4.60E+02	1.92E+00	1.07E+01	1.12E+03	-4.25E+01
WDP [m3 of deprivation eq in the world]	7.54E+00	1.13E-02	3.53E-01	5.11E-02	1.41E+00	2.56E+01	2.02E+01	5.56E-03	7.40E-01	5.59E+01	-2.14E-01
Particulate matter [Incidence of disease]	2.82E-07	1.62E-08	7.56E-08	7.35E-08	8.54E-08	9.23E-07	1.17E-06	7.98E-09	4.16E-08	2.67E-06	-6.93E-08
Ionising radiation [kBq235U eq]	2.47E-01	1.73E-02	9.88E-02	7.80E-02	8.23E-02	2.47E+00	1.16E+00	8.45E-03	4.64E-02	4.20E+00	-2.37E-01
Ecotoxicity, freshwater [CTUe]	2.46E+02	3.02E+00	2.53E+01	1.36E+01	4.66E+01	8.37E+02	1.07E+03	1.48E+00	2.00E+02	2.44E+03	-1.71E+01
Human toxicity, cancer [CTUh]	5.80E-09	1.09E-10	1.19E-09	4.87E-10	2.08E-09	3.99E-08	2.16E-08	5.24E-11	1.07E-09	7.22E-08	-6.31E-10
Human toxicity, non-cancer [CTUh]	1.15E-07	2.93E-09	1.30E-08	1.33E-08	2.95E-08	4.72E-07	4.43E-07	1.44E-09	4.60E-08	1.14E-06	-1.34E-08
Land use [No dimension]	1.28E+02	3.97E+00	7.51E+01	1.81E+01	2.95E+01	1.27E+03	5.30E+02	1.97E+00	8.23E+00	2.07E+03	-2.20E+01



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

4.2. Life Cycle Inventory Results

Table 25. Resources, waste categories and outgoing flows over the ESL of 75 years – US

Parameter	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
RPRE [MJ, LHV]	1.48E+01	5.33E-02	1.42E+01	5.66E-01	6.95E+00	1.70E+02	7.31E+01	2.25E-02	2.12E-02	2.79E+02	-2.09E+00
RPRM [MJ, LHV]	6.41E-01	-	5.78E+00	-	-2.56E+00	-	7.73E+00	-	-	1.16E+01	-
RPRT [MJ, LHV]	1.54E+01	5.33E-02	2.00E+01	5.66E-01	4.40E+00	1.70E+02	8.09E+01	2.25E-02	2.12E-02	2.91E+02	-2.09E+00
NRPRE [MJ, LHV]	9.27E+01	3.94E+00	2.65E+01	4.43E+01	1.94E+01	3.29E+02	3.80E+02	1.95E+00	1.21E+00	8.99E+02	6.05E-02
NRPRM [MJ, LHV]	4.69E+01	-	1.44E+00	-	1.37E+01	1.04E+02	1.24E+02	-	-	2.90E+02	-
NRPRRT [MJ, LHV]	1.40E+02	3.94E+00	2.80E+01	4.43E+01	3.31E+01	4.33E+02	5.04E+02	1.95E+00	1.21E+00	1.19E+03	6.05E-02
SM [kg]	1.74E+00	-	1.94E-01	-	1.94E-01	-	4.26E+00	-	-	6.40E+00	-
RSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
NRSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
FW [m3]	1.59E-01	5.34E-04	1.86E-02	7.03E-03	3.55E-02	2.09E+00	4.44E-01	3.02E-04	1.35E-03	2.76E+00	-5.65E-05
HWD [kg]	2.66E-01	2.72E-03	3.30E-02	4.78E-02	1.28E-01	1.18E+00	9.61E-01	1.86E-03	1.57E-03	2.62E+00	1.69E-04
NHWD [kg]	2.81E+00	2.21E-01	9.14E-01	2.21E+00	1.85E+00	1.49E+01	2.60E+01	1.13E-01	4.86E+00	5.38E+01	7.48E-03
HLRW [kg]	3.86E-05	3.00E-07	1.23E-05	2.62E-06	9.77E-06	2.97E-04	1.28E-04	1.04E-07	1.09E-07	4.88E-04	-8.56E-08
ILLRW [kg]	1.90E-04	2.67E-05	1.24E-04	2.89E-04	9.90E-05	1.21E-03	1.50E-03	1.27E-05	7.10E-06	3.46E-03	-1.37E-07
CRU [kg]	-	-	-	-	-	-	-	-	-	-	-
MFR [kg]	-	-	4.00E-02	-	1.52E-01	-	3.84E-01	-	-	5.76E-01	-
MER [kg]	-	-	-	-	-	-	-	-	-	-	-
EE [MJ, LHV]	-	-	1.98E-01	-	4.01E-01	-	1.20E+00	-	-	1.80E+00	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 26. Resources, waste categories and outgoing flows over the ESL of 75 years – Norway

Parameter	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
RPRE [MJ, LHV]	1.48E+01	5.33E-02	1.42E+01	2.53E-01	9.63E+00	2.64E+02	8.58E+01	2.63E-02	3.98E+00	3.93E+02	-3.60E+01
RPRM [MJ, LHV]	6.41E-01	-	5.78E+00	-	-5.26E+00	-	2.31E+00	-	-	3.47E+00	-
RPRT [MJ, LHV]	1.54E+01	5.33E-02	2.00E+01	2.53E-01	4.37E+00	2.64E+02	8.81E+01	2.63E-02	3.98E+00	3.96E+02	-3.60E+01
NRPRE [MJ, LHV]	9.27E+01	3.94E+00	2.65E+01	1.88E+01	1.80E+01	7.71E+01	5.80E+02	1.92E+00	1.28E+02	9.47E+02	-7.83E+01
NRPRM [MJ, LHV]	4.69E+01	-	1.44E+00	-	1.25E+01	1.04E+02	-6.45E+01	-	-9.31E+01	6.95E+00	-
NRPRT [MJ, LHV]	1.40E+02	3.94E+00	2.80E+01	1.88E+01	3.05E+01	1.81E+02	5.16E+02	1.92E+00	3.49E+01	9.54E+02	-7.83E+01
SM [kg]	1.74E+00	-	1.94E-01	-	1.94E-01	-	4.26E+00	-	-	6.40E+00	-
RSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
NRSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
FW [m3]	1.59E-01	5.34E-04	1.86E-02	2.53E-03	3.52E-02	1.98E+00	6.12E-01	2.63E-04	9.02E-02	2.90E+00	-2.52E-01
HWD [kg]	2.66E-01	2.72E-03	3.30E-02	1.30E-02	1.29E-01	8.12E-01	1.97E+00	1.32E-03	5.40E-01	3.77E+00	-1.92E-02
NHWD [kg]	2.81E+00	2.21E-01	9.14E-01	1.04E+00	1.54E+00	8.10E+00	1.84E+01	1.09E-01	2.57E+00	3.57E+01	-4.15E-01
HLRW [kg]	3.86E-05	3.00E-07	1.23E-05	1.42E-06	9.67E-06	4.12E-05	1.69E-04	1.48E-07	2.22E-05	2.95E-04	-5.50E-06
ILLRW [kg]	1.90E-04	2.67E-05	1.24E-04	1.27E-04	8.27E-05	3.19E-04	1.36E-03	1.30E-05	1.17E-04	2.36E-03	-3.21E-04
CRU [kg]	-	-	-	-	-	-	-	-	-	-	-
MFR [kg]	-	-	4.00E-02	-	4.00E-03	-	8.80E-02	-	-	1.32E-01	-
MER [kg]	-	-	-	-	-	-	-	-	-	-	-
EE [MJ, LHV]	-	-	1.98E-01	-	2.21E+00	-	6.83E+01	-	3.17E+01	1.02E+02	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 27. Resources, waste categories and outgoing flows over the ESL of 75 years – Europe

Parameter	A1	A2	A3	A4	A5	B2	B4	C2	C4	Total life cycle (A1-C4)	D
RPRE [MJ, LHV]	1.48E+01	5.33E-02	1.42E+01	2.42E-01	7.90E+00	1.88E+02	7.67E+01	2.63E-02	1.16E+00	3.03E+02	-5.42E+00
RPRM [MJ, LHV]	6.41E-01	-	5.78E+00	-	-3.53E+00	-	5.78E+00	-	-	8.68E+00	-
RPRT [MJ, LHV]	1.54E+01	5.33E-02	2.00E+01	2.42E-01	4.37E+00	1.88E+02	8.25E+01	2.63E-02	1.16E+00	3.12E+02	-5.42E+00
NRPRE [MJ, LHV]	9.27E+01	3.94E+00	2.65E+01	1.77E+01	1.74E+01	3.23E+02	3.95E+02	1.92E+00	3.70E+01	9.15E+02	-4.21E+01
NRPRM [MJ, LHV]	4.69E+01	-	1.44E+00	-	1.30E+01	1.04E+02	7.01E+01	-	-2.63E+01	2.09E+02	-
NRPRT [MJ, LHV]	1.40E+02	3.94E+00	2.80E+01	1.77E+01	3.04E+01	4.26E+02	4.65E+02	1.92E+00	1.07E+01	1.12E+03	-4.21E+01
SM [kg]	1.74E+00	-	1.94E-01	-	1.94E-01	-	4.26E+00	-	-	6.40E+00	-
RSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
NRSF [MJ, LHV]	-	-	-	-	-	-	-	-	-	-	-
FW [m3]	1.59E-01	5.34E-04	1.86E-02	2.42E-03	3.50E-02	1.29E+00	4.84E-01	2.63E-04	2.65E-02	2.02E+00	-1.76E-02
HWD [kg]	2.66E-01	2.72E-03	3.30E-02	1.22E-02	1.24E-01	1.05E+00	1.18E+00	1.32E-03	1.53E-01	2.82E+00	-2.38E-02
NHWD [kg]	2.81E+00	2.21E-01	9.14E-01	1.00E+00	1.65E+00	1.07E+01	2.18E+01	1.09E-01	4.21E+00	4.34E+01	-3.19E-01
HLRW [kg]	3.86E-05	3.00E-07	1.23E-05	1.36E-06	9.70E-06	4.08E-04	1.38E-04	1.48E-07	6.37E-06	6.15E-04	-3.22E-05
ILLRW [kg]	1.90E-04	2.67E-05	1.24E-04	1.20E-04	8.22E-05	1.68E-03	1.19E-03	1.30E-05	3.80E-05	3.46E-03	-2.02E-04
CRU [kg]	-	-	-	-	-	-	-	-	-	-	-
MFR [kg]	-	-	4.00E-02	-	2.19E-01	-	5.19E-01	-	-	7.78E-01	-
MER [kg]	-	-	-	-	-	-	-	-	-	-	-
EE [MJ, LHV]	-	-	1.98E-01	-	4.30E-01	-	1.92E+01	-	8.97E+00	2.88E+01	-



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Table 28. Carbon Emissions and Removals over the ESL of 75 years

PARAMETER	A1	A2	A3	A4	A5	B1	B2	B4	C2	C4	TOTAL LIFE CYCLE (A1-C4)
BCRP [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-
BCEP [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-
BCRK [kg CO ₂]	-	-	6.26E-01	-	-	-	-	1.25E+00	-	-	1.88E+00
BCEK [kg CO ₂]	-	-	-	-	6.26E-01	-	-	1.25E+00	-	-	1.88E+00
BCEW [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-
CCE [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-
CCR [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-
CWNR [kg CO ₂]	-	-	-	-	-	-	-	-	-	-	-

BCRP: Biogenic Carbon Removal from Product / BCEP: Biogenic Carbon Emission from Product / BCRK: Biogenic Carbon Removal from Packaging / BCEK: Biogenic Carbon Emission from Packaging / BCEW: Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes / CCE: Calcination Carbon Emissions / CCR: Carbonation Carbon Removals / CWNR: Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes



ENVIRONMENTAL PRODUCT DECLARATION




Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

5. LCA Interpretation

Figure 10: Graph depicting the impact indicators as calculated by the TRACI method

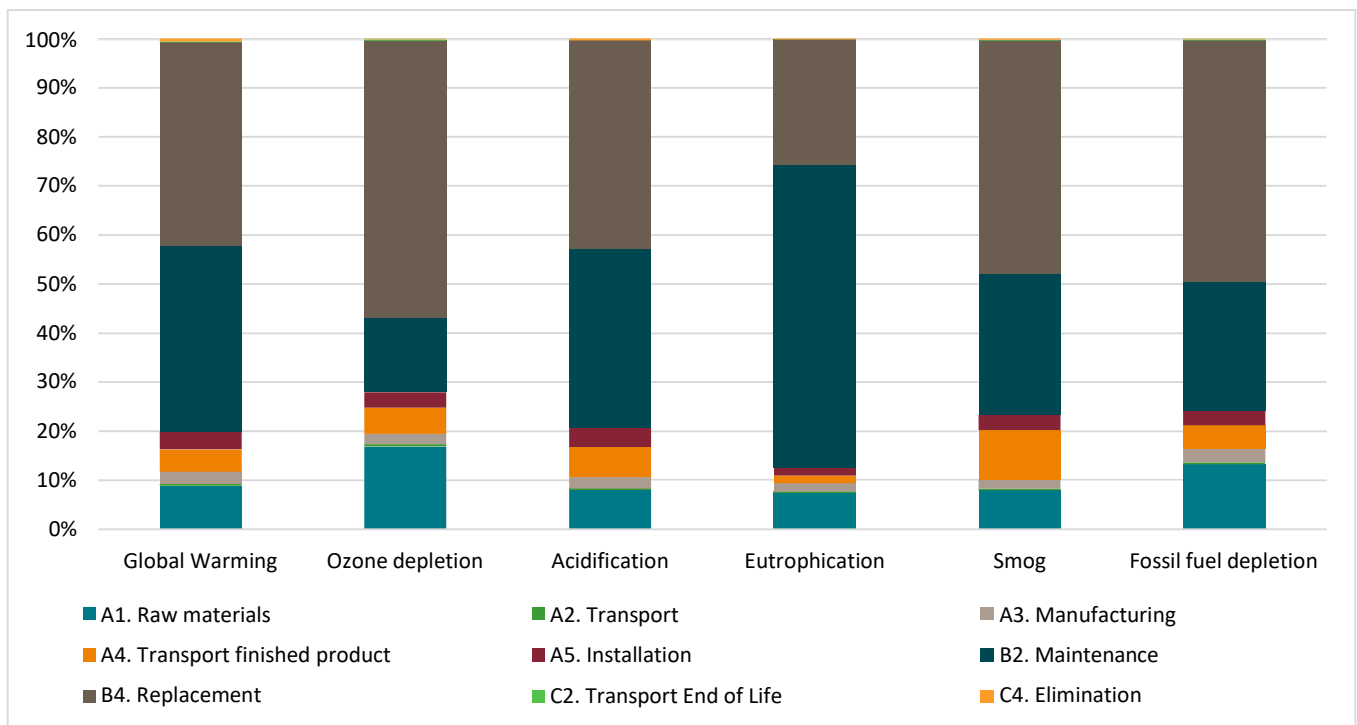

ENVIRONMENTAL PRODUCT DECLARATION




Tarafflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Figure 11: Graph depicting selection of impact indicator results calculated according to EN 15804 – US

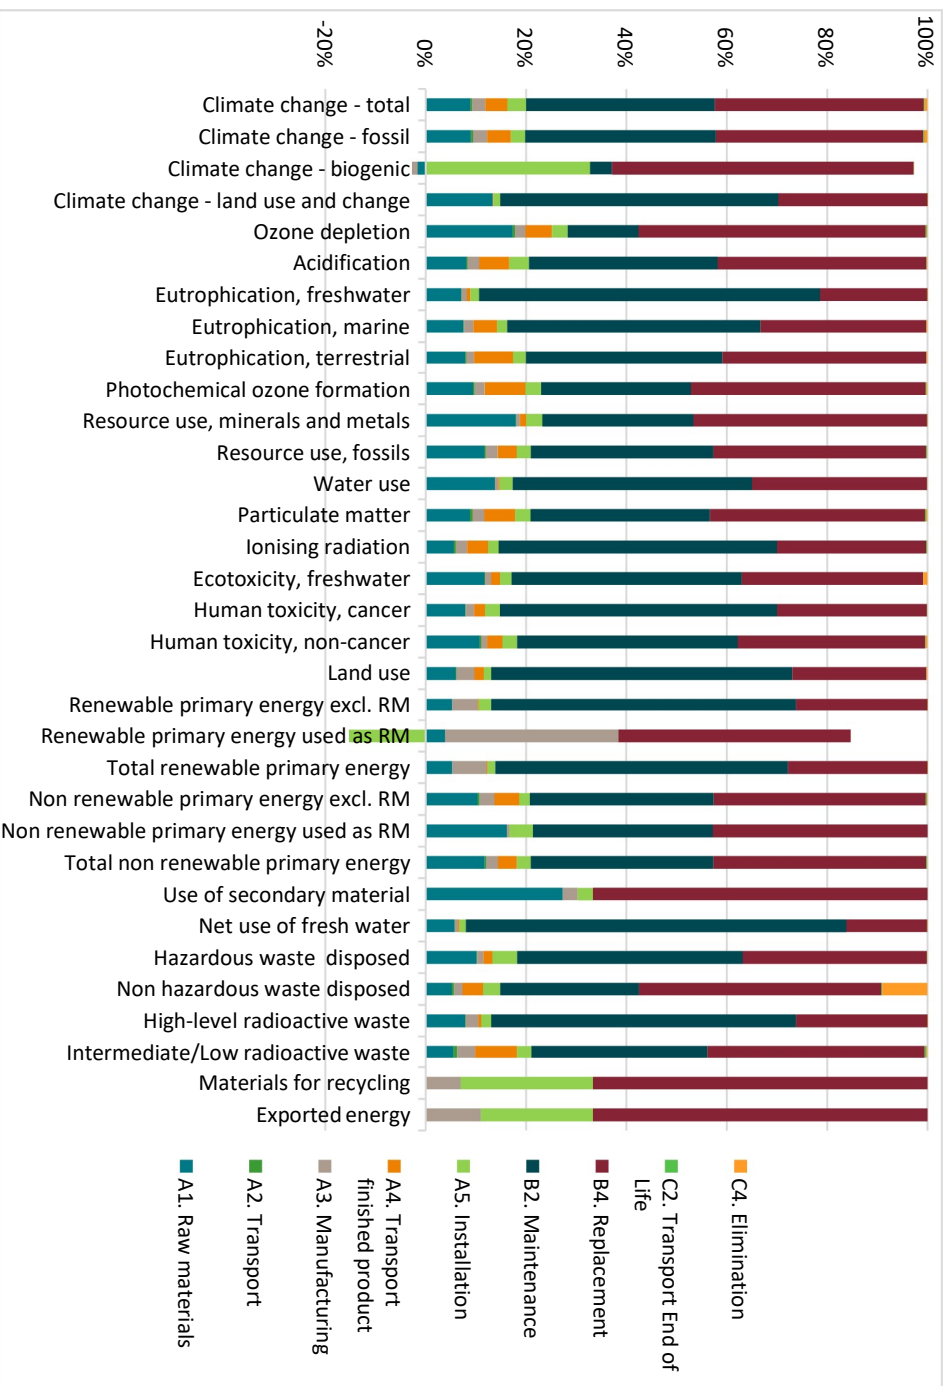

ENVIRONMENTAL PRODUCT DECLARATION




Tarafflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

Figure 12: Graph depicting selection of impact indicator results calculated according to EN 15804 – Norway

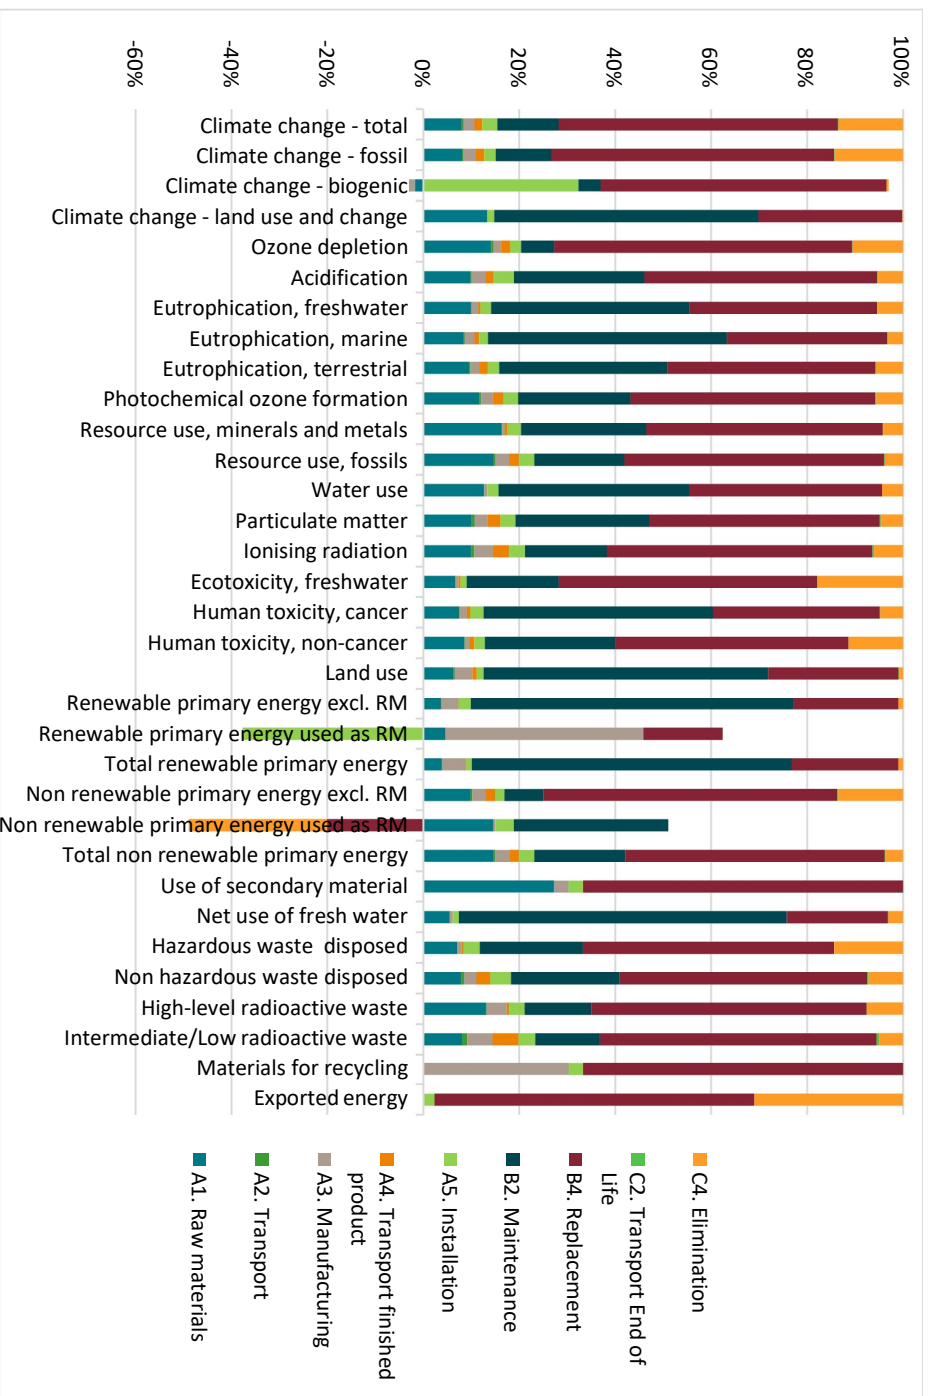


ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection

According to ISO 14025,
EN 15804

Figure 13: Graph depicting selection of impact indicator results calculated according to EN 15804 – Europe

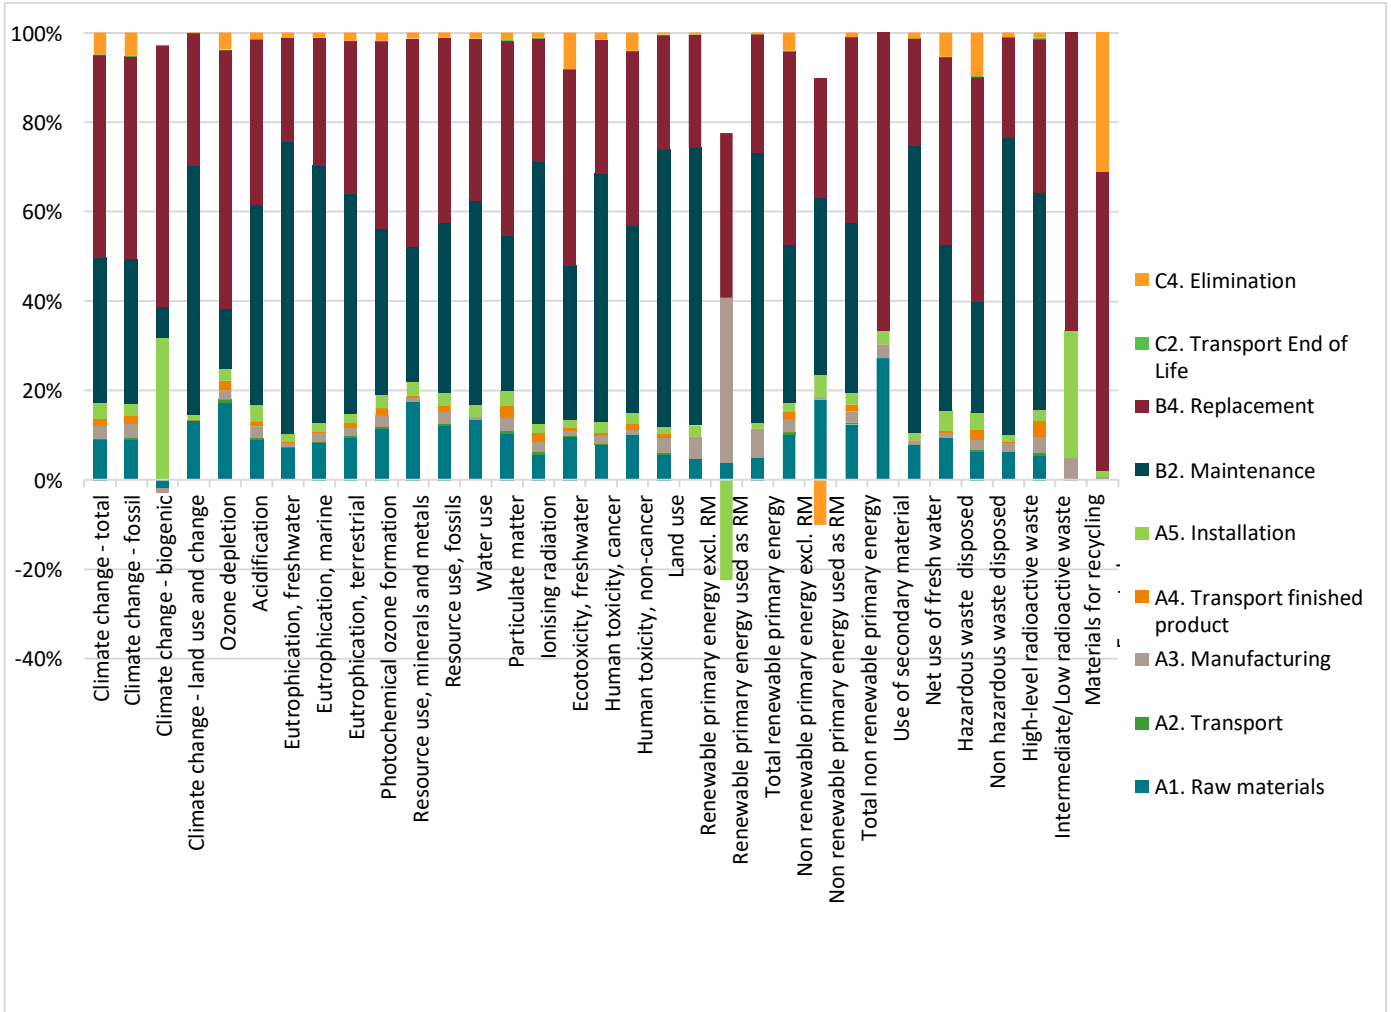

The primary contributor to the environmental impacts of the product is B4 – Replacement, which requires the production of two additional products and A1 – Extraction and transformation of the raw materials is impactful. Then comes B2 – Maintenance stage because of the scenario of both long reference service life (RSL) of 75 years and the assumption of a weekly cleaning by using a machine and detergent. Stages A3 – Manufacturing and C4 – End of life (for Norway and Europe) have the following greatest impacts.



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

6. Additional Environmental Information

6.1. Environment and Health During Manufacturing

Gerflor's factory conforms to the ISO 14001 Environmental Management System and the ISO 50001 Energy Management System.

Gerflor uses 100% certified renewable electricity in its plants.

No substances required to be reported as hazardous are associated with the production of this product.

6.2. Environment and Health During Installation

The manufacturer's guidelines should be adhered to during the installation of this product.

6.3. Environment and Health During the use stage

The product is certified FloorScore. The measured concentration of total volatile organic compounds (TVOC) is less than/equal to 0.5 mg/m³ (in accordance with CDPH/EHLB Standard Method v1.2-2017).

The product is not exposed to soil and water during the use stage.

6.4. Extraordinary Effects

Fire

Fire behaviour have been tested according to EN 13501-1.

There's no test available for possible environmental impacts during fire.

Class 1 when tested in accordance with ASTM E 648. Standard Test Method for Critical Radiant Flux

Flaming & Non-Flaming when tested in accordance with ASTM E 662. Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials

Water

There's no test available for possible impacts following unforeseeable influence of water.

Mechanical Destruction

Mechanical damage does not chemically alter the product.

6.5. Delayed Emissions

No delayed emissions are taken into account.

ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

6.6. Environmental Activities and Certifications



FloorScore®

Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0

Registration
SCS-FS-02145



M1 Standard
Certificate n°2250

6.7. Further Information

Additional information can be found in <https://www.gerflor.com/>

7. Supporting Documentation

All documentation necessary to confirm the data provided in this EPD has been submitted to the critical reviewer.

8. References

ISO 14025

ISO 14025:2006 : Environmental labels and declarations — Type III environmental declarations — Principles and procedures

EN 15804

EN 15804:2012-04+A2 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

UL Environment

UL Environment General Program Instructions March 2022. version 2.7

UL Standard 10010. PCR Part A

PCR -Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0. March 2022. UL Environment.
<https://industries.ul.com/environment>

UL 10010-7. PCR Part B

PCR - Part B: Flooring EPD Requirements. Second Edition. Dated September 28. 2018. UL Environment.

Environment



ENVIRONMENTAL PRODUCT DECLARATION



Taraflex
Sports Flooring Collection



According to ISO 14025,
EN 15804

<https://www.ul.com/>

Ecoinvent V3.7.1

ecoinvent Life Cycle Inventory database Version 3.7.1
<http://www.ecoinvent.org>

9. Contact information

	Publisher UL ENVIRONMENT 333 Pfingsten Road 60611 Northbrook US	Mail Epd@ul.com Web https://www.ul.com/ https://spot.ul.com
	Author of the Life Cycle Assessment EVEA 14 rue de la tour d'Auvergne 44200 Nantes France	Tel +33 (0)2 28 07 87 00 Mail info@evea-conseil.com Web www.evea-conseil.com
	Owner of the Declaration Gerflor 50 cours de la République. 69100 Villeurbanne France	Tel +33 (0)475506750 Mail philippe.magro@gerflor.com Web http://www.gerflorusa.com

