

CREATION

CLIC

Gerflor[®]
theflooringgroup

DESIGN AND STYLE. MADE IN FRANCE.



We're passionate about great design. And we're committed to the success of those we work with. Gerflor stylist directors collaborate closely with you to identify the latest trends in fashion, interior design, architecture and the visual arts that will translate into new Gerflor designs. Across every environment and application, we provide designers with exceptional flooring to create spaces that are beautiful, safe, comfortable and sustainable. From consultation to installation to responsive service throughout the floor's lifecycle, Gerflor is with you at every step.





Fewer repeated planks

Creation Clic designs are printed on 6' 6" (2 m) wide film, allowing for less repeated plank patterns. There is no repeated pattern per box.

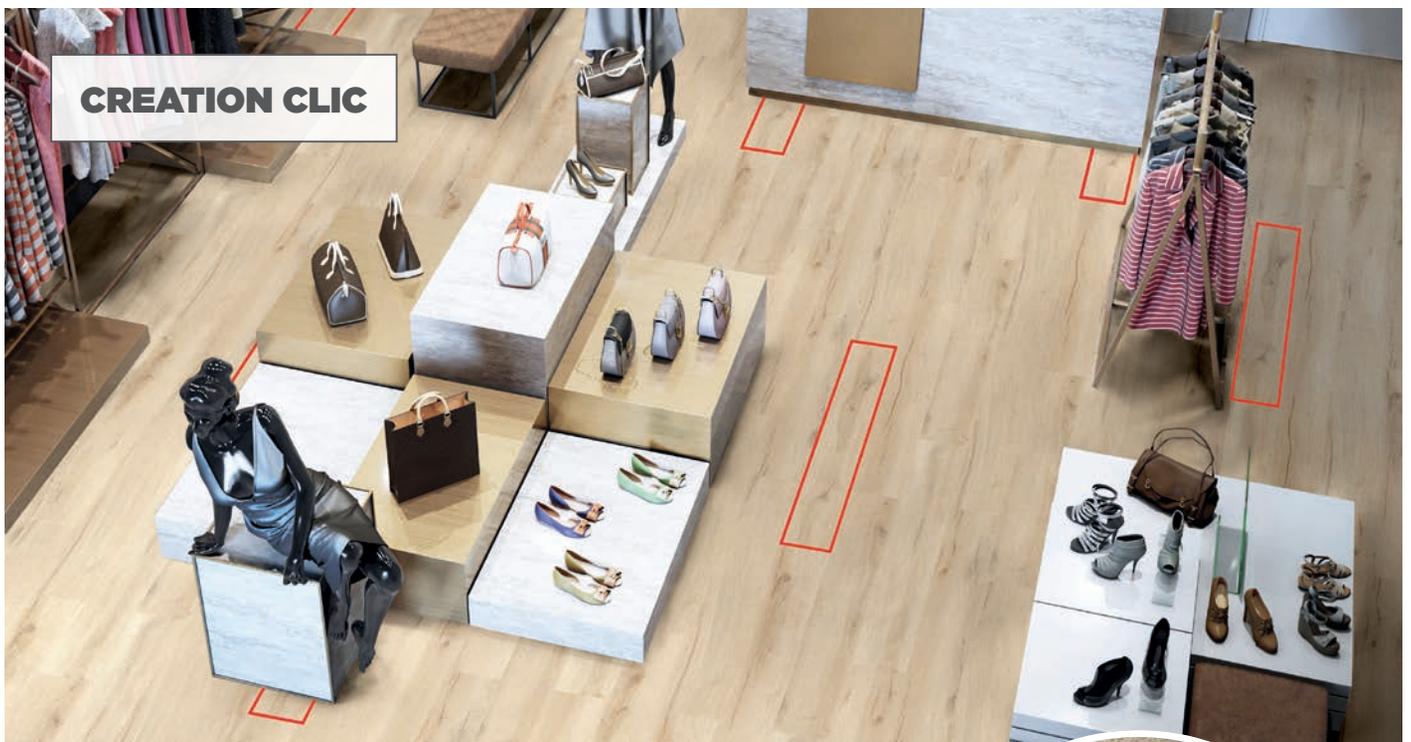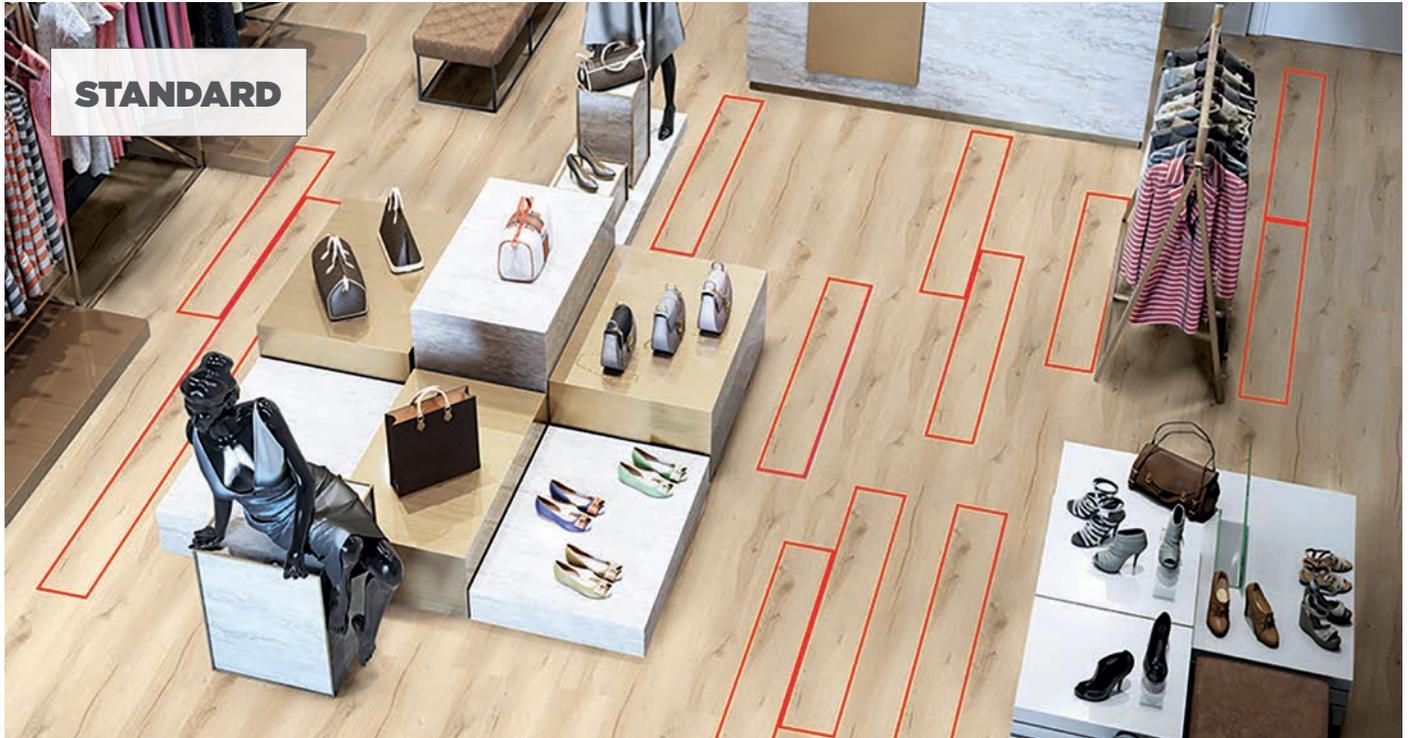

Non-glare surface treatment

The new PUR+ Matte polyurethane finish eliminates the glare associated with resilient flooring, allowing for visuals that are far more authentic than industry standards.

Standard varnish
PUR+ MATTE VARNISH



Discover additional designs in our Creation Clic Lookbook.



0848 SWISS OAK BEIGE CC22

 8.4" x 48.8" 



0441 HONEY OAK CC22

 8.4" x 48.8" 



0853 BOSTONIAN OAK BEIGE CC22

 8.4" x 48.8" 



0846 SWISS OAK PEARL CC22

 8.4" x 48.8" 

Visit gerflorusa.com for stocking program.



0848 SWISS OAK BEIGE



0846 SWISS OAK PEARL




0441 HONEY OAK



0853 BOSTONIAN OAK BEIGE



0448 MALUA BAY

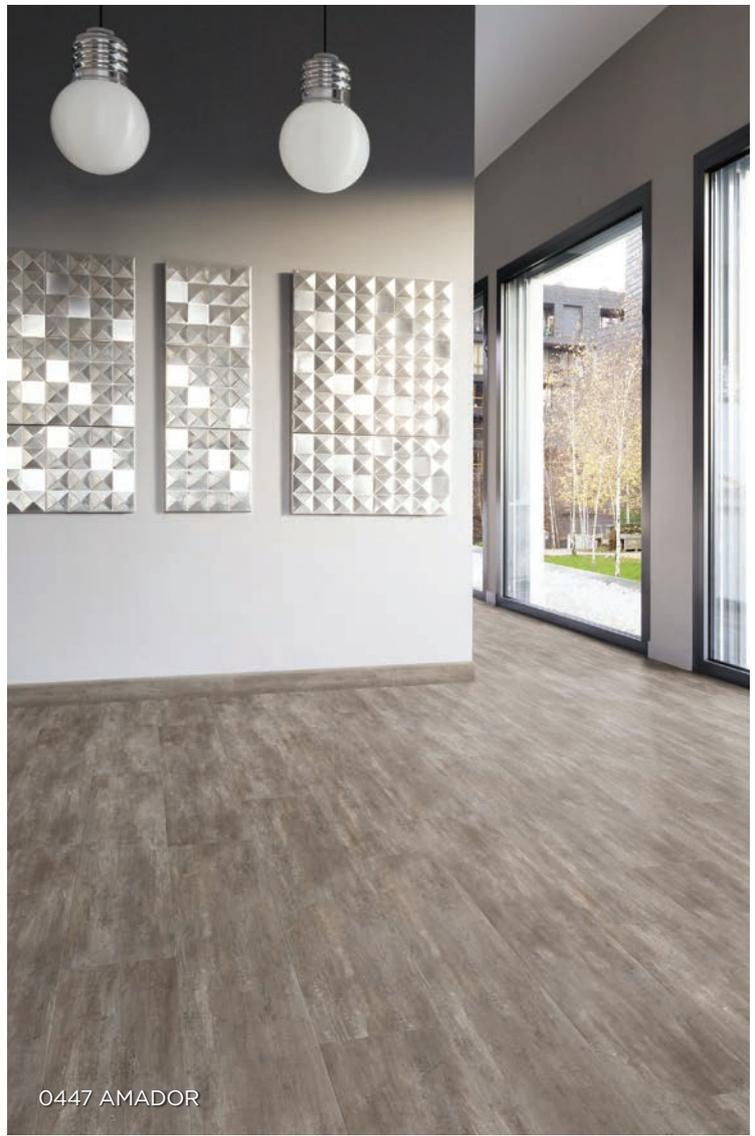

0447 AMADOR




0458 ASPEN

CREATION CLIC²⁸

6 mm thick with a 28 mil transparent wearlayer designed to stand up to the highest traffic in commercial and retail, such as supermarkets and convenience stores.

CREATION CLIC²²

5 mm thick with a 22 mil wearlayer ideal for commercial applications, such as corporate office spaces, multi-living buildings, boutiques and hospitality.

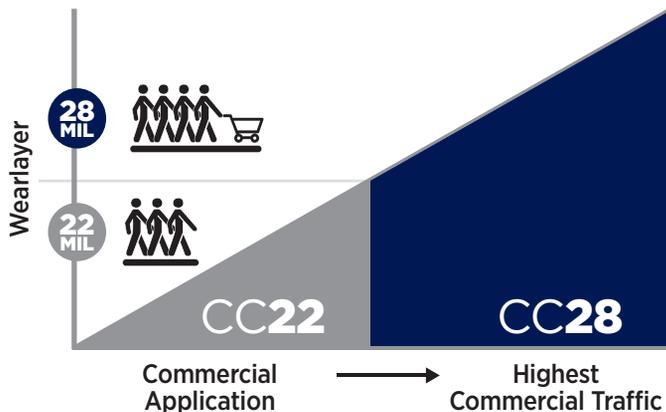

O448 MALUA BAY CC22

8.4" x 48.8"



O458 ASPEN CC22

8.4" x 48.8"




O447 AMADOR CC22

8.4" x 48.8"

Visit gerflorusa.com for stocking program.



1056 ONKA PEARL

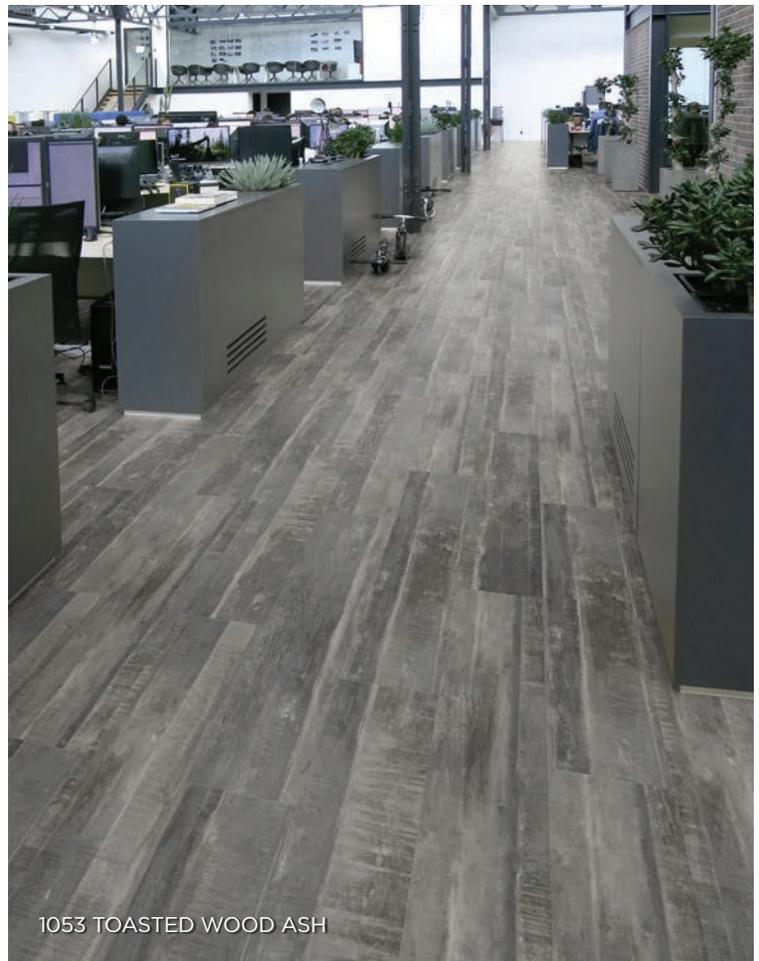


1053 TOASTED WOOD ASH




0085 DOCK GREY



0087 DOCK TAUPE

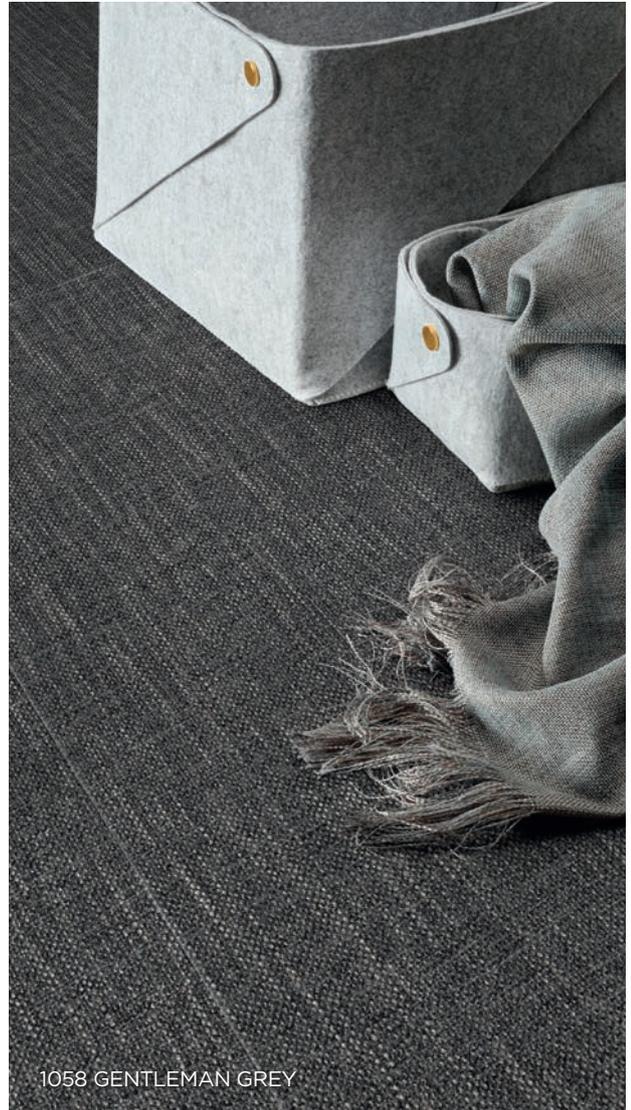


1058 GENTLEMAN GREY

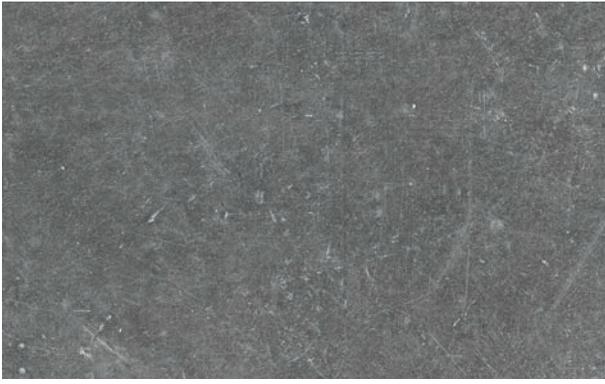

0085 DOCK GREY CC28

15.4" x 28.7" 

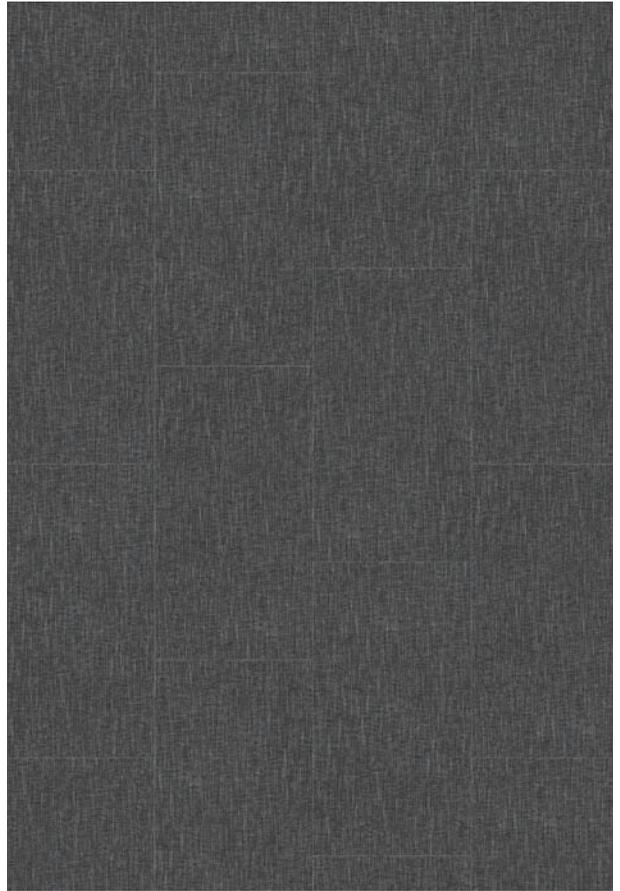

1058 GENTLEMAN GREY CC28

15.4" x 28.7" 




0087 DOCK TAUPE CC28

15.4" x 28.7" 



1056 ONKA PEARL CC28

9.5" x 57.5" 

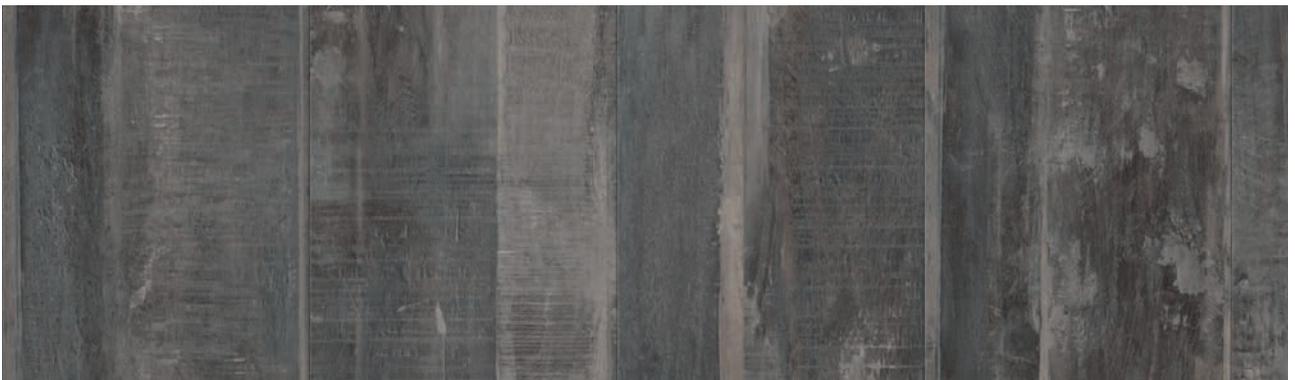

1053 TOASTED WOOD ASH CC28

9.5" x 57.5" 

Visit gerflorusa.com for stocking program.



0357 PORTOBELLO **CC28**
0456 RANCH **CC22**

 8.4" x 48.8" 



0359 WILD OAK **CC28**
0457 BUFFALO **CC22**

 8.4" x 48.8" 



0799 TOASTED WOOD CAFE **CC28**

 9.5" x 57.5" 

Visit gerflorusa.com for stocking program.



0357 PORTOBELLO
0456 RANCH



0799 TOASTED WOOD CAFE



0359 WILD OAK
0457 BUFFALO

THE MOST SUSTAINABLE LVT MANUFACTURING PROCESS



Creation Clic LVT is manufactured in the south of France in Provence. Surrounded by olive groves and lavender fields, this low-impact, state-of-the-art facility reflects our continuing commitment to sustainable and responsible practices in all steps of our products' life cycles.



55% RECYCLED CONTENT




Recycled Center (post industrial & installation waste)

LOWEST CARBON FOOTPRINT
CO₂ emissions/m²
10 times lower than standard process



Gravitational & Low energy Process

BEST PRODUCT DIMENSIONAL STABILITY



Integrated process, no stop & go

PATENTED PROCESS



CREATION CLIC: ACTIONS SPEAK LOUDER THAN WORDS



WELLNESS

- Naturally bacteriostatic to limit the spread of infections
- ISO 22196 certified at >99%
- Impact Insulation Class (IIC) up to 49 dB
- 15 dB noise reduction compared to Rigid Core



INDOOR AIR QUALITY

- Extremely low VOC emissions—less than 10µg/m³, 50 times better than industry standards
- FloorScore® certified
- Minimal adhesive required
- No wax maintenance



LIFE CYCLE ANALYSIS

- Third party certified product-specific Type III EPD
- Installs over existing floor reducing landfill waste
- Made in an ISO 14001 and 9001 certified manufacturing plant



RAW MATERIALS

- 100% REACH compliant
- NO formaldehyde, NO heavy metals, NO solvents



RECYCLED CONTENT

- 55% post-manufacturing recycled content
- REACH compliant recycled content



INSPIRING,
EASY-TO-INSTALL
FLOORS

ARE JUST A CLIC AWAY


Get inspired and reimagine. Visit the
Room Visualizer and Clic to create your vision:
gerflorusa.com > Design Tools > Room Visualizer.



0577 ALBION



0800 TOASTED WOOD ROADSTER

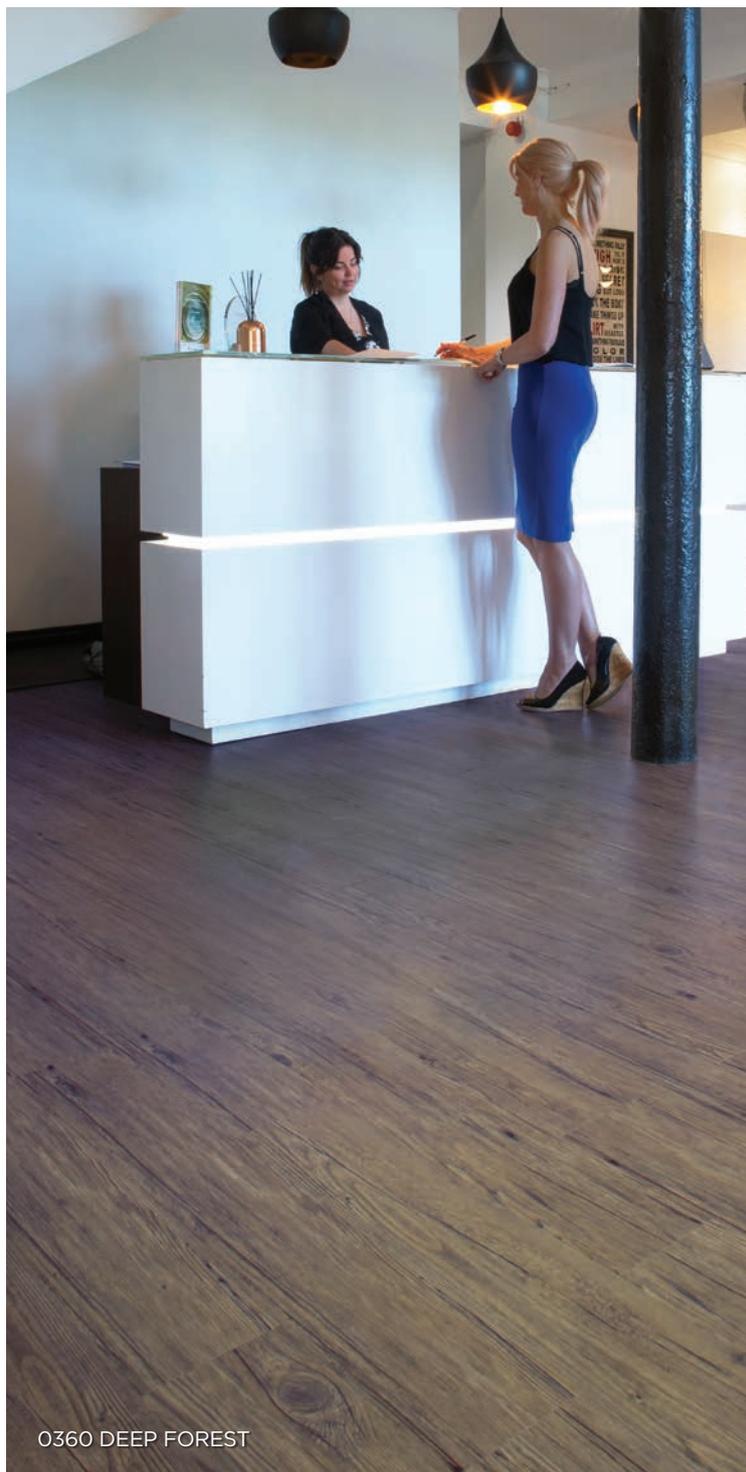

0360 DEEP FOREST



0798 CERVINO OAK NATURE




0798 CERVINO OAK NATURE CC28

 9.5" x 57.5" 



0577 ALBION CC28

 8.4" x 48.8" 

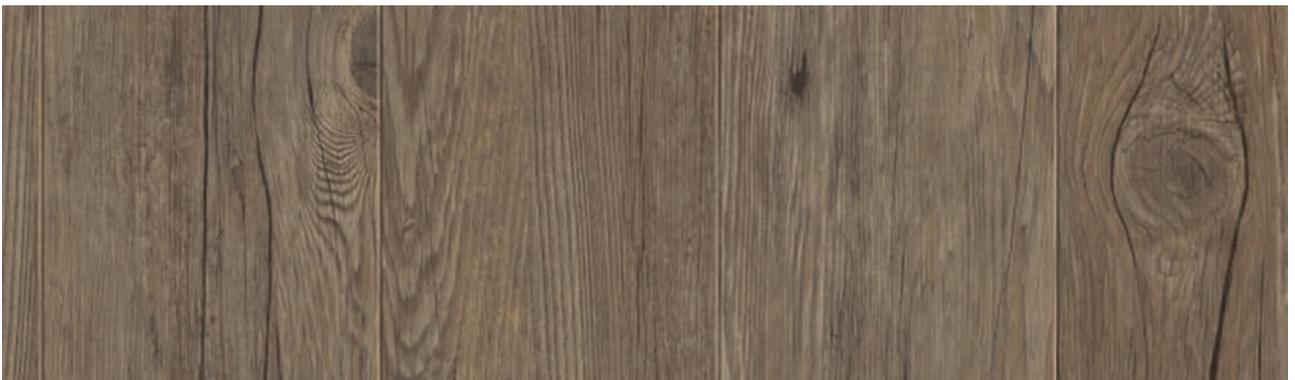

0360 DEEP FOREST CC28

 8.4" x 48.8" 



0800 TOASTED WOOD ROADSTER CC28

 9.5" x 57.5" 

Visit gerflorusa.com for stocking program.

DESCRIPTION	STANDARDS	REQUIREMENTS	UNITS	CREATION CLIC 28 (70)	CREATION CLIC 22 (55)
PRODUCT DESCRIPTION					
Reference Specification	ASTM F1700	Class	-	Class III Type B	Class III Type B
	ASTM F3261	-	-	Class I Type B Grade 1	Class I Type B Grade 1
Backing	-	-	-	100% Made From Recycled Material Class A per ASTM F3261	
Surface Treatment / Maintenance	-	-	-	PUR+ Matte	
Gauge Total Thickness	ASTM F386	-	in	0.24 in (6 mm)	0.2 in (5 mm)
Wearlayer Thickness	ASTM F410	-	in	28 mil (0.7 mm)	22 mil (0.55 mm)
Plank Size	-	-	ft-in (cm)	8.4" x 48.8" / 9.5" x 57.5" / 15.4" x 28.7" (21.4 x 123.9 / 24.2 x 146.1 / 39.1 x 72.9)	
Weight	-	-	lbs/sqf (kg/sqm)	2.0 lbs/sqf (9.85 kg/sqm)	1.7 lbs/sqf (8.3 kg/sqm)
PERFORMANCE					
Indentation – Residual	ASTM 1914	≤ - 8%	in	< -0.002 in (-0.83%) Meets Requirements under 75 lbs	
Static Load (250 psi)	ASTM F970	≤ 0.005 in	in	Meets Requirements	
Flexibility	ASTM F137	> 1.5 in	in	Meets Requirements	
Resistance to Heat	ASTM F1514	ΔE≤8	-	Meets Requirements	
Resistance to Light	ASTM F1515	ΔE≤8	-	Meets Requirements	
Coefficient of Friction	ASTM D2047	-	-	0.65 (Dry)	
Dimensional Stability	-	< 0.02 in	-	Meets Requirements	
Impact Insulation Class (IIC)	ASTM E989 (ASTM E492)	-	dB	49 dB	45 dB
European Impact Sound Insulation	EN ISO 717-2	-	dB	5 dB	4 dB
European Room Impact Walking Noise	NF S 31074	-	dB	72 dB	77 dB
Thermal Conductivity	EN 12 524	-	W/(m.K)	Excellent	
Chemical & Stain Resistance (5 min and 24 hrs)	ASTM F925	-	-	Excellent	
Fire Rating	ASTM E648	Class I	Class	Class I	
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	-	Meets Requirements	
Fire Rating Canada	CAN/ULC S102.2	-	-	Meets Requirements	
ENVIRONMENT HEALTH & SAFETY					
Naturally Bacteriostatic: Combats MRSA, E. Coli, and S. Aureus*	ISO 22196	-	-	Inhibits Spread of Infection at 99%	
Allergen-Free	-	-	-	OK	
Plant Certifications	ISO 14001, ISO 9001	-	-	Certified	
Production Waste	LEED v4 MRc3	-	-	100% Manufacturing Waste Recycled	
End of Life	-	-	-	100% Recyclable	
MATERIALS & RESOURCES: BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)					
Environmental Product Declaration (EPD)	LEED v4 MR BPDO	1 Product	-	Product-Specific Third Party Verified Type III	Product-Specific Third Party Verified Type III
Health Product Declaration (HPD v2.1)	LEED v4 MR BPDO	-	-	Self-Declared	Self-Declared
Sourcing of Raw Materials: Recycled Content	LEED v3 MRv4	Contributes	-	55%	55%
	LEED v4 MR BPDO				
Restriction Use of Harmful Chemicals	LEED v4 MR BPDO	Contributes for International Projects	-	100% REACH Compliant	100% REACH Compliant
MATERIALS & RESOURCES: INDOOR ENVIRONMENTAL QUALITY (IEQ)					
Indoor Air Quality / Low Emitting Materials	LEED v3 IEQc4.3 LEED v4 IEQ	Contributes	-	FloorScore®	FloorScore®
TVOC After 28 Days	ISO 16000-6	-	-	< 10 µg/m³	< 10 µg/m³
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions available on gerflorusa.com.				

*The best defense against the spread of infections is the implementation of an effective cleaning method.

CREATION CLIC PACKAGING DETAILS							
	FORMAT OF PLANKS / TILES		NUMBER OF UNITS PER BOX	COVERAGE PER BOX		WEIGHT / BOX	
	CM	INCH		SQM	SQF	KG	LBS
CREATION CLIC 22	21.4 x 123.9	8.4" x 48.8"	7	1.86	20.02	16	36
	24.2 x 146.1	9.5" x 57.5"	6	2.12	22.81	18	40
	39.1 x 72.9	15.4" x 28.7"	6	1.71	18.4	15	32
CREATION CLIC 28	21.4 x 123.9	8.4" x 48.8"	6	1.59	17.11	17	37
	24.2 x 146.1	9.5" x 57.5"	5	1.77	19.05	18	41
	39.1 x 72.9	15.4" x 28.7"	5	1.43	15.39	15	33

