



TARAFLEX[®]
— SPORTS FLOORING —



Gerflor[®]

REVEAL YOUR CREATIVITY

TURN YOUR DESIGN INTO REALITY



REVEAL YOUR POTENTIAL

A SOLUTION FOR EVERY PROJECT



Bell Bank Park / Legacy Sports, Mesa, AZ
72,000 sq. ft.. Taraflex Sport M Plus

A LARGE RANGE

OF COLORS AND DESIGNS

PRINTED DESIGNS | Roll length is ideal for basketball courts, resulting in no cross seams.



6381 MAPLE



5742 OAK



6350 LIGHT CHERRY



3708 WOOD GREY



4331 WOOD NATURAL



8069 WOOD CHOCOLATE



4453 WOOD BLUE



4536 WOOD DARK BLUE



4535 WOOD FOREST GREEN



8840 WOOD BLACK

Please refer to gerflorusa.com for color availability within the Taraflex® family of products

SOLID COLORS | Ideal roll length for basketball keys and center circles with minimal waste and no premium cost.



6430 BLUE



6180 RED




7422 BLUE WAVE



2791 POLISHED CONCRETE LIGHT GREY



6445 LAGOON



6457 BLUEBERRY



6211 GOLD



6830 BLACK



6347 BEIGE




6758 SILVER GRAY



6873 ANTHRACITE



3764 TAUPE



6038 TERRACOTTA



2404 LONDON LIGHT BLUE




6570 MINT GREEN




6557 FOREST




6431 TEAL



6146 CORAL



6159 PINK



6559 SPRING



Please refer to gerflorusa.com for color availability within the Taraflex® family of products




SELECT YOUR

TARAFLEX®

SPORTS FLOORING FOR YOUR NEEDS

All Taraflex® Sports Flooring meets the ASTM F2772 SHOCK ABSORPTION (SAFETY) REQUIREMENTS
 Floors that meet ASTM F2772 standards are categorized into one of the five classes (C1/C2/C3/C4/C5)
 based on the level of shock absorption, which must be greater than 10%.

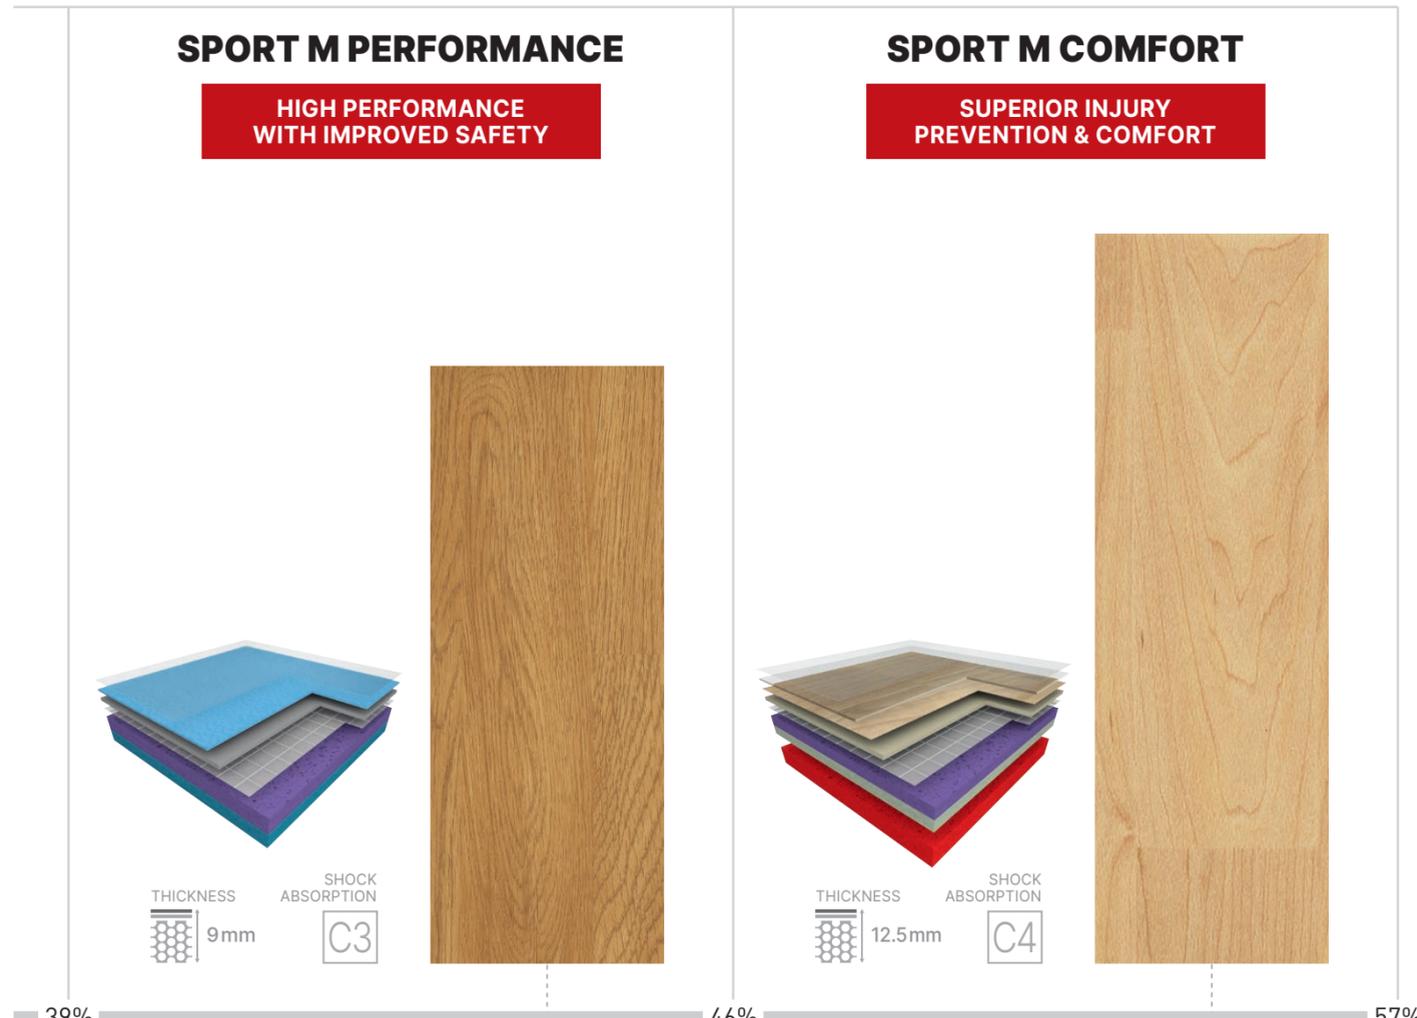

LONG-TERM INJURY PREVENTION – SHOCK ABSORPTION LEVEL

LONG-TERM INJURY PREVENTION – SHOCK ABSORPTION LEVEL




APPLICATIONS

	CLASS 2	CLASS 3
MULTI-USE		
MULTI-SPORT GYMNASIUMS		
COLLEGES, SPORT COMPETITIONS, & CLUBS		
TRAINING CAMPS		


	CLASS 3	CLASS 4
MULTI-USE		
MULTI-SPORT GYMNASIUMS		
COLLEGES, SPORT COMPETITIONS, & CLUBS		
TRAINING CAMPS		

**NEW VISUALLY IMPACTFUL DESIGNS
USING MY TARAFLEX® TECHNOLOGY**


All designs available to order now in:
Taraflex® Surface, Taraflex® Multi-Use 6.2, Taraflex® Sport M Plus,
Taraflex® Sport M Performance and Taraflex® Sport M Comfort

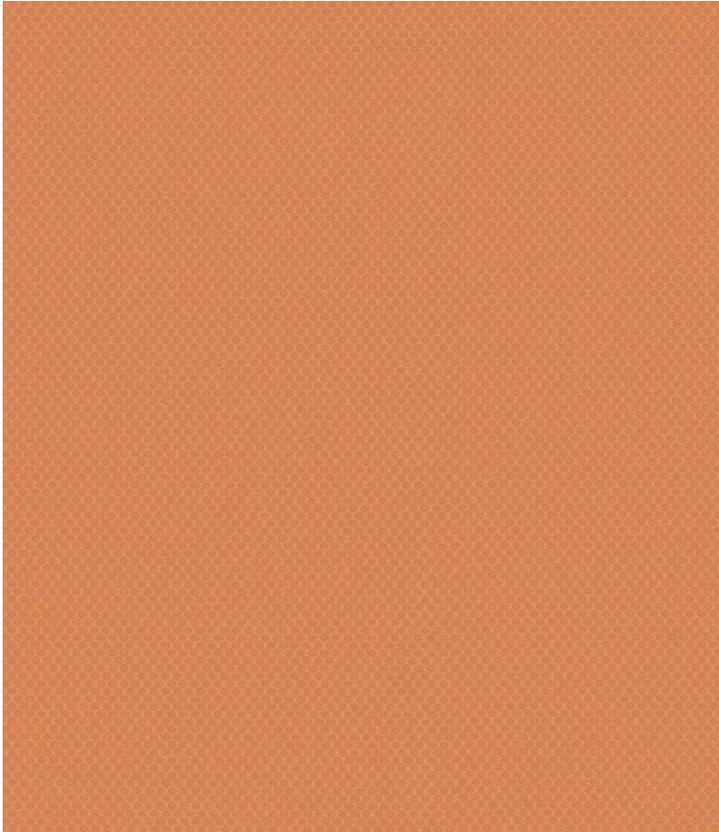

4537 BASKETBALL PATTERN

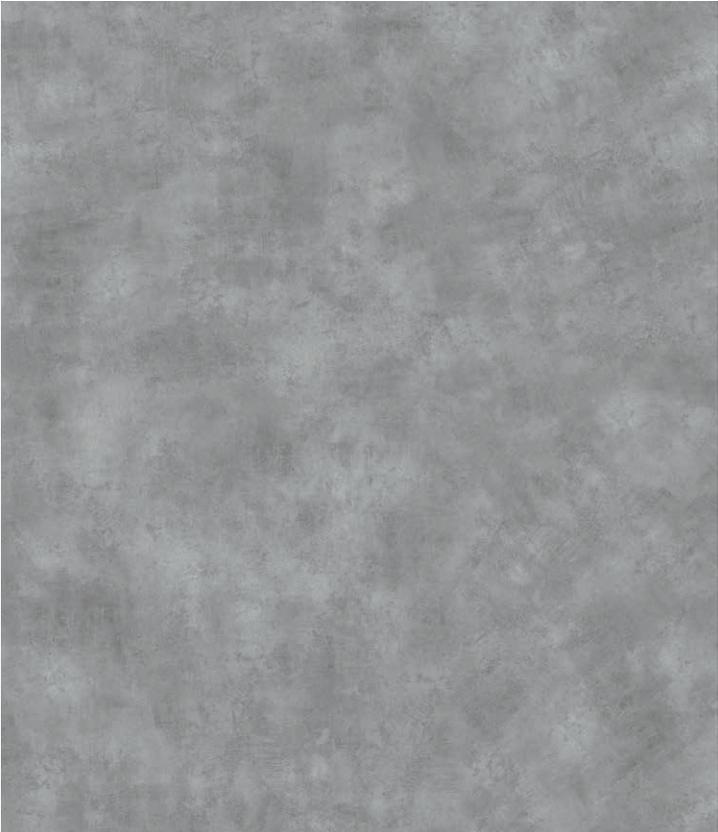

7755 PURE CONCRETE

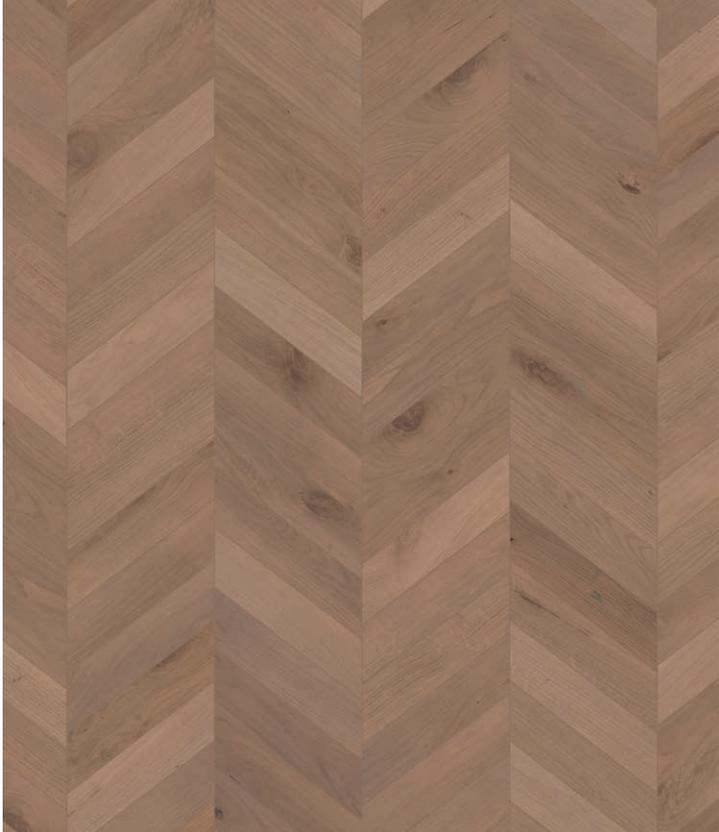

7020 GOLDEN HERRINGBONE




7019 WOOD CROSSCUT

GERFLOR **DRY-TEX SYSTEM**


FULL-SPREAD ADHESIVE INSTALLATION

A proven solution since 2009 that holds up to 100% RH and 25 lb subfloor moisture.

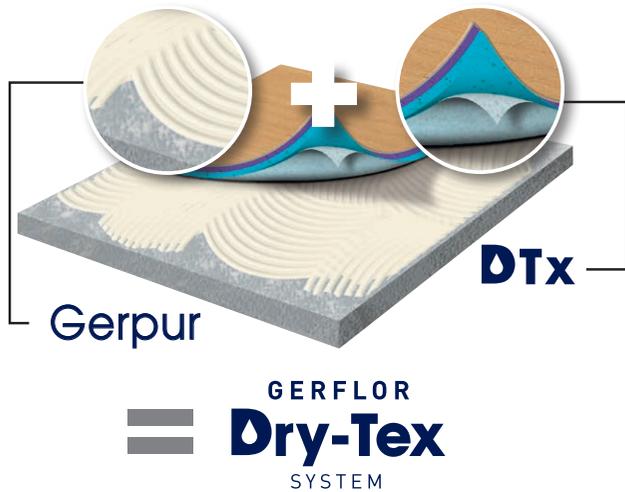

HOW IT WORKS

- ▶ **The Gerflor Dry-Tex System** is a revolutionary process integrating a textile material with the CXP™ HD foam backing. This textile backing allows for a stronger bonding of the adhesive onto the Taraflex® Sports Flooring.
- ▶ **GERPUR™** is a proprietary moisture-cured full-spread adhesive using breakthrough technology that reacts to humidity. The higher the moisture, the quicker the bonding!
- ▶ **No Moisture, No Mold, Guaranteed.**

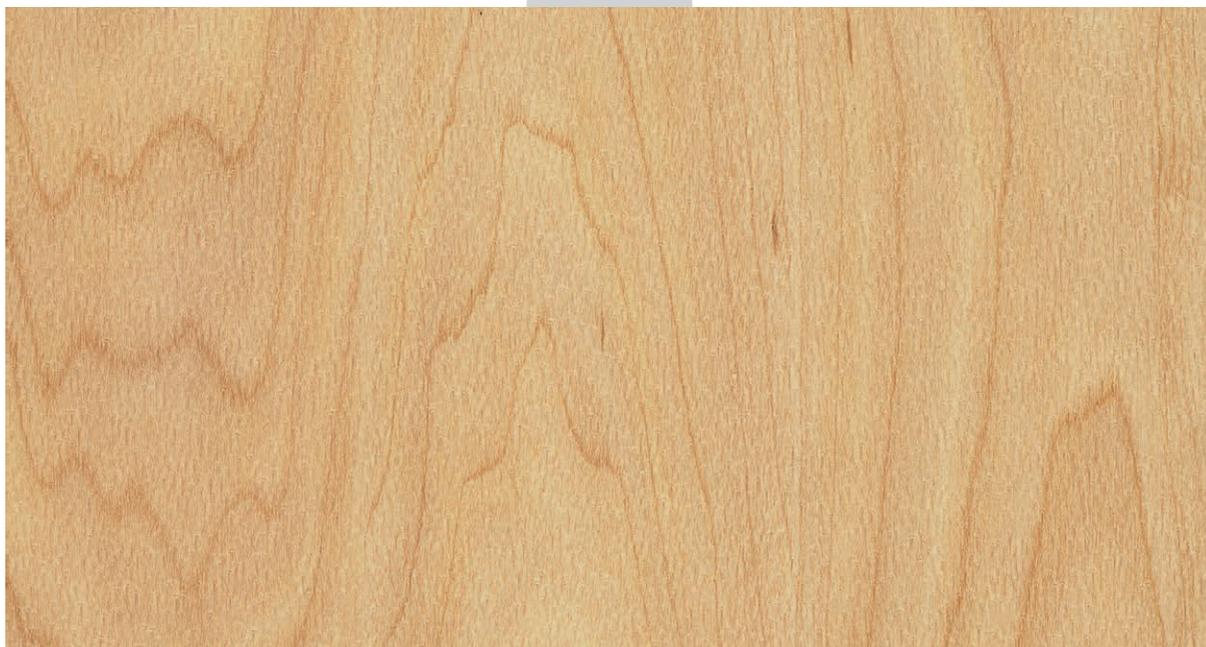

Taraflex® Sport M Plus with Gerflor Dry-Tex Backing in Maple (6381)

▶ **IDEAL FOR MULTI-PURPOSE FACILITIES**

The Gerflor Dry-Tex System is the only moisture mitigation system integrated into the backing of the sports floor. It is a 100% full-spread adhesive solution applied directly to the slab, resulting in no risk of the floor curling or shifting under pressure from rolling loads, and allowing you to host events with confidence.

▶ **MOST AFFORDABLE**

The Gerflor Dry-Tex System offers up to 70% cost savings compared to third-party mitigation systems because there is no additional labor required or need to purchase moisture barriers.

▶ **HIGHEST MOISTURE RESISTANCE**

The Gerflor Dry-Tex System withstands up to 100% RH of slab moisture, higher than any other sports floor.

▶ **NO-MOLD WARRANTY FOR GERFLOR DRY-TEX SYSTEM**

Taraflex® products installed using the Gerflor Dry-Tex System will not promote mold growth on, within, or directly under the installed floor.





GERFLOR USA
877.437.3567
info@gerflorusa.com



GERFLOR CANADA
438.333.0752
gerflorcanada@gerflor.com

gerflorusa.com
gerflorcanada.com

February 2023, GENA0110

DESCRIPTION	STANDARDS	REQUIREMENTS	TARAFLEX® SURFACE	TARAFLEX® MULTI-USE 6.2	TARAFLEX® SPORT M PLUS	TARAFLEX® SPORT M PERFORMANCE	TARAFLEX® SPORT M COMFORT
PRODUCT DESCRIPTION							
Surface Complex	-	-	-	D-Max^{DUARABILITY}	D-Max^{DUARABILITY}	D-Max^{DUARABILITY}	D-Max^{DUARABILITY}
Foam Backing	-	-	-	Double Density CXP HD+	Double Density CXP HD	Double Density CXP HD	Triple Density CXP HD
Total Thickness	-	-	0.08" (2.1 mm)	0.244" (6.2 mm)	0.27" (7.5 mm)	0.35" (9 mm)	0.47" (12 mm)
Wearlayer Thickness	-	-	0.08" (2.1 mm)				
Weight	-	-	0.59 lb/ft ² (2.9 kg/m ²)	0.86 lb/ft ² (4.2 kg/m ²)	0.95 lb/ft ² (4.6 kg/m ²)	1.1 lb/ft ² (5.4 kg/m ²)	1 lb/ft ² (5.1 kg/m ²)
Roll Width	-	-	4' 11" (1.5 m)				
Roll Length	Wood designs	-	86' 6" (26.4 m)	67' 3" (20.5 m)	86' 6" (26.4 m)	86' 6" (26.4 m)	86' 6" (26.4 m)
	Solid Colors	-	67' 3" (20.5 m)	-	67' 3" (20.5 m)	67' 3" (20.5 m)	67' 3" (20.5 m)
	My Taraflex®	-	67' 3" (20.5 m)				
SPORT PROPERTIES							
Shock Absorption (Safety)	ASTM F2772	Class 1	-	Class 2	Class 3	Class 3	Class 4
Vertical Deformation	ASTM F2772	≤ 0.12" (≤ 3 mm)	-	Pass	Pass	Pass	Pass
Sliding Effect	ASTM F2772	80 - 110	Pass	Pass	Pass	Pass	Pass
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	≥ 96%	≥ 96%	≥ 96%	≥ 96%
Anti-Friction Burns	-	-	Protocolsol^{TRIPLE ACTION}				
TECHNICAL CHARACTERISTICS							
Chemical Product Resistance	ASTM D543	-	Excellent	Excellent	Excellent	Excellent	Excellent
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	≥ 1500 N	≥ 1500 N	≥ 1500 N	≥ 1500 N
Fire Rating	ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
ENVIRONMENT HEALTH & SAFETY							
Ease of Maintenance	-	-	Protocolsol^{TRIPLE ACTION} / No Wax For Life				
Restricted Use of Harmful Chemicals	Mrc4 LEED v4	-	100% REACH Compliant				
Naturally Bacteriostatic*	ISO 22196	-	Inhibits the growth of bacteria				
Allergen-Free	-	-	100% Allergen-Free	100% Allergen-Free	100% Allergen-Free	100% Allergen-Free	100% Allergen-Free
Indoor Air Quality	EQc2 LEED v4	-	FloorScore® Certified	FloorScore® Certified	FloorScore® Certified	FloorScore® Certified	FloorScore® Certified
Recycled Content	Mrc3 LEED v4	-	50%	20%	28%	25%	22%
INSTALLATION METHOD							
Full-Spread Adhesive	ASTM F2170 (F1869)	Gerfix TPS+: ≤ 95% RH (≤ 10 lb) Gerfix Spray: ≤ 95% RH (≤ 8 lb) Gerfix 100: ≤ 100% RH (≤ 25 lb)	<u>www</u>	<u>www</u>	<u>www</u>	<u>www</u>	<u>www</u>
Loose-Lay Installation	ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	-	ISOLSPORT	ISOLSPORT	ISOLSPORT	<u>www</u>
Gerflor Dry-Tex System**	ASTM F2170 (F1869)	≤ 100% RH (≤ 25 lb)	-	-	D	D	-
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions **15-year no moisture failure and anti-mold warranty for Gerflor Dry-Tex System						

*The implementation of an effective cleaning method is the best defense against the spread of infections.

