



Layers

Gerflor®

Layers

			Widen application scope			
		Traffic	Improve acoustic 	Ease installation 	Damp floors 	Asbestos renovation 
Planks & tiles	LVT dB	Light to moderate	Smart Fix 16 dB	Smart Fix 16 dB	-	-
	LVT interlocking	Light to moderate	Acoustic 15 dB	-	-	-
			Acoustic Plus (19 dB)			
			Silence Plus 19 dB			
		High	Acoustic 15 dB			
	Acoustic Plus (19 dB)					
Rolls	Contract vinyl rolls	Light to moderate	-	-	Isolsport	-
		High	-	-		Isolsport
	Lino	Light to moderate	Korkment (15 dB)	-	-	-
	Shower system	Light	Tarafoam (17 dB)	-	-	-
Sport	Sport rolls (Taraflex®)	Light to moderate	-	-	Isolsport	Isolsport
	Sport tiles (Powergame)	Light	-	Outdoor underlayer	-	-

Protection

Bateco

The solution to protect your floor once installed




Gerflor Smart Fix 16 dB



Description

Underlayer with self-adhesive surface for a looselay installation of LVT dry back and to achieve up to 16 dB acoustic insulation.

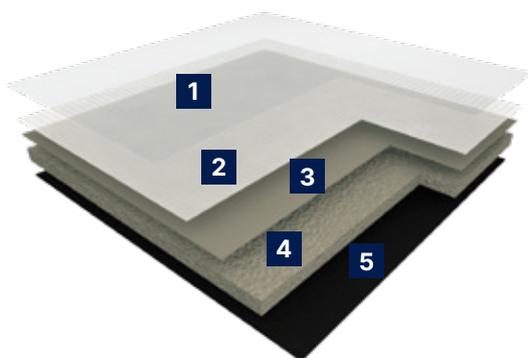

Thickness	2 mm
Weight	2000 g/m ²
Format	roll
Packaging	1 × 7,5 ml = 7,5 m ²
Code	1698
Compatible flooring*	Creation 30 / Creation 40 / Creation 55 / Virtuo 55 / Virtuo 30

Compliant with container shipment

- 1 Protection Film
- 2 Self-adhesive PET foil
- 3 Fiber Glass Grid
- 4 Polyurethane
- 5 Fleece

Installation*

Unroll the underlayer with the protection film on the top. Release the protective film and apply the LVT 90° to underlayer.

[More information on gerflor.com](https://www.gerflor.com)



Benefits



**Up to 16 dB
impact sound insulation****

- Improves the acoustic comfort with Creation 30 and Creation 55



**Easy to install
(No adhesive needed)**

- More comfort for the installer
- No opening time
- No waiting time : the floors can be used immediately



**Easy to remove
(Loose lay installation)**

- The subfloor remains clean
- No need to scratch the adhesive for the renovation

*Please refer to installation guidelines for updated list and possible restriction

**measured according to EN ISO 717-2




Gerflor Acoustic 15 dB



For LVT
clic & rigid

Description

Isophonic underlayer to reduce impact noise up to 15 dB. Adapted to all types of traffic but semi-industrial and industrial.

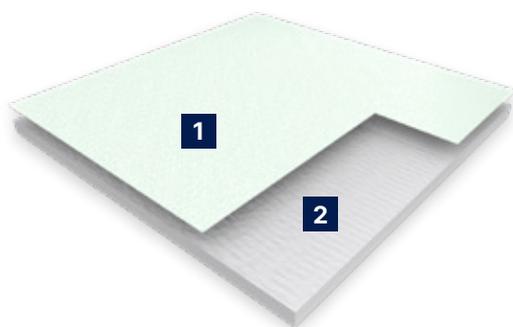

Thickness	0,93 mm
Weight	200 g/m ²
Format	roll
Packaging	1 × 15 ml = 15 m ²
Code	1798
Compatible flooring*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Creation 70 clic / Virtuo 30 Clic / Virtuo 55 Clic / Rigid 30 Lock


Compliant with container shipment

- 1 Anti-slip surface
- 2 Polyester scrim

Installation*

Underlayer reverse rolled. Unroll the underlayer with anti-slip surface on top side. To connect two rolls, use a simple-sided adhesive.

[More information on gerflor.com](https://www.gerflor.com)

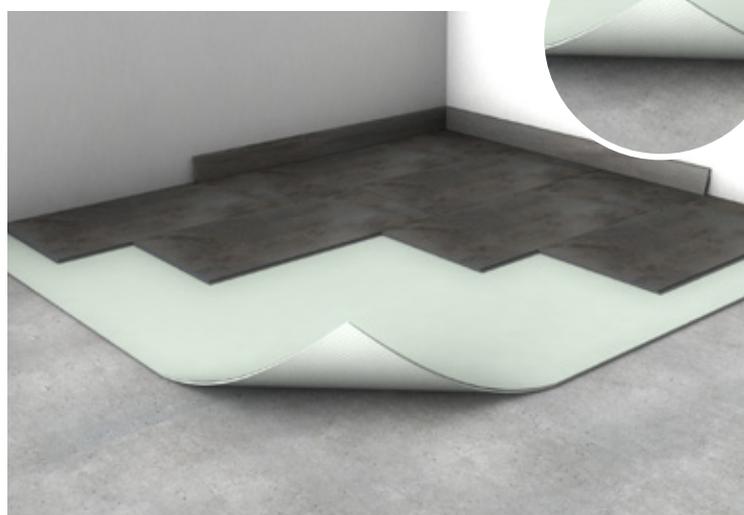

Benefits



15 dB

15 dB Impact Sound Insulation**

- Improves the acoustic comfort



Adapted to all traffic types

- Fits to the floor traffic resistance



Easy to handle and to install

- 15 sqm packaged in a light (3 kg) roll
- Easy to install: lay, cut & tape



- From 58% and up to 72% recycled content

*Please refer to installation guidelines for updated list and possible restriction

**15 dB measured according to EN ISO 717-2 with Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic and Rigid 30 Lock 16 dB measured with Creation 70 Clic.




Gerflor Acoustic Plus



Description

Isophonic underlayer to reduce impact noise up to 19 dB. Adapted to all types of traffic but semi-industrial and industrial.

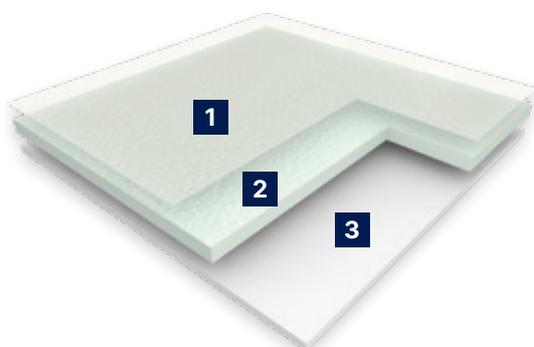

Thickness	1,2 mm
Weight	300 g/m ²
Format	roll
Packaging	0,98 × 15,3 ml = 15 m ²
Code	0704
Compatible flooring*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Creation 70 clic / Virtuo 30 Clic / Virtuo 55 Clic


Compliant with container shipment

- 1 Anti-slip surface
- 2 Polyester scrim
- 3 PET acoustic fleece

Installation*

Unroll the underlayer with anti-slip surface on top side.
To connect two rolls, use a simple-sided adhesive.

[More information on gerflor.com](https://www.gerflor.com)

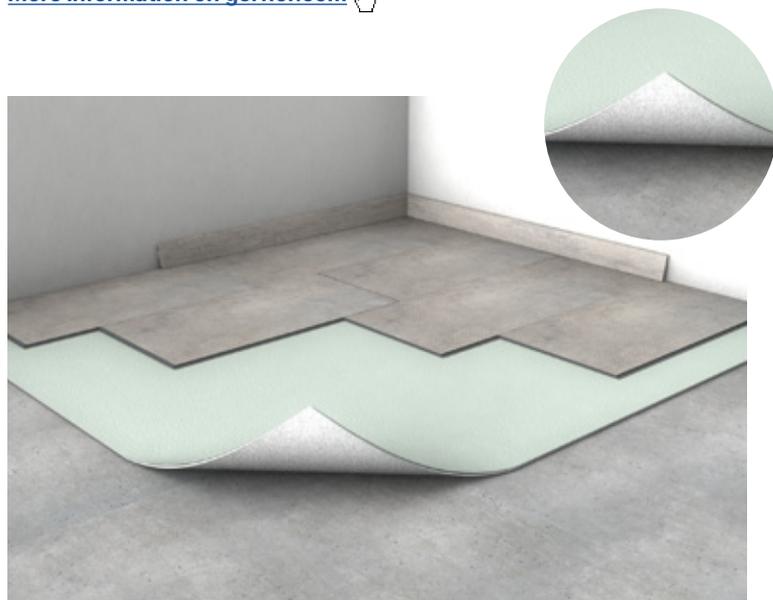

Benefits



19 dB Impact Sound Insulation**

- Improves significantly the acoustic comfort



Adapted to all traffic types

- Fits to the floor traffic resistance



Easy to handle and to install

- 15 sqm packaged in a light (4,25 kg) roll
- Easy to install: lay, cut & tape



- From 36% and up to 42% recycled content

*Please refer to installation guidelines for updated list and possible restriction
**Measured according to EN ISO 717-2 with Creation 70 CLic, Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic.




Gerflor Silence Plus 19 dB

 For LVT
clik & rigid

Description

Underlayer in accordion to achieve up to 19 dB acoustic sound insulation with Gerflor LVT Clic. Adapted to moderate traffic.

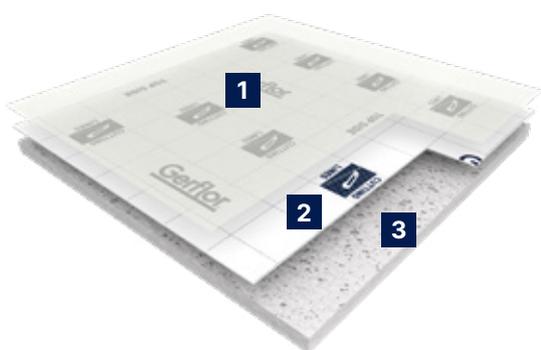

Thickness	1,5 mm
Weight	300 g/m ²
Format	accordion
Packaging	1,18 × 8,5 ml = 10 m ²
Code	5949
Compatible flooring*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Virtuo 30 Clic / Virtuo 55 Clic / Rigid 30 Lock

Compliant with container shipment

- 1 Anti-slip surface
- 2 PET Film
- 3 XPS Foam

Installation*

Unfold the underlayer and place the white side on the subfloor. To connect two Bands, use a simple-sided adhesive.

[More information on gerflor.com](https://www.gerflor.com) 



Benefits



19 dB Impact Sound Insulation**

- Improves significantly the acoustic comfort



Adapted to moderate traffic

- Perfectly suitable for residential as well as for semi-contract uses



Easy to handle and to install

- 10 sqm packaged in an handleable and light (3,5 kg) box
- Easy to install: lay, cut & tape



- 100% recyclable

*Please refer to installation guidelines for updated list and possible restriction

**Measured according to EN ISO 717-2 with Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic.




Tarafoam

 for Tarasafe rolls

Description

Isophonic underlayer to reduce impact noise up to 17** dB in Gerflor shower system.

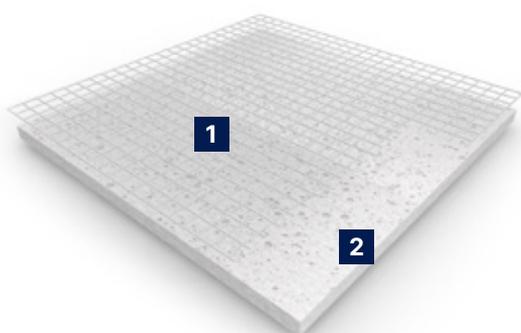

Thickness	2 mm
Weight	940 g/m ²
Format	roll
Packaging	2 m roll x 20 lm = 40 m ²
Code	997C
Compatible flooring*	Tarasafe in shower


Compliant with container shipment

- 1 Glass fiber grid
- 2 PVC THD foam

Installation*

Unfold the underlayer and place the white side on the subfloor. To connect two rolls, use a simple-sided adhesive.

[More information on gerflor.com](https://www.gerflor.com) 

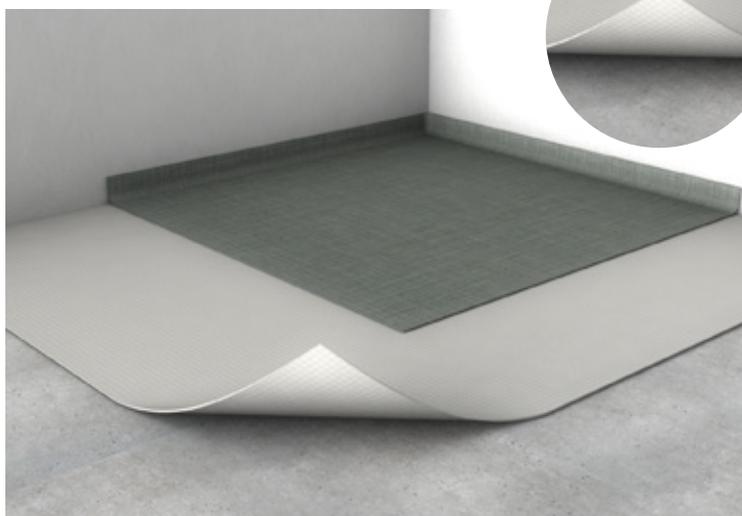

*Please refer to installation guidelines for updated list and possible restriction
**17 dB with Tarasafe Ultra H2O, 16 dB with Tarasafe Standard, Tarasafe Ultra, Tarasafe Design & Tarasafe Geo.

Benefits



17** dB Impact Sound Insulation in the shower system

- Brings acoustic comfort when the shower is upstairs



Stocking flexibility

- No need to stock a comfort version of the roll, the underlayer can be used with any colour of the Tarasafe shower system floor range



- 100% recyclable with the PVC floors



Korkment

 for Lino
rolls

Description

Isophonic underlayer to reduce impact noise up to 15 dB with Gerlor DLW linoleum.




Thickness	2 mm
Weight	1450 g/m ²
Format	roll
Packaging	2 m roll x 20-31 lm = 40-62 m ²
Code	R1020102
Compatible flooring*	2 mm and 2,5 mm DLW Linoleum compact (except Lino Art Star and Lino Art Metallic)

1 72% natural materials
(linseed oil, resin, cork, jute)

Installation*

Installation of the Korkment can be in same direction as the DLW Linoleum (with an offset of minimum 50 cm between seams of Korkment and DLW Linoleum) or transverse.

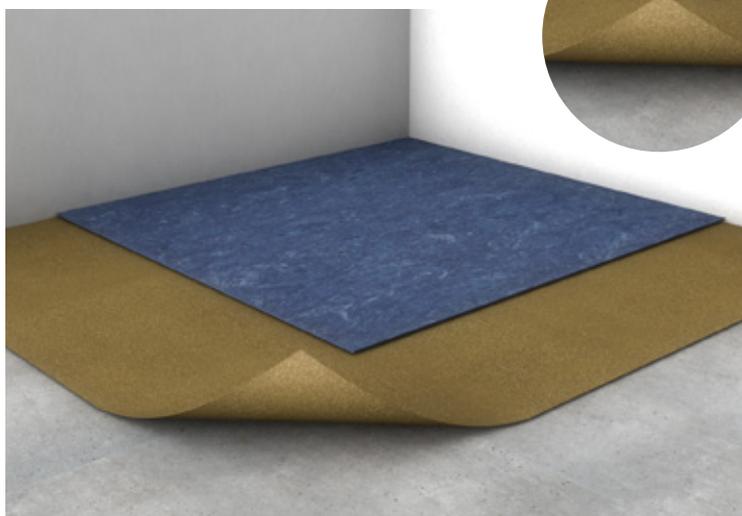

*Please refer to installation guidelines for updated list and possible restriction

Benefits



15 dB

15 dB acoustic insulation

- Improves the acoustic comfort



Natural acoustic solution

- 72% made of natural materials




Gerflor Smart Fix 16 dB



Description

Underlayer with self-adhesive surface for a loose lay installation of LVT dry back and to achieve up to 16 dB acoustic insulation.

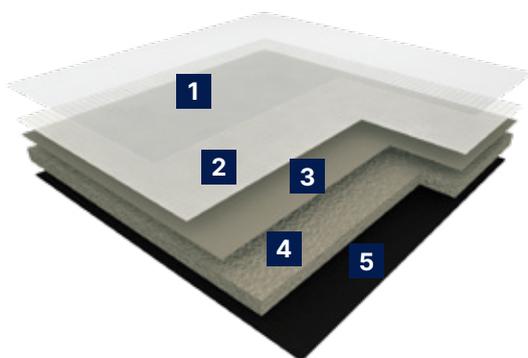

Thickness	2 mm
Weight	2000 g/m ²
Format	roll
Packaging	1 × 7,5 ml = 7,5 m ²
Code	1698
Compatible flooring*	Creation 30 / Creation 40/ Creation 55 / Virtuo 55 / Virtuo 30

*Compliant with container shipment
Please refer to installation guidelines for updated list and possible restriction

- 1 Protection Film
- 2 Self-adhesive PET foil
- 3 Fiber Glass Grid
- 4 Polyurethane
- 5 Fleece

Installation*

Unroll the underlayer with the protection film on the top. Release the protective film and apply the LVT 90° from underlayer.

[More information on gerflor.com](#)



**Please refer to installation guidelines for updated list and possible restriction*

***Measured according to EN ISO 717-2*

Benefits



Easy to install (No adhesive needed)

- More comfort for the installer
- No opening time
- No waiting time : the floors can be used immediately



Easy to remove (Loose lay installation)

- The subfloor remains clean
- No need to scratch the adhesive for the renovation



Up to 16 dB impact sound insulation**

- Improves the acoustic comfort with Creation 30, Creation 40 and Creation 55




Outdoor Underlayer



for Powergame
Tiles

Description

Underlayer to prevent the unclipping of outdoor tiles in specific conditions (hot weather, non flat subfloor). Must be used outdoor, for temporary use only (events).

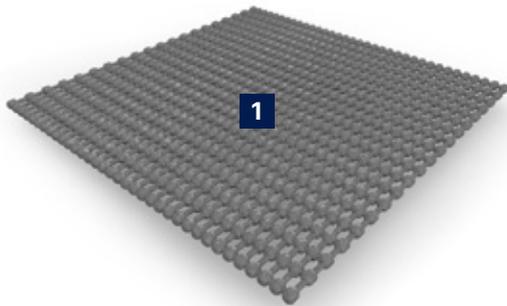


Thickness	2,95 mm
Weight	570 g/m ²
Format	roll
Packaging	2m roll x 20 lm = 40 m ²
Code	S249
Compatible flooring*	PowerGame+

Compliant with container shipment

1 PVC coated polyester
with a foam texture

Installation*

Unroll the underlayer. Edge to edge installation.
Before laying the outdoor tiles.
Only for temporary use.

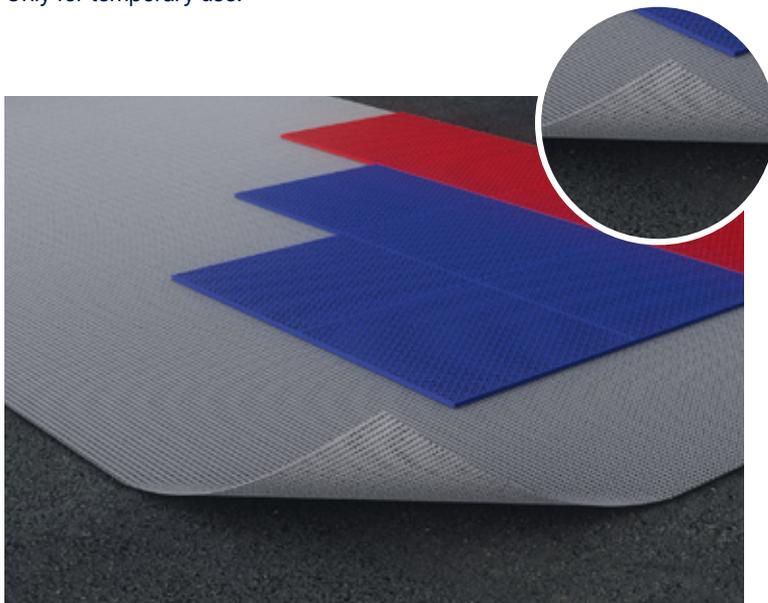

**Please refer to installation guidelines for updated list and possible restriction*

Benefits



Widen the application scope of Powergame+

- Prevents unclipping of PowerGame+ tiles, in case of hot temperatures and non-flat subfloors.



Easy to install and uninstall

- Looselay installation



Economical

- Can be used several times (estimated life time: 12 events)



Isolsport



Description

Designed to enable loose laying on sensitive subfloors (risks of humidity, asbestos...).



Thickness	1,7 mm
Weight	1345 g/m ²
Format	roll
Packaging	2 m roll x 45 lm = 90 m ²
Code	0827/0828/0829/0830
Compatible flooring*	Taraflex® sport floor / Taralay / Transit / Tradiflor / Taradal / Transidal / Saga ² floor


Compliant with container shipment

1 100% PVC

Installation*

Keep the raised surface, floor side, on the periphery.
Bond vinyl floors with an acrylic adhesive (for instance Gertec from Gerflor)
For installation on concrete subfloors.

[More information on gerflor.com](https://www.gerflor.com)

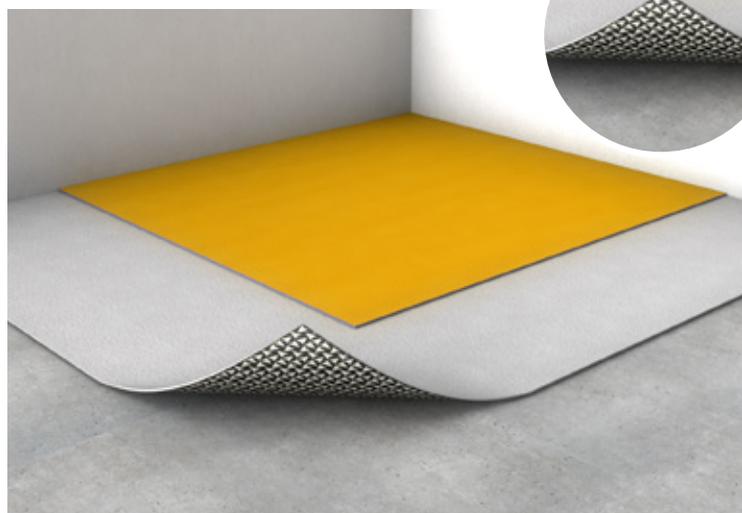

*Please refer to installation guidelines for updated list and possible restriction

Benefits



Installation on damp surfaces (<7% humidity (CCM))

- The raised effect allows humidity to circulate



Installation on sensitive surfaces (asbestos)

- The loose lay installation enables to recover asbestos floor without damage



- 100% recyclable with the PVC floors



Isolsport



for Sport Rolls,
Vinyl rolls & tiles

Description

Designed to enable loose laying on sensitive subfloors (risks of humidity, asbestos...).



Thickness	1,7 mm
Weight	1345 g/m ²
Format	roll
Packaging	2 m roll x 45 lm = 90 m ²
Code	0827/0828/0829/0830
Compatible flooring*	Taraflex® sport floor / Taralay / Transit / Tradiflor / Taradal / Transidal / Saga ²


Compliant with container shipment

1 100% PVC

Installation*

Keep the raised surface, floor side, on the periphery.
Bond vinyl floors with an acrylic adhesive (for instance Gertec from Gerflor)
For installation on concrete subfloors.

[More information on gerflor.com](https://www.gerflor.com)

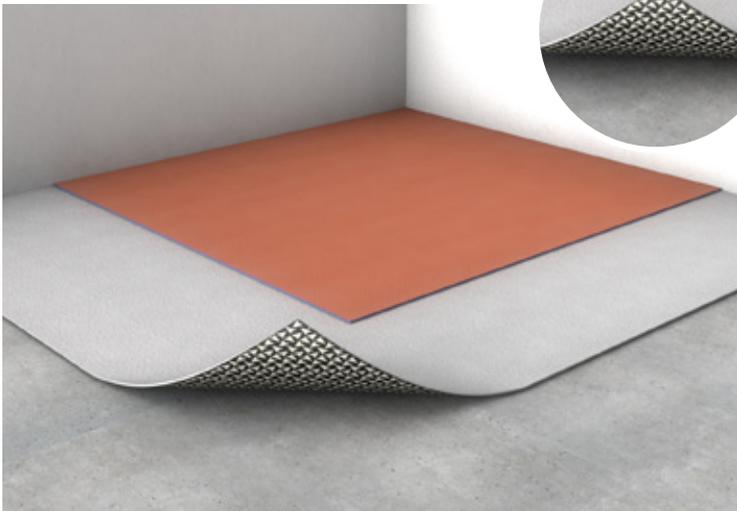

*Please refer to installation guidelines for updated list and possible restriction

Benefits



Installation on sensitive surfaces (asbestos)

- The loose lay installation enables to recover asbestos floor without damage



Installation on damp surfaces (<7% humidity (CCM))

- The raised effect allows humidity to circulate



- 100% recyclable with the PVC floors




Bateco



for Sport Rolls,
Vinyl rolls & tiles

Description

Designed to protect sports floors by non sporting use of the flooring. It prevents marking by chairs, tables, heels on the sport floor.

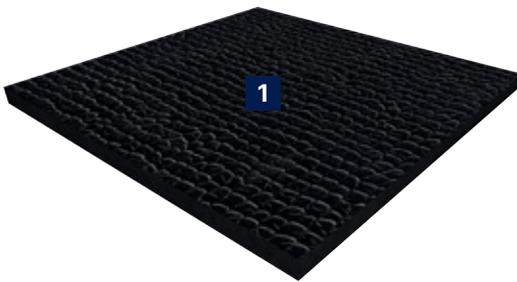

Thickness	1,5 mm
Weight	2250 g/m ²
Format	roll
Packaging	1,5 m roll x 20/30 lm = 30/45 m ²
Code	HM12/HM06
Compatible flooring*	All


Compliant with container shipment

1 100% recycled PVC

Installation*

Edge to edge installation. Strips can be secured with single-sided adhesive tape, for example AT7 from Gerflor. Specific equipments exist to transport, store, roll/unroll Bateco.

[More information on gerflor.com](#) 

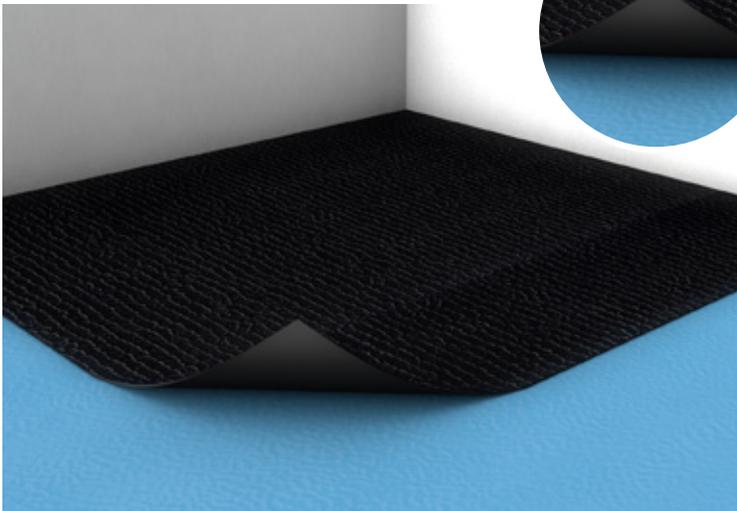

**Please refer to installation guidelines for updated list and possible restriction*

Benefits



Efficient protection of the sport flooring during non sportive event

- 1,5 mm homogeneous surface
- Good resistance to abrasion and indentation



Specific range of equipment available

- Easy to install and roll
- Easy to store



Environmental friendly

- Made of 100% recycled pvc
- Reusable
- 100% recyclable with the PVC floors

