

**Gerflor**  
theflooringgroup

# FAST TRACK SPECIALIST LOOSE-LAY TILES

SAVE TIME & MONEY



200M<sup>2</sup>  
8 HOURS - 2 PEOPLE

# DESIGNING & DELIVERING FUTURE-PROOF FLOORS

## OUR MISSION

To create, manufacture and market innovative, design-led and eco-responsible solutions for floorings.

Gerflor understands the challenge of delivering creative, hard-working building environments.

With a wide choice of world class vinyl and linoleum brands, you can be confident that Gerflor have a flooring solution for every sector.

A palette of inspiring designs made with environmentally friendly and sustainable materials, offers you the freedom to future-proof your building interiors.

## BIM

Gerflor's key ranges are available as BIM objects, you can download these for free by going to the National BIM Library: [www.nationalbimlibrary.com/gerflor](http://www.nationalbimlibrary.com/gerflor)

All Gerflor BIM objects are available in IFC and Revit format.



**CONTACT US TODAY FOR YOUR SAMPLING NEEDS**

**GERFLOR UK**

 [www.gerflor.co.uk](http://www.gerflor.co.uk)

 +44 (0) 1926 622600

@ [contractuk@gerflor.com](mailto:contractuk@gerflor.com)

**GERFLOR IRELAND**

 [www.gerflor.ie](http://www.gerflor.ie)

 +353 (0) 42 966 1431

@ [gerflorirl@gerflor.com](mailto:gerflorirl@gerflor.com)

# BENEFITS

## SPECIALIST LOOSE-LAY TILES (GTI MAX & ATTRACTION®)

By installing loose-lay vinyl flooring systems, clients can benefit from limited disruption to their operations, avoid closure for the 24 hours or more needed to install traditionally adhered floorings and, importantly, minimise loss of profits. Combining design with high resistance, these systems have been specifically developed for fast-track renovation and utilise advanced interlocking technology to provide rapid, clean, cost-effective installation, without the need for adhesive or specialist tools. Crucially, they can be laid over most existing smooth floors (even ceramic tiles) with minimal preparation to the subfloor. Plus, as adhesive is eliminated, there is no need to factor in drying times which has a positive effect on downtime, the environment and potential loss of turnover.

### FAST AND EASY INSTALLATION



Loose-lay fast track products, no need to close your premises

### INSTALLATION ON ANY TYPE OF SURFACE



Install over any existing hard surface

### QUICK AND SIMPLE MAINTENANCE



Quick and easy to maintain and individual tiles can be replaced in minutes

### SAFE, QUIET AND COMFORTABLE



Improves user comfort, noise and slip risk is reduced

### CUSTOMISE YOUR ENVIRONMENT



Create zones, custom way finding and safety logos

### EXTREMELY HARDWEARING



Withstands both heavy pedestrian and mechanical traffic



# FAST AND EASY INSTALLATION

## NO NEED TO CLOSE YOUR PREMISES

The GTI Max and Attraction® specialist technical tile ranges are quick and easy to install and maintain and they are perfect for fast track renovations. They are tried and tested for the harshest applications and can withstand heavy traffic. They have a patented interlocking construction and can be laid with minimal disruption to your site.

- Fast loose-lay installation allowing the area to remain open
- A 2 person team can install up to 200m<sup>2</sup> in 8 hours
- Clean installation, with no adhesive or dust
- The floor can be used immediately

\*\* Please refer to installation guidelines






# INSTALLATION ON ANY TYPE OF SURFACE



**Granwood**



**Resin**



**Concrete**



**Tiles**



**Wet Surfaces**

- up to 7% humidity / 92% RH



**Asbestos Surfaces**

**Before**



**After**



PUR+



## EASY MAINTENANCE & REPLACEMENT



A highly durable PUR+ surface treatment makes maintenance a breeze, providing excellent cleaning characteristics and an improved resistance to scratching, it significantly delays the application of wax and provides an unrivalled level of resistance to the harshest of chemicals.

If a tile ever needs to be replaced, the interlocking design allows for replacement of individual tiles in a matter of minutes.





**SAFE, QUIET**



**AND COMFORTABLE**



**Less noise** than other commonly used hard surfaces when users walk on it

**Underfoot comfort**, reduces fatigue for staff and customers



More **slip-resistant** than other types of surface (R10 rated)



**4 x less hazardous** than tiling in the head impact assessment (Standard 1177: head impact - 66 cm vs. 10 cm)




**Fewer breakages** from dropped items compared to ceramic or concrete floors

## **SLIP RESISTANCE, NOISE REDUCTION & REDUCED BREAKAGES**

Slips and falls are a common concern in contract locations. Our systems provide superior slip resistance compared to other commonly used hard-surface flooring options. With the embossed surfaces, you can be confident that your staff and customers will be safe.

There are also the acoustic benefits vs. other hard-surface flooring options, where our technical tiles reduce the noise of foot and rolling traffic.

The same surface that protects your staff and customers, also helps to reduce breakages from dropped items.

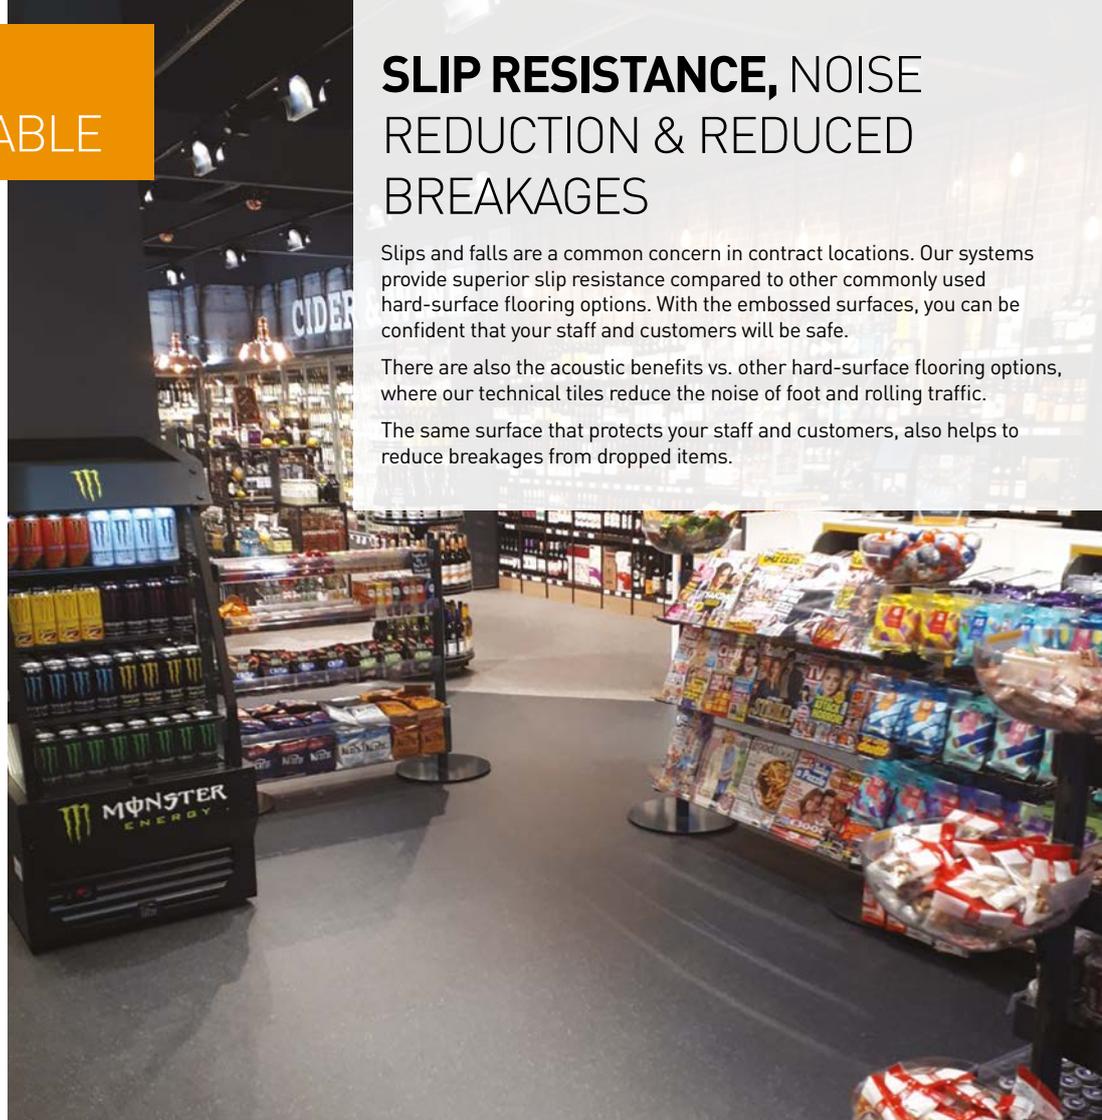



# CUSTOMISE YOUR ENVIRONMENT

## ZONING & BRANDING

The specialist technical tiles with their interlocking design and colour range offer the ability to create zones. In addition, these can be used for custom way finding, safety, and logo floor signage.

- Create your logo using our water jet cutting system
- The logo is produced using the finished product
- Withstands intensive footfall without fading





# EXTREMELY HARDWEARING

## TRIED & TESTED

Tried and tested in the harshest contract applications. GTI's unique and advanced design allows it to withstand the heaviest traffic. The patented, interlocking design, with double glass fiber grids in a 4mm-thick recycled interlayer, provide extreme dimensional stability against rolling loads. Densely pressed colour chips throughout the 2mm-thick, pure colour wearlayer hide scratches and provide the best wear resistance.



Tiles triple pressed  
at over **3000 T**



**2 mm**  
wear layer



**OUR SOLUTIONS:**

## **GTI MAX:** THE ULTIMATE FLOORING INNOVATION



0230  
Blue



0231  
Yellow




0232  
Red



0233  
Green




0234  
Clear Grey



0235  
Dark Grey



0252  
Titanium




0253  
Aluminium



0255  
Saphir



0259  
Grecale




0260  
Ora



0261  
Scirocco



0247  
Magma




0249  
Carbon




0262  
Libeccio




0263  
Bora



0268  
Ermellino



1249  
Tramontana




0264  
Ponente




0236  
Black



0265  
Maestrale



0266  
Peler




0267  
Levante

**OUR SOLUTIONS:**

## **ATTRACTION®:** THE ATTRACTIVE FLOORING INNOVATION



2741 Brooklyn



2740 Harlem Soft



2744 Queens Soft



2742 Times Square



2743 Central Park



2745 Plaza



4343 Tokelau




4351 Greige



4146 Moheli




8053 Anambas



4004 Pago



4003 Tao




3707 Paraiba



8577 Amazonas




4476 Wattaru



8157 Goias



8386 Boa Vista




8736 Recife



8837 Songo



4342 Juara



3709 Ceara

Before



SEE OUR PRODUCTS  
IN ACTION



200M<sup>2</sup>  
8 HOURS - 2 PEOPLE

After

# AIRPORTS

## ENHANCE THE JOURNEY

### GATWICK AIRPORT

#### Grey corridor flooring replacement

Following a successful 2 year trial of a new floor covering for back of house corridor flooring, Gatwick are now rolling out the GTI Max range from Gerflor. The solution consists of an interlocking tile which can be removed and replaced if necessary with no hot works or glues etc.

▀▀ This project has taken extensive planning, working closely with retail and terminals. The work has taken approx. a week to complete working from 02:00 -12:00. This has involved trimming down existing doors to accept the new floor height, setting up diversions for retail deliveries, removing the old worn out lino, cleaning, priming and screeding the existing floor and finally laying the new tile. We are delighted with the final result. ▀▀

Russell Freeman  
Account Director at Engineering Services



200M<sup>2</sup>

8 HOURS - 2 PEOPLE



Before

After

# SCHOOLS ON THE FAST TRACK

## WHITWORTH PARK SCHOOL

▀▀ The works were planned in phases and during the night to cause no disruption to the day to day operation of the school. However, following two days on site we decided to stop the works due to the amount of dust and time it was taking to remove the existing floor finish. We decided instead to install 600m<sup>2</sup> of Gerflor's GTI Max Carbon which eliminated the issues with dust, saving us money and time. GTI Max allowed us to go over the top of the existing floor finish without any subfloor preparation or having to remove it whilst still allowing the existing floor finish to breath. ▀▀

Philip Etherington, Senior Building  
Surveyor at Durham County Council  
Design Services



200M<sup>2</sup>  
8 HOURS - 2 PEOPLE



# UNIVERSITIES

## CLOSE CONNECTION

### UNIVERSITY OF LIMERICK

“ We were interested in Gerflor’s Attraction®, as the edges of the tile interlock in such a way that you don’t readily notice the connection. This sense of a single treatment throughout was important for us, as in certain areas there was a demand to provide spaces that are adaptable and can be used as individual rooms, or opened up to provide a single larger space. ”

Ger Carty, Associate Director at  
Grafton Architects



# SPORTS FACILITIES

KEEP ON MOVING

## THE GYM GROUP

“ Gerflor have provided flooring to all of our gyms across the UK and we have been impressed by the performance given the intensive application in our 24 hour operation. We worked with Gerflor to identify how we could improve performance further and reduce installation times and after a successful pilot we switched to the Gerflor GTI product which does not require adhesive, can be laid on a damp floor and is more forgiving on rough surface finish. ”

David Melhuish, Head of Property Development at the Gym Group



# OFFICES

ATTRACTIVE DOWNTIME

## HEWLETT PACKARD

▲▲ The client was so impressed with the minimal downtime involved with the installation, this was one of the main reasons why they decided to proceed with the specification which we had recommended. We regularly recommend and specify Gerflor products as there is a wide range of attractive fit for purpose products to choose from. Gerflor provide a very good service in terms of technical assistance for architects, clients or end-users... and for us as a flooring contractor. ▽ ▽

Philip Dynes, Director and Contracts  
Manager at Dynes Flooring Contractors



# RETAIL

OPEN ALL HOURS

## NISA

At NISA we regularly recommend the use of Gerflor's GTI Max to our partners, it's a fantastic fast track flooring system. Installation is very fast and straightforward. So quick and dust-free that they can remain trading during the install if they want!

Darren May, Head Of Format Development & Category Management at NISA Retail

**71%**  
OF CONVENIENCE  
SHOPPERS WANT  
**HEALTHY  
SNACKING**  
AS PART OF THE  
**LUNCH  
ON THE GO  
OFFER**




**PROTEIN  
SNACKING  
GREW  
8%  
IN 2017**



SIGN UP TODAY  
AND GET 4 PERIODS  
OF LEAFLET PRINT  
AND DISTRIBUTION  
FOR FREE  
VISIT STAND 104 AND  
SEE FLYER FOR FULL DETAILS



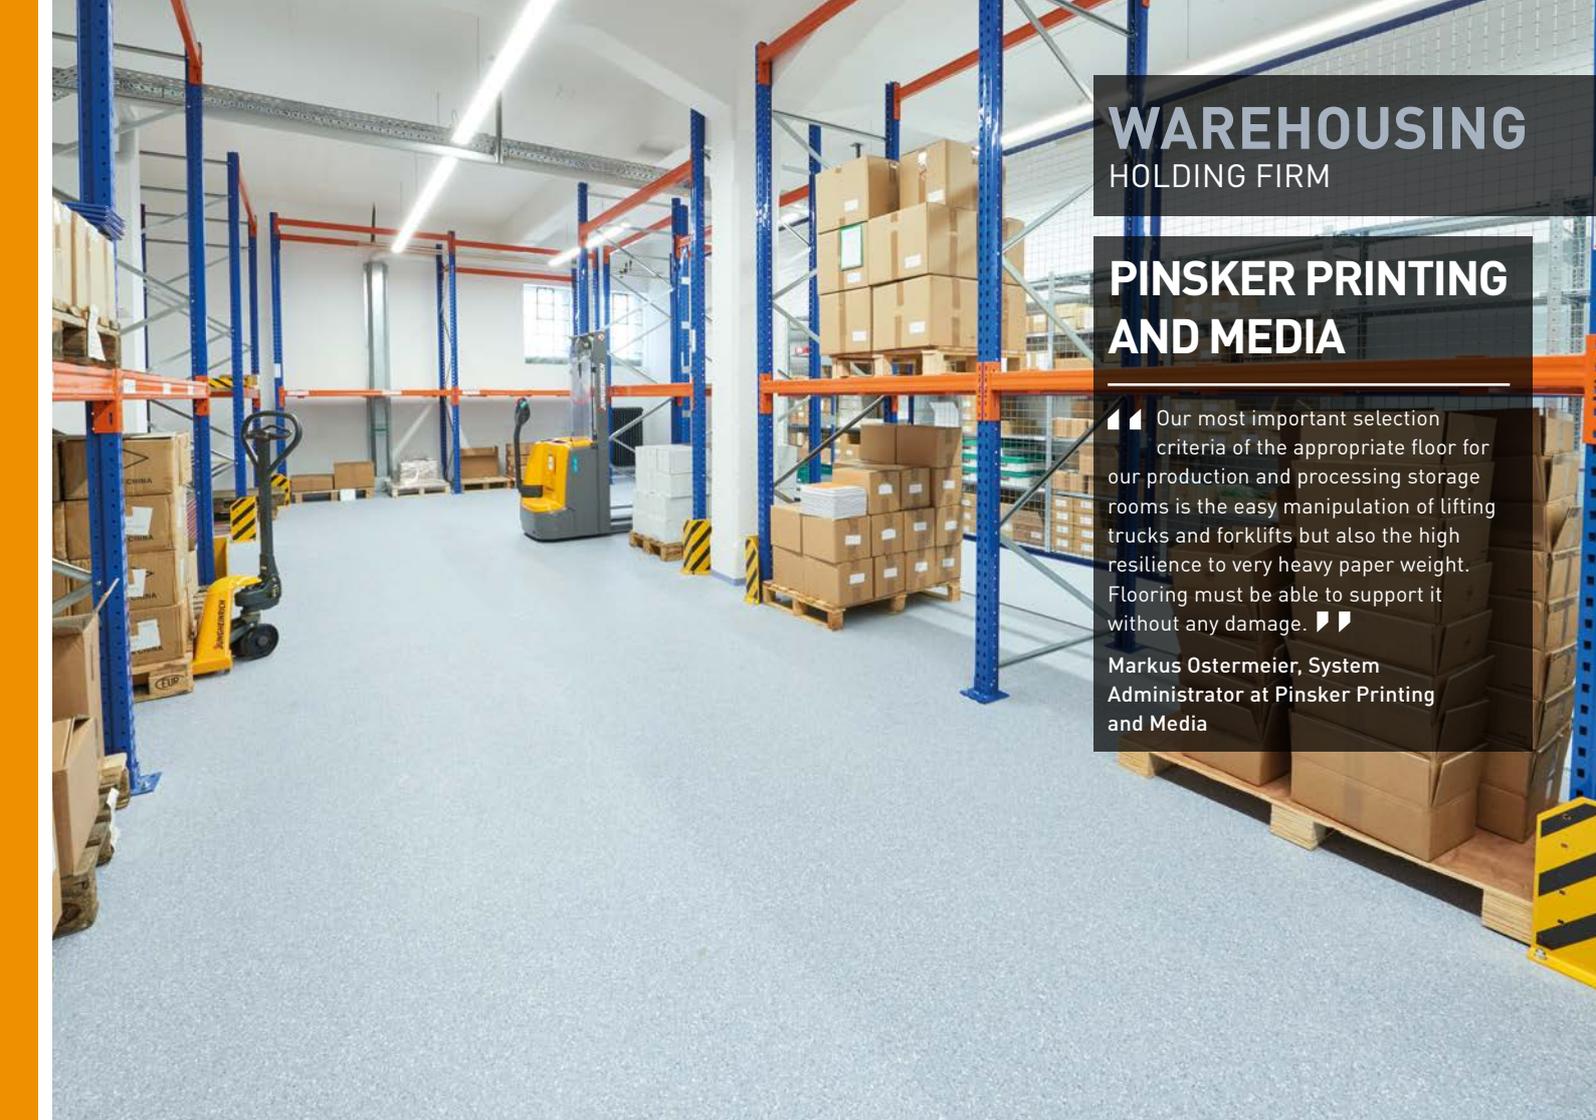

# WAREHOUSING HOLDING FIRM

## PINSKER PRINTING AND MEDIA

▀▀ Our most important selection criteria of the appropriate floor for our production and processing storage rooms is the easy manipulation of lifting trucks and forklifts but also the high resilience to very heavy paper weight. Flooring must be able to support it without any damage. ▀▀

Markus Ostermeier, System Administrator at Pinsker Printing and Media

# INDUSTRY

NON-STOP

## OPS-INGERSOLL

▀▀ The floor in our factory was an old stone pavement with many bumps and joints. The large-format GTI tiles were therefore a great help, they could be laid quickly and easily, while the production continued, without complex background preparation, without noise and dust development. ▀▀

Peter Stein, Management Board Member  
of OPS-INGERSOLL



# HOUSING

## YOU'RE COVERED

### DUDLEY MBC

---

▀▀ The Gerflor flooring looks great and seems very hardwearing, which is perfect for the communal areas of our low and high-rise blocks. Residents are very pleased with the installation time as it was completed within a day. We have specified the Gerflor Mipolam Classic range for about six years for our kitchens and bathrooms, and their Tarasafe Ultra H<sub>2</sub>O for the past eighteen months for our wet rooms. We needed something that was very robust, easy to clean and installed with minimum disruption. The Gerflor Attraction® range ticked all these boxes. ▀▀

Aziz Ahmed, Building Surveyor at Dudley Metropolitan Borough Council



# AIRPORTS

ENHANCE THE JOURNEY

## HEATHROW AIRPORT

When Heathrow Airport needed an attractive yet hardwearing floor for the extremely busy departure gates, they turned to Gerflor.

The fast track loose-lay GTI Max tiles are the perfect solution, the interlocking joints provide rapid, clean, cost-effective installation without the need for adhesive or specialist tools. With no drying time the area can be used immediately. Ideal for one of the world's busiest airports.



200M<sup>2</sup>  
8 HOURS - 2 PEOPLE



**HEALTHCARE**  
EASY TO LOOK AFTER

## **HÔPITAUX DRÔME NORD**

The hospital wanted to replace the flooring in the two main corridors that lead to the emergency departments. The flooring had to look great, be easy to maintain and long-lasting to deal with extremely heavy foot and wheeled traffic.


Closing to carry out installation of a new floor was not an option. To meet these constraints, GTI Max was ideal with its speedy loose-lay interlocking technology, once laid the floor can be used immediately.

**HOSPITALITY**  
LET ME ENTERTAIN YOU

## **MGM GRAND MACAU**

Behind the glamour of the casino floor there are a labyrinth of corridors and rooms that help to keep the resort functioning.

The flooring in these busy areas must withstand heavy foot traffic and rolling loads, it needs to be extremely hardwearing and easy to maintain. GTI Max tiles are the perfect solution, they can also be installed extremely quickly and with no adhesive the floor can be used immediately.

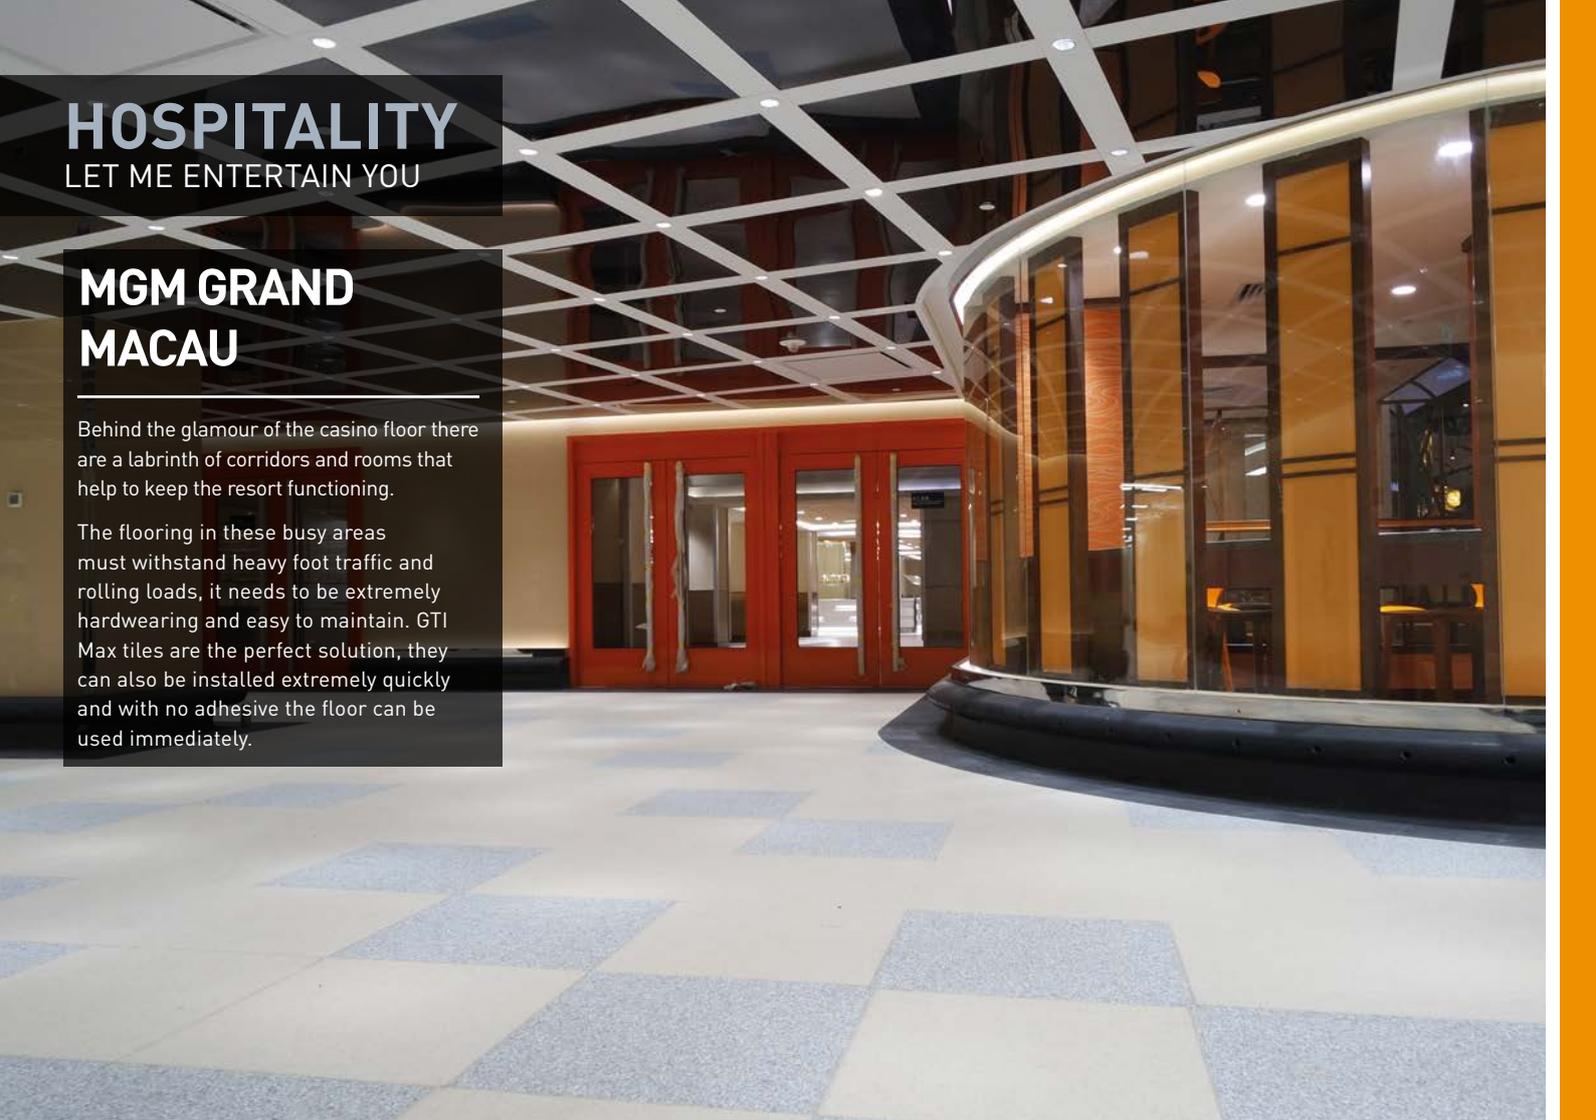

# AUTOMOTIVE

## HEAVY TRAFFIC AHEAD

Automotive environments are particularly demanding on the flooring. The ability to withstand the heaviest traffic including rolling loads and forklifts is a necessity.

The state of the art construction of GTI Max allows it to take a beating and still carry on performing and looking great!

Colour chips throughout the 2mm-thick, pure colour wearlayer hide scratches and provide heavy wear resistance.



# TECHNICAL INFORMATION

## ATTRACTION®

DESCRIPTION			
Total thickness	EN ISO 24346 [EN 428]	mm	5.00
Wearlayer thickness	EN ISO 24340 [EN 429]	mm	1.00
Weight	EN ISO 23997 [EN 430]	g/m <sup>2</sup>	7460
Size	EN ISO 24342 [EN 427]	mm	635 x 635
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 [EN 649]
European classification	EN ISO 10874 [EN 685]	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	<2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear group	EN 649	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.25
Residual indentation	EN ISO 24343-1 [EN 433]	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK
Thermal conductivity	EN ISO 10456 [EN 12 524]	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protacol®2
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	<10
Certification	-	-	Floorscore®
CE MARKING			
	EN 14041		
			

## GTI MAX

DESCRIPTION			
Total thickness	EN ISO 24346 [EN 428]	mm	6.00
Wearlayer thickness	EN ISO 24340 [EN 429]	mm	2.00
Weight	EN ISO 23997 [EN 430]	g/m <sup>2</sup>	9365
Size	EN ISO 24342 [EN 427]	mm	635 x 635 GTI
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 [EN 649]
European classification	EN ISO 10874 [EN 685]	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
Pendulum test	BS7976	-	Concrete emboss: Meets HSE guidelines
			Rice emboss: NO
PERFORMANCES			
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear group	EN 649	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.15
Residual indentation	EN ISO 24343-1 [EN 433]	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK
Shore Hardness	EN ISO 868	H <sub>D</sub>	≥ 55
Shifting resistance	CAHIER CSTB 3562	N/mm <sup>2</sup>	≥ 30
Thermal conductivity	EN ISO 10456 [EN 12 524]	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	<100
Certification	-	-	Floorscore®
CE MARKING			
	EN 14041		
			