



BEYOND THE NORM

As you are unique and each of your projects represents a new challenge, Gerflor gives you the chance to stand out.

One atmosphere, one style, one floor, but several possibilities...



3 POSSIBILITIES



Set the tone of your project by recolouring the design of your choice in our Taralay Impression range*

*20 designs available for colouring



Leave a big impression on the atmosphere that you create thanks to our unique collection of 50 designs that reflect the major decorative trends that are popular today.

All of our customisable designs: myfloorbygerflor.com



Enhance the visual identity of your company or that of your clients by printing a logo and/or your own designs.

my TARALAY IMPRESSION

Let's bring your inspiration to life together!



MARCO B.,

Architect

"I really like the dynamic feel created by the lines in the Nest design. In order to be able to incorporate it into my plans, I asked Gerflor to change the colour."



NEST

Enjoys designing IN THE PINK...

...while giving free rein to his CREATIVITY!



the possibility to recolour 20 designs in the Taralay Impression range as you wish









Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

*from among 20 eligible designs (see next page)

"STAR" DESIGN -STANDARD COLOUR SCHEME



CUSTOMISED COLOUR 1



CUSTOMISED COLOUR 2



Minimum order: 50 m² (special pricing system)



If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative



20 Taralay Impression designs available*



^{*}no recolouring of plain designs



SYCAMORE





SOPHIE A., Primary school head teacher

"Welcoming my pupils into a fun, original and warm environment every day really helps them develop! The children enjoy reading while sitting in the 'crazy field'."



CRAZY FIELD

Draws on an INSPIRING ENVIRONMENT...

... to express HER CREATIVITY!




the possibility to select from among 50 exclusive designs



Draw inspiration from Gerflor's 50 exclusive designs and change, if you so wish, the design's colour scheme on www.myfloorbygerflor.com



View your customised design on your computer screen before approving it



Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

4 major TRENDS



NATURE LAND

Subtle and elegant contrasts to create a gentle and peaceful atmosphere



FOLK

A bohemian and welcoming mix of styles



FUN

An explosion of colour and patterns for fun-loving and creative people



RETRONAUTE

An industrial look inspired by New York lofts: raw materials and sober colours




Minimum order: 50 m² (special pricing system)

If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative

NATURELAND

A return to basics and simplicity; these natural fibre designs create a relaxing atmosphere in which the colour green has several different tones.

Wood, minerals and air: let your projects breathe...

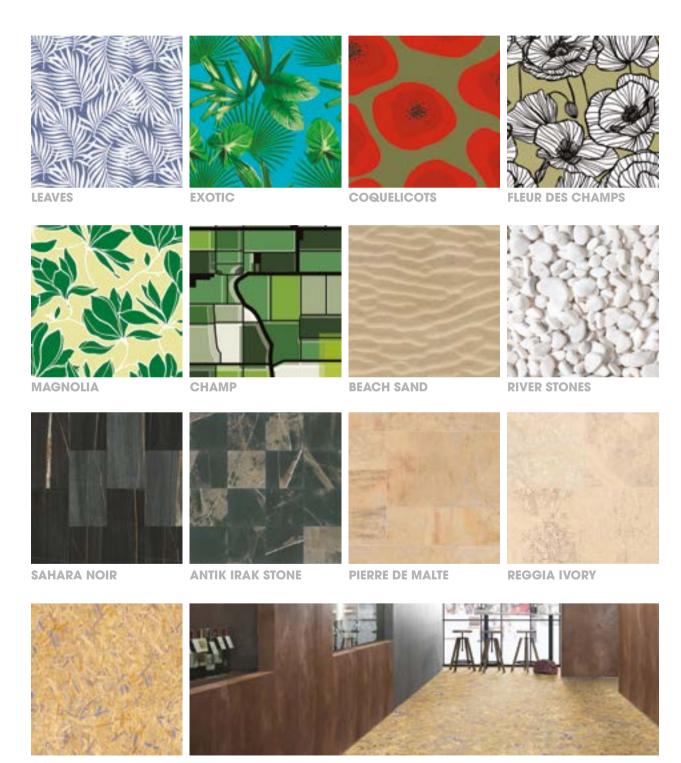

OSB

MAGNOLIA



CHAMP





LEAVES



EXOTIC

NATURELAND

BEACH SAND




RIVER STONES





SAHARA NOIR

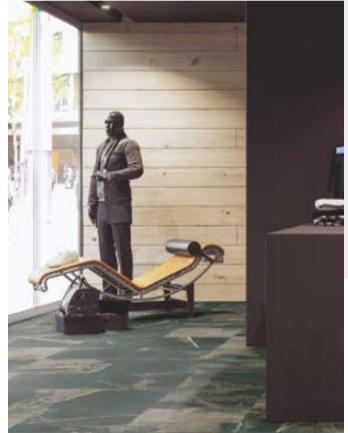

ANTIK IRAK STONE



PIERRE DE MALTE

NATURELAND







ENDLESS MOON ISLAND



BROWNIE



OAK



MIX WOOD



PINE WOOD



AUSTRALIANO



ENDLESS PORTOBELLO



WOOD AND STONES



WOOD AND STONES



PINE WOOD

TARALAY IMPRESSION



ENDLESS

Thanks to the use of digital printing, all of our wood designs are produced in six-metre-long pieces.

The repeat pattern effect is reduced to provide an even more realistic impression!




my TARALAY IMPRESSION

FOLK

A touch bohemian, these designs with geometric patterns and colour schemes inspired by popular folklore, ancient cultures and encounters with people around the world invite you to travel and to get away.

Your creativity knows no bounds.

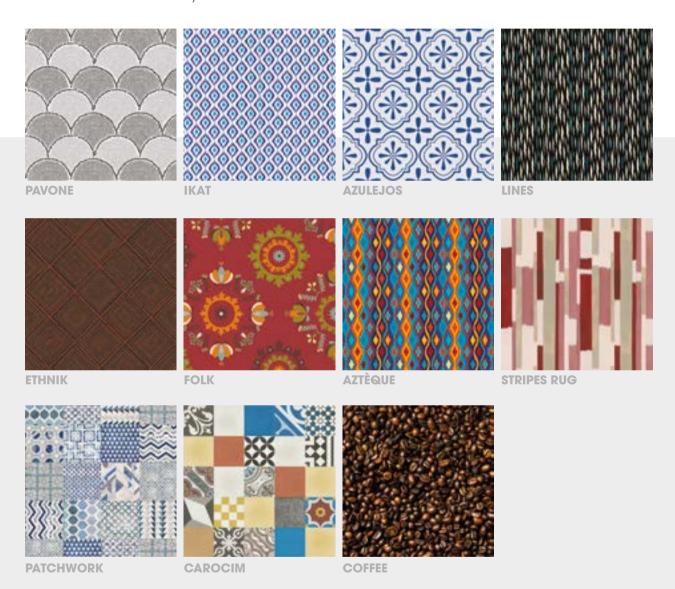

COFFEE









FOLK



CAROCIM

FOLK

AZULEJOS









PATCHWORK



ETHNIK

FUN

Fun or educational, these patterns will not leave anyone indifferent. Your range of options becomes an ocean of creativity and a veritable playground.



BALLS

VILLE









CIRCUIT TRAIN

FUN

CIRCUIT AUTO










GOLF GREEN



SEA WATER

RETRONAUTE


Take a trip down memory lane while retaining a resolutely modern atmosphere with a distinct character. Lines and patterns that take the best from the past to create eye-catching designs.

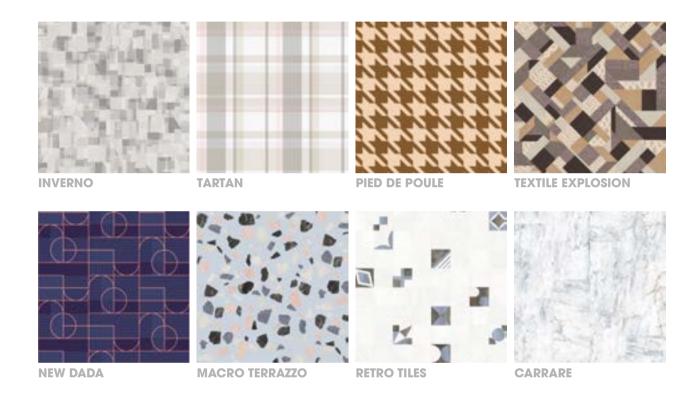




TEXTILE EXPLOSION

PIED DE POULE

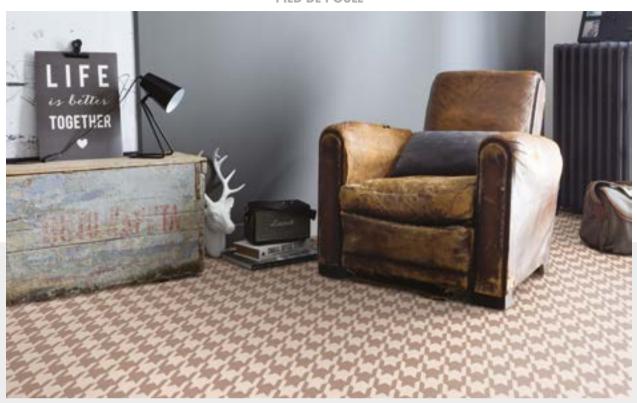



TARTAN

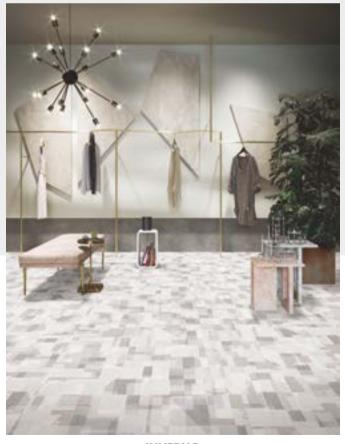

INVERNO

RETRONAUTE

MACRO TERRAZZO









RETRO TILES



NEW DADA



ISABELLE L., Art gallery manager

"I love to be able to create and match my gallery's floor with the work on show. Visitors are fully immersed in the artist's world!"



Her motto:

"An exhibition that is **EXCEPTIONAL...**

...should have a floor that is also

EXCEPTIONAL"



the possibility to make your floor unique



Send us your own file in accordance with the process described in our specifications



Approval by our technical team



Receive your floor sample within 10 days and before all of your floor is made



Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



File formats accepted



Files free from copyright only



300 DPI resolution



RAL, Pantone and NCS colour reference

To enhance the visual identity of your company or that of your clients, you can have your logo printed across the width of the roll.





- · No metallic ink
- · No printing on a plain background
- Design only across the width (2 m)
- No continuity of designs over several rolls

Minimum order: 50 m² (special pricing system)



If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative

All of the benefits of Taralay Impression

My Taralay Impression: construction and characteristics are identical to the Taralay Impression range



Unequalled stain resistance Easy clean

Protecsol 2 surface treatment (patented Gerflor technology)



Resistance to traffic & durable design



Made in France



Best indentation/acoustic performance on the market

COMPACT: 0.03 mm / 8 dB COMFORT: 0.08 mm / 19 dB



An ecologically responsible solution that contributes to air quality

100% recyclable product


TVOC emissions are 100 times lower than the normative requirements

MY TARALAY IMPRESSION COMPACT

2 3 4 5


- 1 Protecsol 2 surface treatment
- 2 Transparent wear layer
- 3 Printed design

My TARALAY IMPRESSION COMFORT



- 4 Fibreglass interlayer
- 5 Compact backing
- 6 Very high density PVC foam

All designs produced using digital printing have to be laid in the same direction.

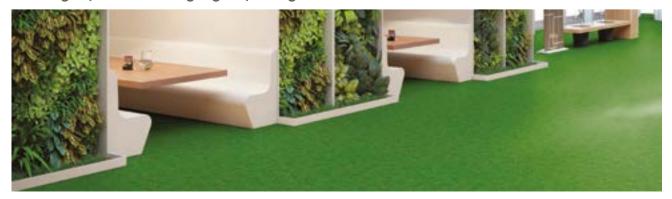

TARALAY IMPRESSION COMPACT - The floor covering selected is a reinforced, non-loaded, abrasion group T, multi-layer compact PVC floor covering, in rolls with a width of two metres, of the following type, TARALAY IMPRESSION COMPACT 33-43 [0.7 mm of wear layer]. It provides excellent resistance to indentation after static loading (0.03 mm) and sound insulation of 8 dB.

TARALAY IMPRESSION COMFORT - The floor covering selected is a multi-layer soundproof, reinforced, non-loaded, abrasion group T, PVC floor covering on a foam underlay, in rolls with a width of two metres, of the following type, TARALAY IMPRESSION COMFORT 33-43 (0.65 mm of wear layer). Reinforced by a VHD foam, it provides excellent resistance to indentation after static loading (0.08 mm) and sound insulation of 19 dB.

TARALAY IMPRESSION COMPACT & TARALAY IMPRESSION COMFORT - are made of mineral materials [27%] and renewable materials [26%]. They are free from formaldehyde, heavy metals, CMR 1 & 2, vPvB (very persistent and very bio-accumulative) and PBT (persistent, bio-accumulative and toxic) substances; GERFLOR products therefore comply with REACH. The TVOC emission level after 28 days (NF EN 16000) of the covering selected will be < 10 µg / m³ and is classified A+ (best class) as per health safety labelling. It is 100% recyclable and laying offcuts can be collected and recycled via Gerflor's Second Life Programme. They benefit from Protecsol® 2 surface treatment obtained by UV-laser cross-linking, thereby facilitating floor care and resistance to stains made by products such as Betadine and eosin (aqueous and alcoholic), hydro-alcoholic solutions or markers. They remove the need for any self-shine treatment or spray-based care during the entire lifetime of the product.

TARALAY IMPRESSION COMPACT and TARALAY IMPRESSION COMFORT are certified QB UPEC A+: U3P3E2/3C2 or U4P3E2/3C2.

TARALAY IMPRESSION COMPACT PLUS - The floor covering selected is a reinforced, non-loaded, abrasion group T, multi-layer compact PVC floor covering, in rolls with a width of two metres, of the following type, TARALAY IMPRESSION COMPACT PLUS 43. It has a wear layer of 0.9 mm. It provides excellent resistance to indentation after static loading (0.03 mm) and sound insulation of 8 dB.

It is made of mineral materials (27%) and renewable materials (26%). It will be free from formaldehyde, heavy metals, CMR 1 & 2, vPvB (very persistent and very bio-accumulative) and PBT (persistent, bio-accumulative and toxic) substances; GERFLOR products therefore comply with REACH. The TVOC emission level after 28 days (NF EN 16000) of the covering selected will be < 10 µg / m³ and will be classified A+ (best class) as per health safety labelling. It is 100% recyclable and laying offcuts can be collected and recycled via Gerflor's Second Life Programme. It benefits from Protecso(@ 2 surface treatment obtained by UV-laser cross-linking, thereby facilitating floor care and resistance to stains made by products such as Betadine and eosin (aqueous and alcoholic), hydro-alcoholic solutions or markers. It removes the need for any self-shine treatment or spray-based care during the entire lifetime of the product.

TARALAY IMPRESSION COMPACT is certified NF UPEC: U3P3E2/3C2 or U4P3E2/3C2.



Avoid any items or parts of items made of rubber liable to come into direct contact with our coverings (chair tips, furniture, etc.) and only use PVC or Polyethylene tips. In the case of Protecsol® and/or PROTECSOL® 2 materials, never use abrasive disks (green, brown or black) or any procedure that risks damaging the surface treatment (abrasive products, solvents, etc.). Detailed installation guidelines, accessories (profiles, skirting) and cleaning instructions: available on request.

The information in this document is valid from 01/10/2018 and is subject to change without prior notice. In the face of continuous technical improvements, before starting any work, our customers should check with us that this document is still in force.

*Information about the emission level of volatile substances in indoor air, involving a toxic risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions)			Taralay Impression		Taralay Impression	
			Comfort		Compact	
DESCRIPTION			33	43	33	43
Total thickness	EN ISO 24346 (EN 428)	mm	3.25	3.35	2.00	2.00
Vear layer thickness	EN ISO 24340 (EN 429)	mm	0.59	0.65	0.63	0.70
Veight	EN ISO 23997 (EN 430)	g/m²	2,725	2,825	2,535	2,635
Roll width	EN ISO 24341 (EN 426)	cm	200	200	200	200
Roll length	EN ISO 24341 (EN 426)	ml	25	25	25	25
LASSIFICATION						
Standard / Product specification	-	-	EN 651	EN 651	EN ISO 10582 (EN 649)	EN ISO 10582 (EN 649)
uropean classification	EN ISO 10874 (EN 685)	Class	33 - 42	34 - 42	33-42	34-43
JPEC classification	NF 189	Classification	U3P3E2/3C2	U4P3E2/3C2	U3P3E2/3C2	U4P3E2/3C2
Certification QB UPEC A+	QB 30	Certificate no.	301-030.2	301-031.2	301-032.2	301-033.2
mpact sound insulation	EN ISO 717-2	dB	19	19	-	-
Valking noise	NF S 31 074	dB	< 65	< 65	-	-
ire behaviour	EN 13501-1	Class	B _{fl} -s1	Bfl-s1	Bfl-s1	Bfl-s1
tatic electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
lipperiness (1)	DIN 51130	Class	R10	R10	R10	R10
ERFORMANCE						
Vear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
brasion group	EN 651 / (EN 649)	Group	T	T	T	T
Binder content	EN ISO 10582	Туре	-	-	I	I
mpact sound insulation	EN ISO 717-2	dB	-	-	8	8
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.20	≤ 0.20	≤ 0.10	≤ 0.10
ndentation: average value measured	-	mm	≈ 0.08	≈ 0.08	≈ 0.03	≈ 0.03
Vheelchair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK	OK
hermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.K)	0.25	0.25	0.25	0.25
ight-fastness	EN 20 105 - B02	Degree	≥ 6	≥ 6	≥ 6	≥ 6
urface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2
hemical resistance (2)	EN ISO 26987 (EN 423)	-	0K	OK	OK	OK
ntibacterial activity E. coli - S. aureus - MRSA) (3)	ISO 22196	-	> 99% does not promote proliferation			
NVIRONMENT / INDOOR AIR QUALITY			proliferation	proliferation	prouteration	prouteration
VOC after 28 days	ISO 16000-6	μg/m³	< 10	< 10	< 10	< 10
Pertification	150 10000-0	ру/т	V 10	Floorscore®		Floorscore®
E MARKING				1 (00) 3(0) 6		100130016
CC	EN 47074			B		
(6	EN 14041	-		Bn-s1		B _{th} st

(1) Only the TARALAY SECURITE & TARASAFE ranges offer slip-resistance over the lifetime of the product. / (2) The chemical resistance table can be downloaded on our website. (3) Compliance with floor care protocols is the best guarantee against infections.

ASIA: Gerflor Asia

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119 e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218 e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14 e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International Tel: +1 438 333 0752 - Fax: +1 438 380 5425 e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd. Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998 e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor Oy Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152 e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:

e-mail: contactfrance@gerflor.com

GERMANY: Gerflor Mipolam GmbH Tel: +49 (0)22 41-25 30-0 e-mail: gerflormipolam@gerflor.com Kunden-Service Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100 e-mail: kundenserviceßgerflor.com SAT Service und Anwendungstechnik tel: +49 (0)22 41-25 30 555 - Fax: +49 (0)22 41-25 30 550 e-mail: technik@gerflor.com

IRELAND: Gerflor Ltd Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759 e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A. Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84 e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina Tel: +55 11 38 48 20 20 e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East Tel: +966 13 847 1779 - Fax: +966 13 847 1781 e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89 e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International Tel: +33 [0]4 74 05 40 00 - Fax: +33 [0]4 74 05 03 13 e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33 e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44 e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao Tel./Fax: + 7 495 785 23 71 e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s. Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80 e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflorom

UNITED KINGDOM: Gerflor Ltd Sample service: Contractuk@gerflor.com Office Tel: + 44 [0] 1926 622 600 - Fax: + 44 [0] 1926 401 647

USA: Gerflor North America Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753 e-mail: info@gerflorusa.com

gerflor.com

ARCHITECTURE DECORATION SPORT TECHNOSPECIFIC

Gerflor.

Be connected!















#Gerflor

GERFLOR, **ECO-RESPONSIBLE SOLUTIONS**



COMPOSITION

100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent



RECYCLED CONTENT

25% average recycled content 100% REACH compliant recycled content



RECYCLABILITY 100% recyclable product

TVOC emissions bet



INDOOR **AIR QUALITY**

10 and 100 times better than norms requirements Floorscore certified No formaldehyde emission



INSTALLATION Innovative adhesive

free installation



LCA - Eco-designed according to a product specific Life Cycle Analysis - Product specific EPD (Environmental Products Declaration) available - Manufactured in an Iso 14001 and Iso 50001 certified site - Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)



WELLNESS

Health: Antibacterial activity (inhibits growth > 99%) Safety: Anti slip performance Comfort: Walking comfort and impact noise reduction



