


REZILLSLEEPER - FLOATING SYSTEM

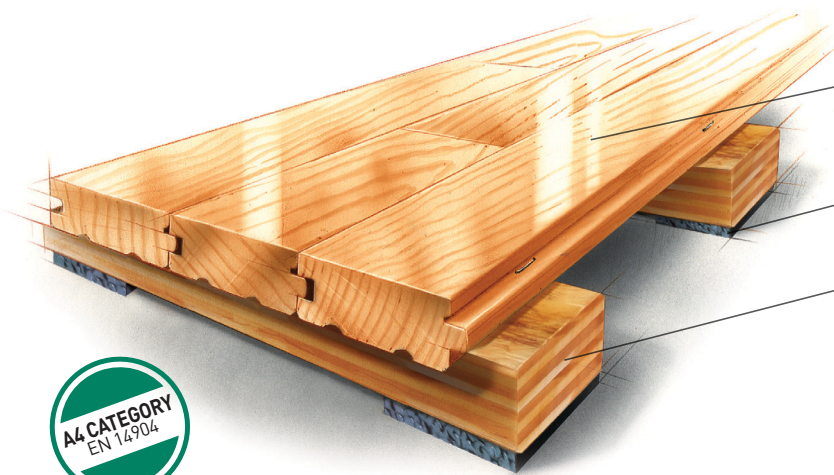

FLOORING

North American Maple
Thickness 20mm / Width 57mm

RESILIENCE

12mm Rezill pads


SUBFLOOR CONSTRUCTION

Plywood sleepers
Thickness: 24mm / length of each sleeper: 2.44m



Recycled Contribution:
RezillSleeper Subfloor System includes components with recycled content

ONE MATERIAL, THREE NATURAL GRADES

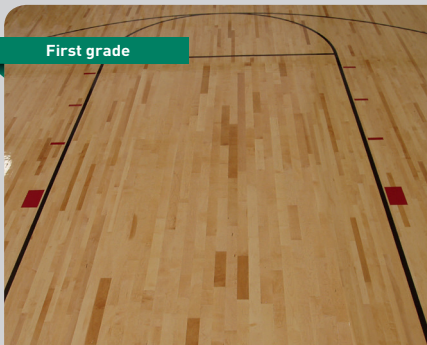


PARTNER OF MAJOR SPORTS EVENTS



REZILLSLEEPER SYSTEM FLOATING SYSTEM



- 1 Vented Cove Base (76 mm x 102 mm)
- 2 Expansion Space (51 mm)
- 3 Maple (20 mm x 57 mm)
- 4 Rezill Sleeper
- 5 Vapor Barrier
- 6 Rezill Pad

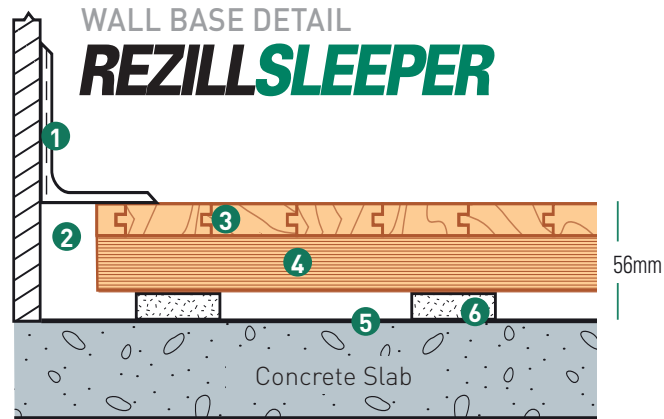

PRODUCT CHARACTERISTICS

STANDARD	REQUIREMENT	UNIT	RESULTS	
PRODUCT DESCRIPTION				
Finish Flooring	-	-	Hardwood Maple Strip Flooring	
Sub-Floor	-	-	Plywood sleepers 2.44 m x 7.62 cm x 2.46 cm	
-	-	-	Rezill R4 pads: 5.08 cm x 5.08 cm x 1.27 cm and polyurethane bound compressed rubber fibers	
Thickness	EN 428	mm	56	
Weight	EN 430	kg/m ²	21	
SPORT PROPERTIES				
Shock absorption	EN 14808	≥ 25	%	56.2
Vertical deformation	EN 14809	≤ 5	mm	2.4
Sliding coefficient	EN 13036-4	80 to 110	-	83
Ball bounce	EN 12235	≥ 90	%	96
TECHNICAL CHARACTERISTICS				
Abrasion resistance	EV ISO 5470-1	≤ 0.08	g	0.07
Impact resistance	EN 1517	≥ 8	-	No damage
Indentation resistance	EN 1516	≤ 0.5	-	No damage
Resistance to rolling load, 1500 N	EN 1569	-	-	✓
CLASSIFICATION				
Fire	EN 13501-1	-	-	
DECLARATION OF PERFORMANCE				
-	-	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load Resistance to wear