



**IN STOCK
FOR FAST
DELIVERY**

Woods & Minerals

Inspirational designs
Durable & hardwearing
Ideal for fast track installations


Adhesive Free

TARASAFE IMPRESSION hop

Class 34

Looselay Safety Flooring

Tarasafe Impression hop

Looselay Safety Flooring



Tarasafe Impression hop

The **Tarasafe Impression hop** Collection is a stunning looselay, vinyl safety flooring range that comprises of realistic wood and mineral finishes. It is suitable for heavy traffic areas, and is ideal for many contract applications in healthcare, education, retail and other markets.

It is available in Wood and Mineral finishes and offers Safety in Numbers, PTV 36+ slip resistance, R11 wet slip resistance rating and >20 Rtm/Rz surface roughness in accordance with HSE guidelines. The revolutionary ProtecSol® Control surface treatment ensures no polish for the entire lifetime of the product.

This innovative, looselay solution is an eco-friendly and fast track product. Suitable for installing on floors up to 97% RH**, requires no adhesives with minimal disruption on site, and can be laid over most existing floorcoverings.

Tarasafe Impression hop is a sustainable choice for new build and renovation projects. It contains up to 20% recycled content and can be easily removed and re-used or recycled at end of life.



Anti bacterial activity against MRSA of 99% after 24h00.





Easy to clean and maintain thanks to the innovative surface treatment.



The sustainable and eco-friendly looselay safety flooring solution.

Tarasafe Impression hop

Description			
Total thickness	EN ISO 24346	mm	2.30
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m ²	3125
Width/Length of sheet	EN ISO 24341	cm/ lm	200/20
Classification			
Norm/Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance: Pendulum Test	EN 16165:2021 - Appendix C (BS 7976-2)	PTV	> 36
Surface roughness	-	µm	Rz ≥ 20
Slip resistance : Ramp test	EN 16165:2021 - Appendix B (DIN 51130)	class	R11
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	QB 30	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Residual indentation (average measure)	-	mm	≈ 0.03
Castor chair test (type W)	EN ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	ProtecSol® Control
Chemical products resistance	EN ISO 26987	-	OK
Anti-bacterial activity (MRSA) ⁽¹⁾	ISO 22196	-	> 99% Inhibits growth
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10
Certification	-	-	Floorscore®
CE marking			
	EN 14041		

⁽¹⁾ The implementation of an effective cleaning method is the best defence against infection.

**Installation guidelines must be followed.

Uniclass Pr_35_57_71_61	
CI / Sfb	(43) n6
UK reference	September 2024



Installation and Maintenance Guidelines, as well as complementary ranges available on our Gerflor website.



IMPORTANT: The information contained in this document is valid from 01/09/2024 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force. Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

we care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT**
-20 % kg CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution

Tarasafe Impression hop

The most popular Tarasafe Impression designs are now available in a looselay format. Eco-design is implemented at each stage of the product life cycle. Ideal for new build and renovations, when time is of the essence.

Faster installation and removal times

IN STOCK NOW

Tarasafe Impression hop

High performance looselay vinyl safety flooring for contract applications


- 2M** Compact sheet
- 97% RH** Improved resistance to moisture
- Adhesive Free**
- R11** Slip Resistant
- HSE 36+** Slip Resistant
- 20 Rtm/Rz** Roughness
- Heavy traffic** Rolling loads up to 500kg
- T** Wear group
- PUR Protecso[®] CONTROL** Treated

SAFETY FLOORING

Sustainable Credentials



Product Innovation

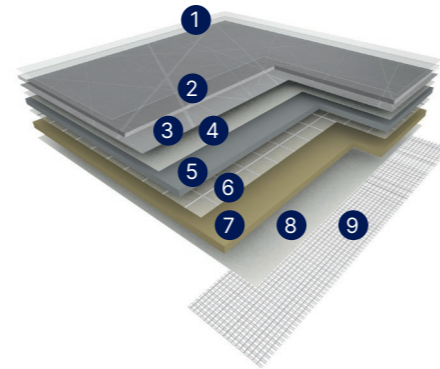

- 1 Protecso[®] Control surface treatment
- 2 Transparent wear layer
- 3 Design
- 4 Fibreglass
- 5 Compact interlayer
- 6 Glass fibre grid
- 7 Calendered layer with recycled content
- 8 Technical underlayer
- 9 hop Reinforced holding Tape

A sustainable choice



100% recyclable
Up to 20% recycled content




REACH compliant



VOC < 10 µg/m³



0543 Brescia
LRV: 34.0

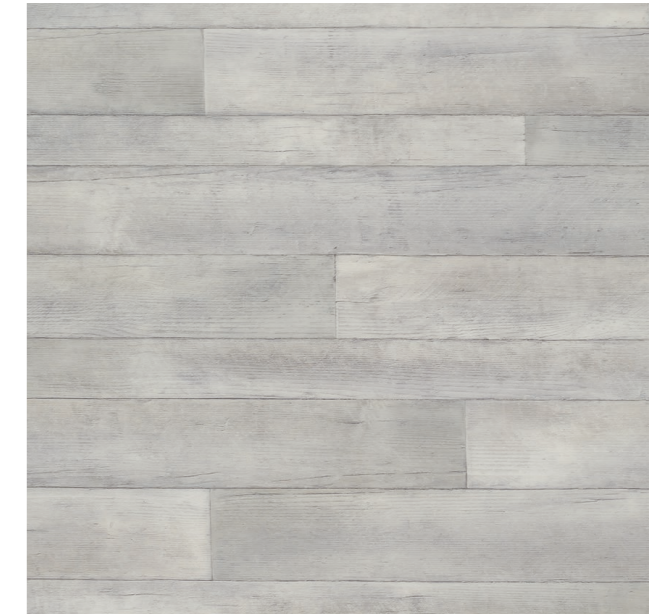

0672 Loft White
LRV: 44.8



0525 Modena
LRV: 13.8



0519 Noma Beige
LRV: 30.2



1069 Habana 3D Trinidad
LRV: 23.8



1070 Habana 3D Vinales
LRV: 38.5



Scan here for matching WELD RODS

LRV: Light Reflectance Value

To achieve product performance installation guidelines must be followed.

The sustainable looselay solution that is easy and fast to install and saves you time and money



Don't forget to order your hop reinforced holding tape!



Quick and easy to install

- Reduce downtime with faster installations
- Quick & easy to uplift, no damage to the surface underneath



Adhesive free

- Less disruption and reduced downtime on site
- Can be installed on most existing floorings*



Improved resistance to moisture

- Suitable for up to 97% Relative Humidity (RH)**
- Ideal for new build projects requiring fast turnaround



Can be walked on immediately

- Less disruption & down time during installation
- Heavy foot traffic, rolling loads up to 500kg



Install over underfloor heating

- Suitable for use with underfloor heating
- Works up to 75% Relative Humidity (RH) / 2 CM% or less



A valued second life

- Easy to re-use and re-install
- 100% recyclable

* including asbestos vinyl tiles - detailed installation guidelines on our website
** Installation guidelines must be followed

Gerflor