


TARAFLEX® MULTI-USE 6.2

DESIGNED FOR MULTI-USE ACTIVITIES

Taraflex® Multi-Use 6.2 offers superior resistance to furniture and rolling loads found in multi-use gyms, while providing properties like shock absorption and comfort for athletes, so there's no need to compromise.

- ▶ ASTM F2772 Class 2: ≥ 22% - < 33% shock absorption
- ▶ Ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 52%
- ▶ Featuring Taraflex® Triple Strength Fiberglass: CXP HD+
 - Superior dimensional stability to rolling loads typically found in multipurpose rooms
- ▶ Exclusive wood designs

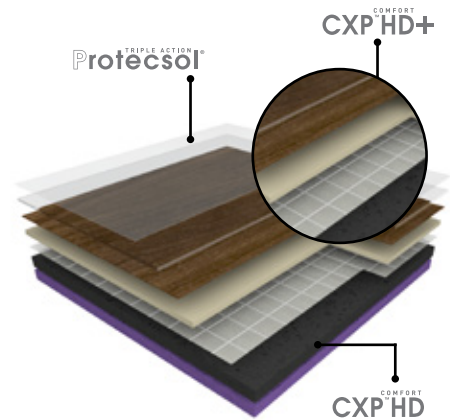













THICKNESS




6.2 mm



IPI = 52%

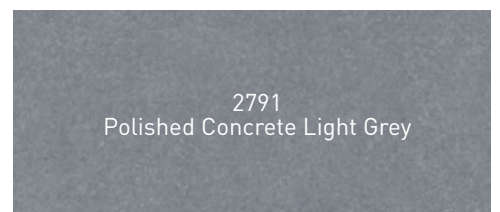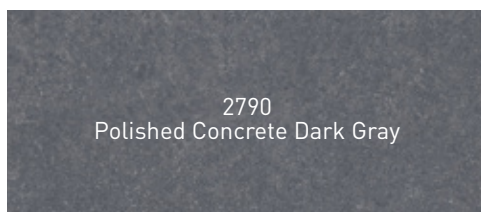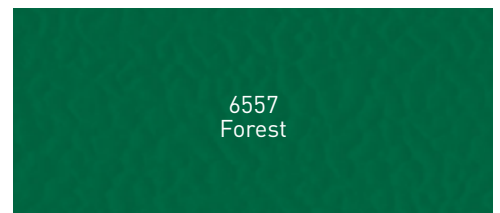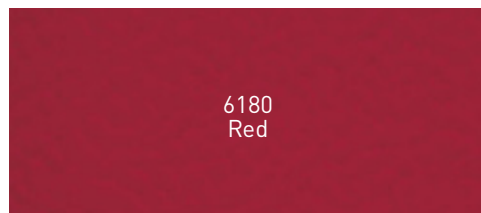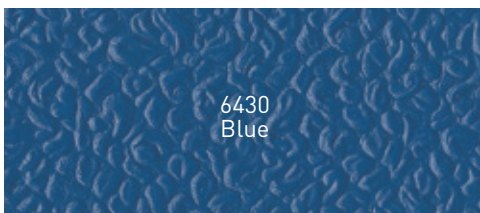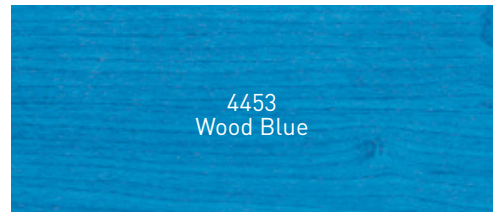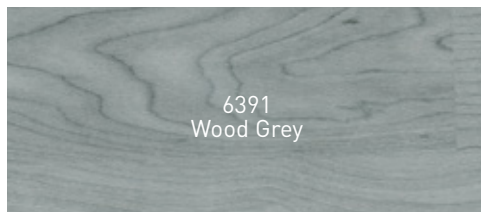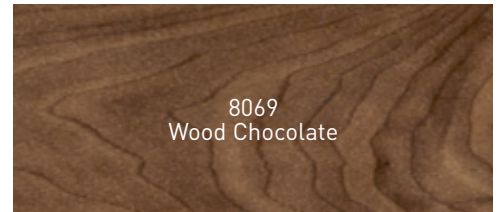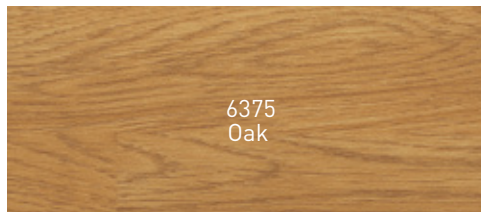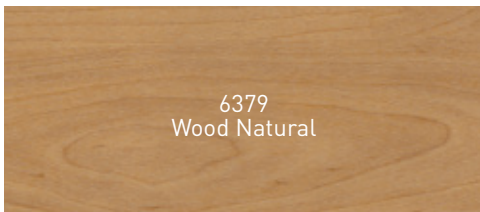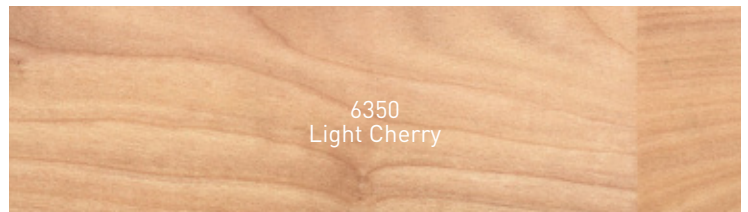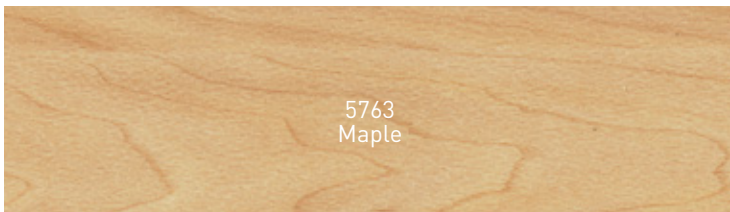

TARAFLEX® MULTI-USE 6.2

DESCRIPTION		STANDARDS	REQUIREMENTS	TARAFLEX® MULTI-USE 6.2
PRODUCT DESCRIPTION				
Surface Complex		-	-	D-Max ^{DURABILITY}
Foam Backing		-	-	Double Density CXP HD+ ^{COMFORT}
Total Thickness		-	-	0.244" (6.2 mm)
Wearlayer Thickness		-	-	0.08" (2.1 mm)
Weight		-	-	0.86 lb/ft ² (4.2 kg/m ²)
Roll Width		-	-	4' 11" (1.5 m)
Roll Length	Wood Designs	-	-	67' 3" (20.5 m)
	Solid Colors	-	-	-
	My Taraflex	-	-	67' 3" (20.5 m)
SPORT PROPERTIES				
Sport Properties		ASTM F2772	Class 1	Class 2
Shock Absorption (Safety)		ASTM F2772	≥ 10%	≥ 22% - ≤ 33%
Vertical Deformation		ASTM F2772	≤ 0.12" (≤ 3 mm)	≤ 0.078" (≤ 2 mm)
Sliding Effect		ASTM F2772	80 - 110	80 - 110
Ball Rebound		ASTM F2772	≥ 90%	≥ 96%
Impact Protection Index (IPI)		IPI	-	52%
Anti-Friction Burns		-	-	Protectsol ^{TRIPLE ACTION}
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance		ASTM D543	-	Excellent
Resistance to a Rolling Load		EN 1569	≥ 1500 N	≥ 1500 N
Fire Rating		ASTM E648	Class 1	Class 1
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance		-	-	Protectsol ^{TRIPLE ACTION} / No-wax for life
Restricted Use of Harmful Chemicals		MRC4 LEED v4	-	100% REACH Compliant
Naturally Bacteriostatic*		ISO 22196	-	Inhibits the growth of bacteria
Allergen-Free		-	-	100% Allergen-Free
Indoor Air Quality		EQc2 LEED v4	-	FloorScore® Certified
Recycled Content		MRC3 LEED v4	-	20%
INSTALLATION METHOD				
Full-Spread Adhesive		ASTM F2170 (F1869)	Gerfix TPS+: ≤ 95% RH (≤ 10 lb) Gerfix Spray: ≤ 95% RH (≤ 8 lb)	
Loose-Lay Installation		ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT
WARRANTY		15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions **15-year no moisture failure and anti-mold warranty for Gerflor Dry-Tex System		

*The implementation of an effective cleaning method is the best defense against the spread of infections.

