



## TARAFLEX® SPORT M PERFORMANCE

MADE FOR COMPETITIVE SPORTS LEVEL

Taraflex® Sport M Performance is the outcome of more than 60 years' experience.

- ▶ ASTM F2772 Class 3:  $\geq 34\%$  -  $< 46\%$  shock absorption
- ▶ Ball bounce:  $\geq 96\%$
- ▶ Impact Protection Index (IPI): 82%
- ▶ Dual density foam
- ▶ Provides superior safety and shock absorption
- ▶ Triple-Action **Protēcsol** for anti-friction burns
- ▶ Great for permanent and portable volleyball courts
- ▶ Available with Dry-Tex™ System for the highest moisture tolerance: 100% RH (25 LB)
- ▶ Available with Taraflex® Triple Strength Fiberglass: **D-Max+**

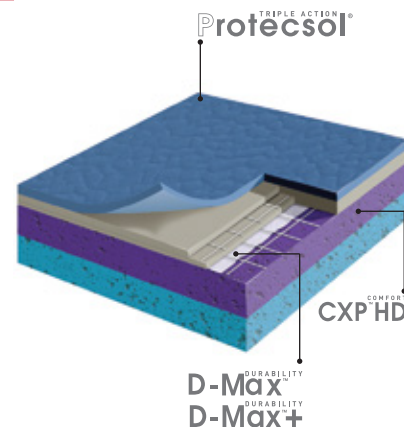




# TARAFLEX® SPORT M PERFORMANCE

COMFORT CXP<sup>HD</sup> DURABILITY D-Max™ DURABILITY D-Max+™

MADE FOR COMPETITIVE SPORTS LEVEL

TRIPLE ACTION™  
Protēcsol®

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
<b>PRODUCT DESCRIPTION</b>				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	<b>D-Max™ / D-Max+™</b>	
Foam Backing	-	-	Double Density CXP <sup>HD</sup>	
Total Thickness	-	-	0.35" (9 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	1.1 lb/ft <sup>2</sup> (5.4 kg/m <sup>2</sup> )	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86'6" (26.4 m)	67'3" (20.5 m)
<b>SPORT PROPERTIES</b>				
Sport Properties	ASTM F2772	Class 1	Class 3	
Safety	ASTM F2772	≥ 10%	≥34% - <46%	
Vertical Deformation	ASTM F2772	≤ 0.12" (≤ 3 mm)	≤ 0.12" (≤ 3 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	82%	
Anti-Friction Burns	-	-	Protēcsol®	
<b>TECHNICAL CHARACTERISTICS</b>				
Chemical Product Resistance	ASTM D543	-	Excellent	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
<b>ENVIRONMENT HEALTH &amp; SAFETY</b>				
Ease of Maintenance	-	-	Protēcsol® / No wax for life	
Restriction Use of Harmful Chemicals	Mrc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	Mrc3 LEED v4	-	18%	
<b>INSTALLATION METHOD</b>				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 95% RH (≤ 10 lb)		
Gerflor Dry-Tex System	ASTM F2170 (F1869)	100% RH (≤ 25 lb)		
Eco-Fit™ System	-	-		
<b>WARRANTY</b>	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			