


## TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE USE

Taraflex® Sport M Plus provides excellent levels of comfort and safety suited to all types of sports combined with some multipurpose activities.

- ▶ ASTM F2772 Class 3
- ▶ Superior Indentation Resistance: Improved shock absorption without sacrificing indentation resistance
- ▶ Absorption ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 76%
- ▶ Dual density foam
- ▶ No-wax for life—ease of maintenance
- ▶ Available with Gerflor Dry-Tex System
  - ▶ Highest moisture tolerance: 100% RH (25 lb)
  - ▶ Up to 70% cost savings compared to third party mitigation systems
  - ▶ Full-spread adhesive installation method: no risk of mold

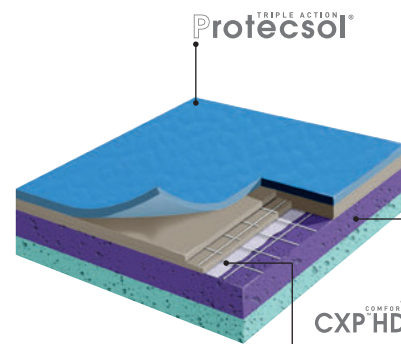



D-Max DURABILITY

3764 Taupe	6758 Silver Gray	6873 Anthracite	6211 Gold	6146 Coral
6038 Terracotta	6159 Pink	6180 Red	6559 Spring	6570 Mint Green
6557 Forest	2404 London Light Blue	6445 Lagoon	6431 Teal	6430 Blue
6830 Black	0012 Navy Blue	6457 Blueberry	7755 Pure Concrete	4537 Basketball Pattern
7422 Blue Wave	5763 Maple	6375 Oak	6350 Light Cherry	6391 Wood Grey
7019 Wood Crosscut	7020 Golden Herringbone	4536 Wood Dark Blue	6390 Wood Red	4535 Wood Forest Green

# TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE

COMFORT CXP HD DURABILITY D-Max™ TRIPLE ACTION® ProtecSol

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
<b>PRODUCT DESCRIPTION</b>				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	<b>D-Max™</b>	
Foam Backing	-	-	Double Density <b>CXP HD</b>	
Total Thickness	-	-	0.30" (7.5 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	0.95 lb/ft <sup>2</sup> (4.6 kg/m <sup>2</sup> )	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86' 6" (26.4 m)	67' 3" (20.5 m)
<b>SPORT PROPERTIES</b>				
Sport Properties	ASTM F2772	Class 1	Class 3	
Safety	ASTM F2772	≥10%	≥34% - <39%	
Vertical Deformation	ASTM F2772	≤ 0.138" (≤ 3.5 mm)	≤ 0.078" (≤ 2 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	73%	
Anti-Friction Burns	-	-	<b>ProtecSol™</b>	
<b>TECHNICAL CHARACTERISTICS</b>				
Chemical Product Resistance	ASTM D543	-	Meets Requirements	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
<b>ENVIRONMENT HEALTH &amp; SAFETY</b>				
Ease of Maintenance	-	-	<b>ProtecSol™</b> / No-wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	100% REACH Compliant	
Naturally Bacteriostatic	ISO 22196	-	Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	FloorScore®	
Recycled Content	MRc3 LEED v4	-	30%	
<b>INSTALLATION METHOD</b>				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 95% RH (≤ 10 lb)		
Gerflor Dry-Tex System	ASTM F2170 (F1869)	100% RH (≤ 25 lb)		
<b>WARRANTY</b>	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			