



Tarasafe

Standard - H₂O - Ultra

Ultra H₂O - Super

Gerflor[®]

Tarasafe Safety Floorings

Performances



Non-absorbent, watertight and waterproof



Resistant to high traffic



Excellent abrasion resistance



Resistant to impact, heavy loads, indentation

Installation



Light and easy to handle



Flexible and easy to install



Easier to cut

Maintenance



Very low maintenance needed
It is not necessary to seal the floor during its lifetime

Eco-responsible solutions




Excellent indoor air quality



Raw and recycled materials
100% REACH compliant

CLEAN CORNER SYSTEM An innovative corner system

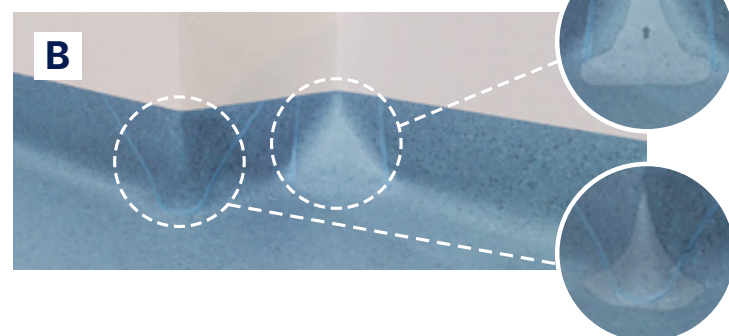


Gerflor's Clean Corner System is a patent pending, innovative corner solution which is supported by years of research and development (system is only available with Gerflor floors). With ultra-resistant and versatile profiles (picture A) **Clean Corner System** can be used for all your projects with a perfect result (picture B).

- 1 External angle is covered by the respective pending patent applications: WO2016/005695 A1, FR3023313
- 2 Internal angle is covered by the French pending patent application FR3013065




Tarasafe Standard

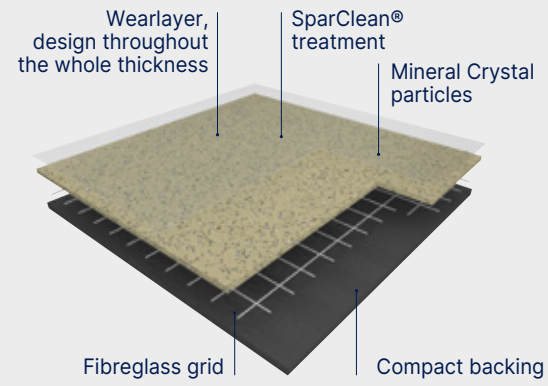


R10 Slip Resistant
P4 Slip Resistant
T Wear group
SparClean® Treated

Tarasafe H₂O

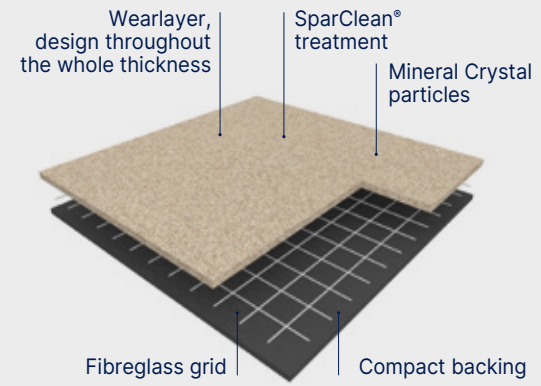


R11 Slip Resistant
P5 Slip Resistant
T Wear group
SparClean® Treated
 Suitable for both barefoot and shod use

Tarasafe Ultra

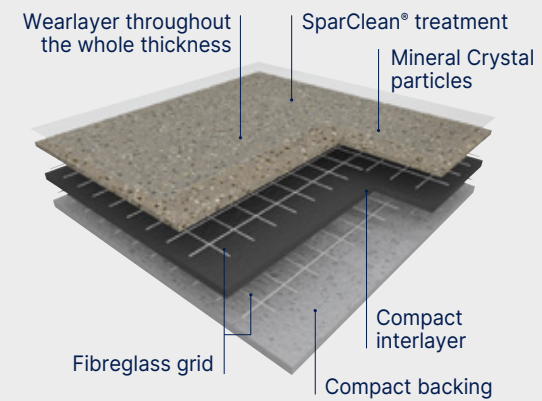


R10 Slip Resistant
P4 Slip Resistant
T Wear group
SparClean® Treated

Tarasafe Ultra H₂O

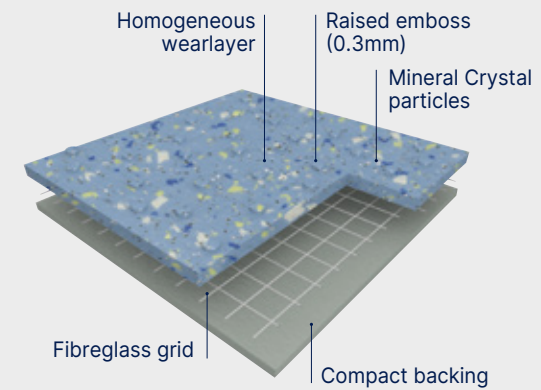


R11 Slip Resistant
P3 Slip Resistant
P Wear group
 Suitable for both barefoot and shod use

Tarasafe Super

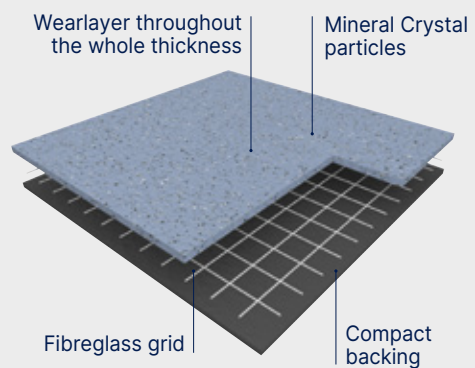

R12 Slip Resistant
P5 Slip Resistant
T Wear group

Tarasafe Ultra H₂O



R11 Slip Resistant
P3 Slip Resistant




High performance slip resistant safety flooring for wet and dry, barefoot and shod applications.

Easier to install, lighter & more flexible to handle


Easier to cut – up to 5 x more blade life

Matte surface finish for an improved design experience


Contains 39% recycled content
 100% recyclable

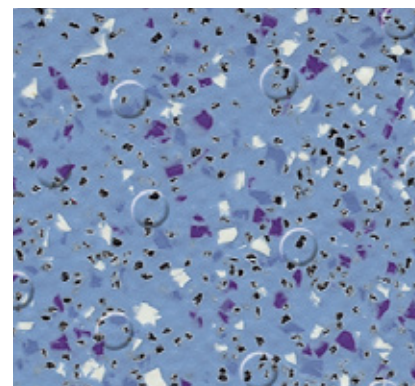


7413 Ocean Blue
 NCS: 3030-R90B / LRV: 31.8

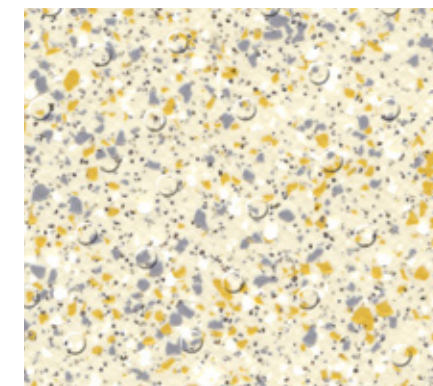


7325 Seashore
 NCS: 1005-Y20R / LRV: 63.0

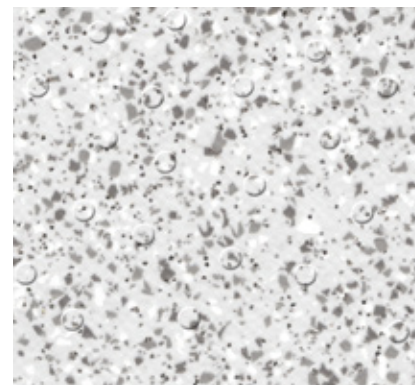

7720 Iceberg
 NCS: 1500-N / LRV: 60.6

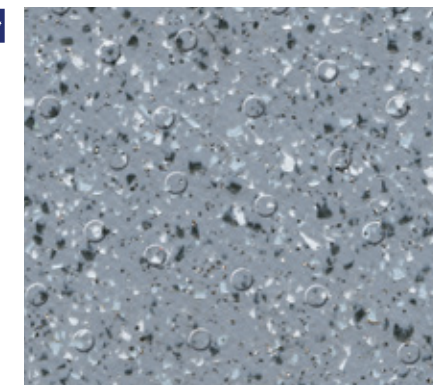

7746 Stone
 NCS: 5502-B / LRV: 23.6

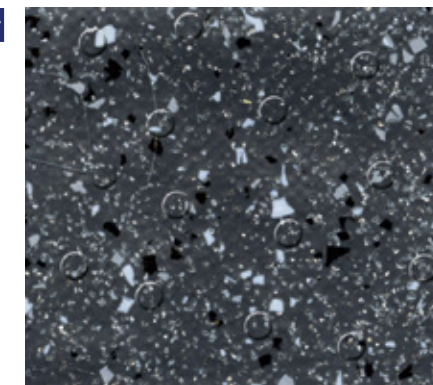


7732 Gravel
 NCS: 7502-B / LRV: 9.7




Tarasafe Ultra




R10 Slip Resistant
P4 Slip Resistant
SparClean® Treated




Easier to install, lighter & more flexible to handle
 Easier to cut – up to 5 x more blade life
 Contains 29% recycled content
 100% recyclable

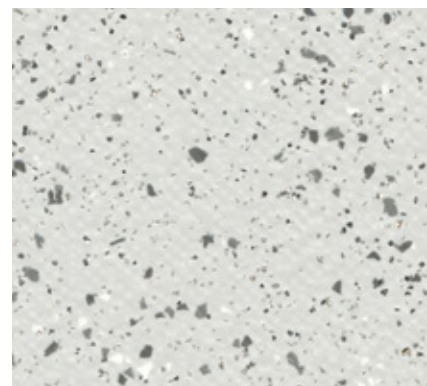


8701 Opal
 NCS: 1500-N / LRV: 59.1

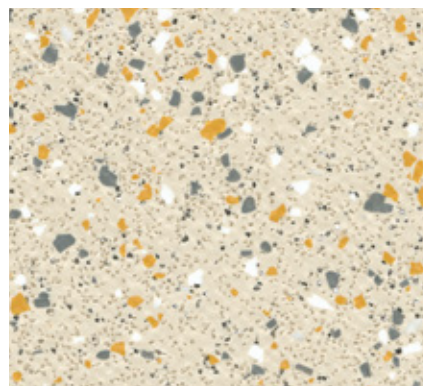


7383 Diopside
 NCS: 1005-Y20R / LRV: 59.6

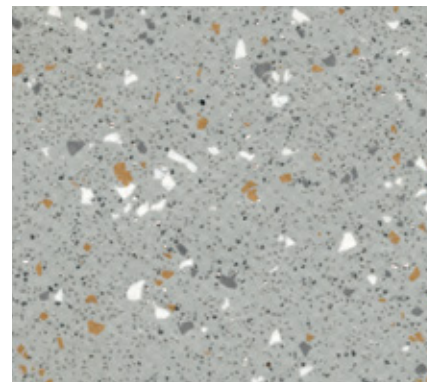


8704 Pebble
 NCS: 3000-N / LRV: 44.1

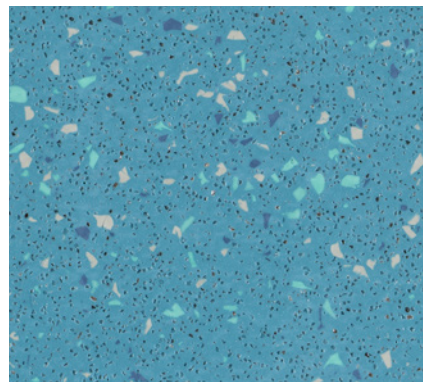


2432 Larimar
 NCS: 3030-B10G / LRV: 26.3

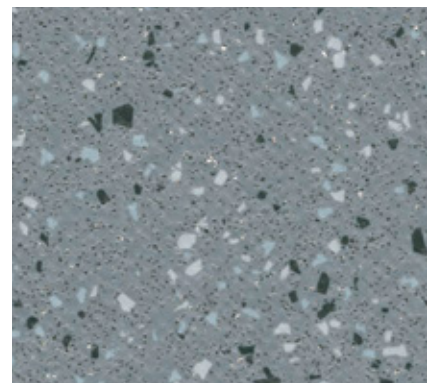


8709 Granite
 NCS: 5502-B / LRV: 25.4

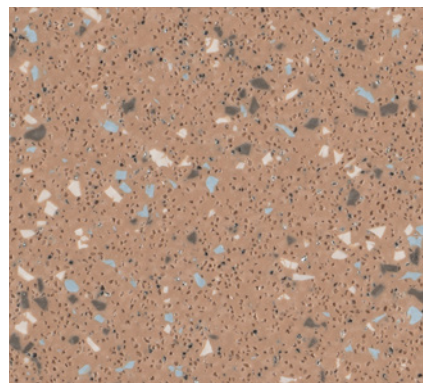


3183 Bauxite
 NCS: 4010-Y50R / LRV: 28.3

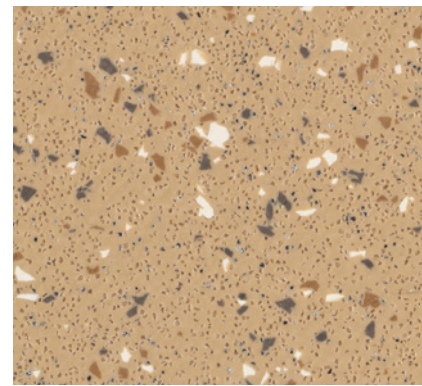


6088 Andalusite
 NCS: 3020-Y40R / LRV: 35.9

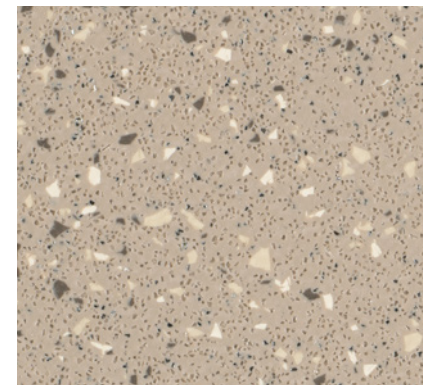


6348 Clay
 NCS: 3005-Y20R / LRV: 38.7

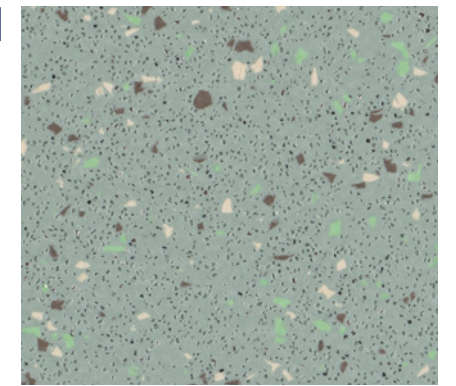


6591 Serpentine
 NCS: 3010-G / LRV: 32.4

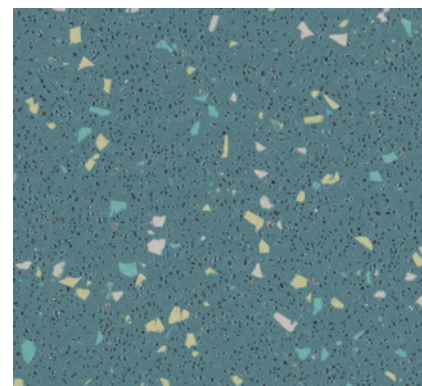


6593 Epidote
 NCS: 5020-B30G / LRV: 19.1

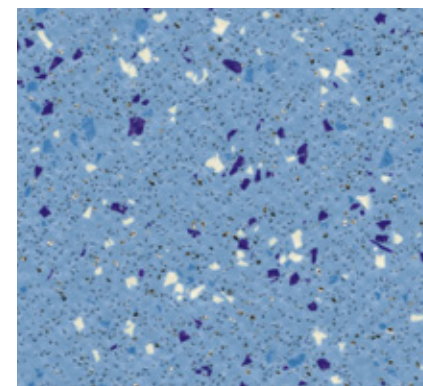


7482 Halite
 NCS: 3030-R90B / LRV: 31.8

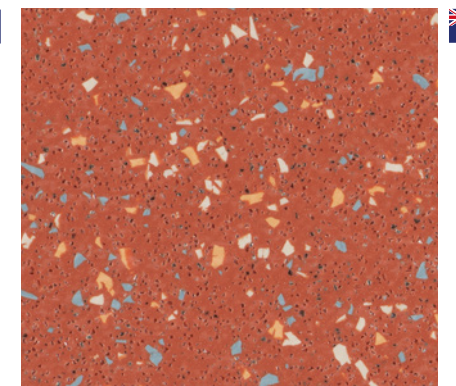


7307 Copper
 NCS: 4040-Y80R / LRV: 18.5

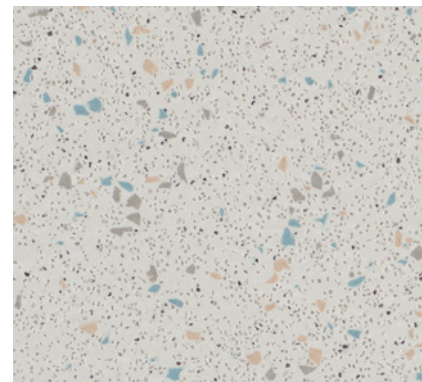


7724 Calcium
 NCS: 2002-Y / LRV: 53.3

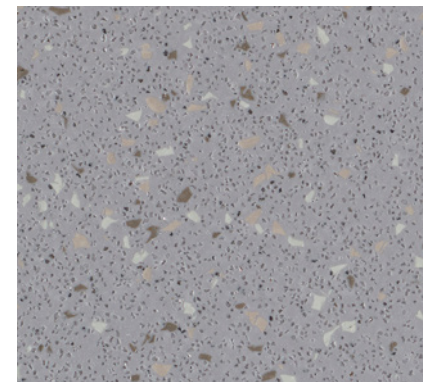


7792 Galena
 NCS: 4502-B / LRV: 28.8

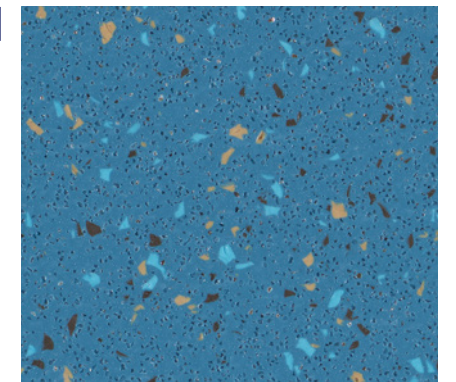


8420 Azurite
 NCS: 4030-B / LRV: 17.1

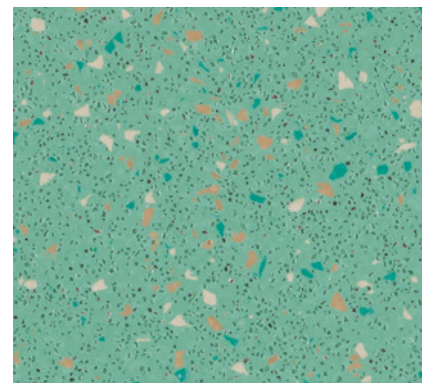

8592 Aventurine
 NCS: 3030-G / LRV: 32.6

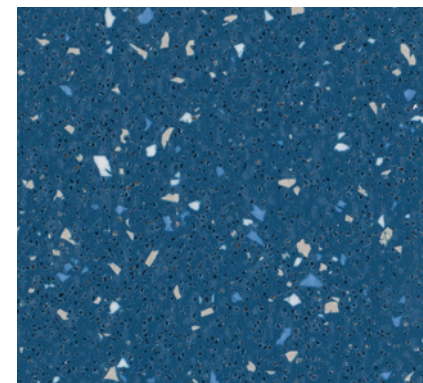

9127 Meteorite
 NCS: 5030-R90B / LRV: 11.7

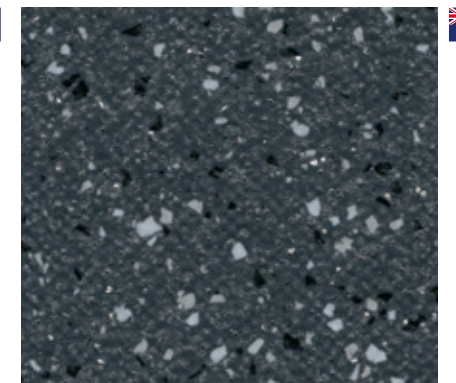

8717 Obsidian
 NCS: 7502-B / LRV: 10.1

Tarasafe Standard



Compact sheet

Heavy traffic



R10

Slip Resistant

P4

Slip Resistant

SparClean®

Treated



Crystal inlay technology


Brighter, cleaner surface that adds real sparkle



Easier to install, lighter & more flexible to handle



Easier to cut – up to 5 x more blade life



Matte finish

Matte surface finish for an improved design experience



Wear group


High resistance to heavy traffic




29% recycled content
100% recyclable



Order your Tarasafe samples here

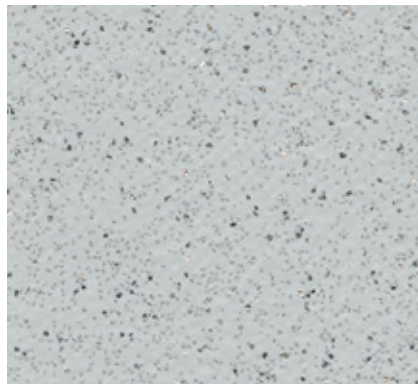

7731 Marbre
NCS: 2002-B / LRV: 51.2

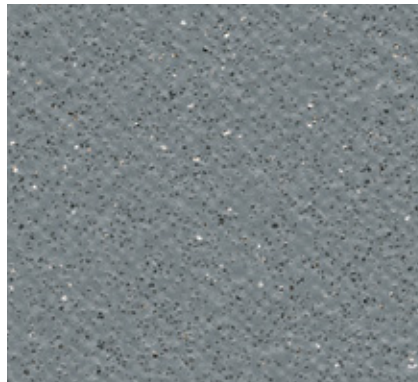

7773 Storm
NCS: 5502-B / LRV: 21.3




7801 Noir
NCS: 9000-N / LRV: 5.7




7767 Dove Grey
NCS: 3502-G / LRV: 34.1




7618 Edelweiss
NCS: 1505-Y10R / LRV: 57.9

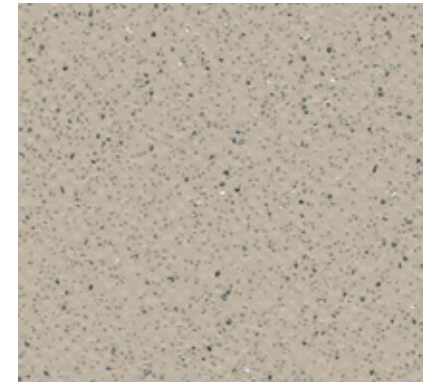


7386 Savana
NCS: 2005-Y50R / LRV: 44.3

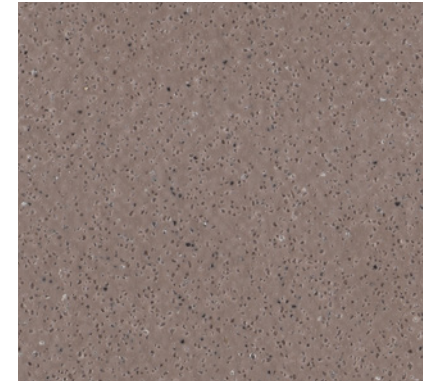


6085 Grizzly
NCS: 6005-Y80R / LRV: 19.2

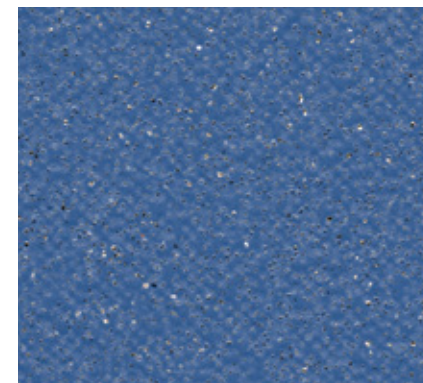

7709 Royal Blue
NCS: 4040-R80B / LRV: 15.3

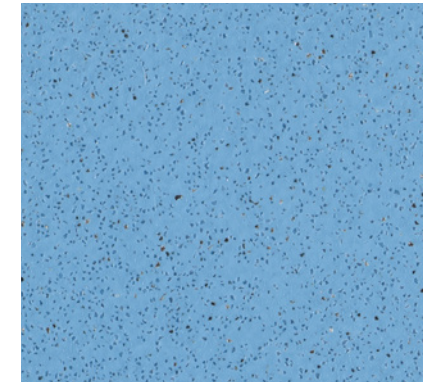


2430 Rain Drop
NCS: 2040-R90B / LRV: 32.5

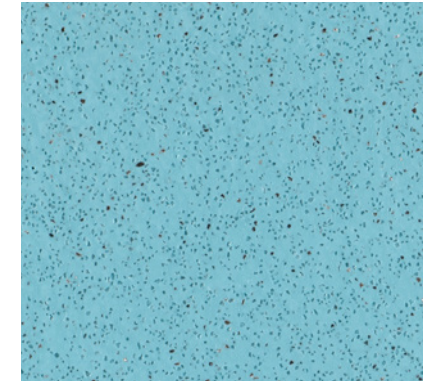


6245 Atoll
NCS: 2030-B10G / LRV: 41.1




7315 Jute
NCS: 3020-Y40R / LRV: 30.8

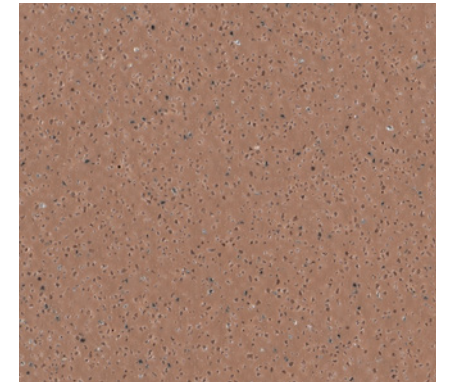

6084 Badian
NCS: 4020-Y70R / LRV: 20.9

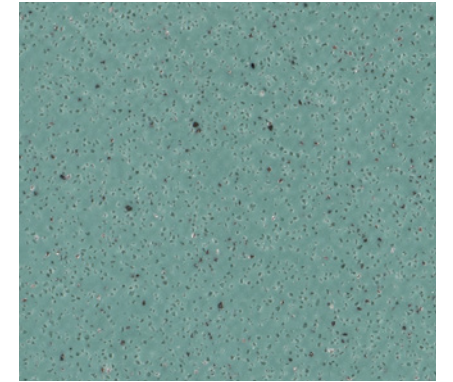

6589 Leaf
NCS: 4020-B90G / LRV: 25

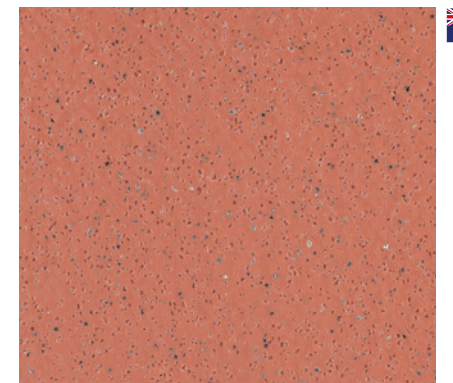

8102 Paprika
NCS: 3040-Y80R / LRV: 21.9

Tarasafe H2O



0024 Peyto
NCS: 3000-N / LRV: 43.7



0025 Nile
NCS: 3010-Y50R / LRV: 43.4



0031 Eacham
NCS: 4005-Y50R / LRV: 34.3



0032 Malawi
NCS: 3005-Y50R / LRV: 40.1




0034 Zambezi
NCS: 5502-B / LRV: 19.9






0035 Bacalar
NCS: 4010-G30Y / LRV: 32.5



0033 Rhine
NCS: 4000-N / LRV: 29.7


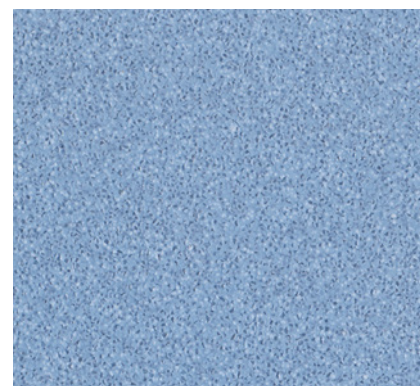


0036 Lagoa
NCS: 3020-R90B / LRV: 31.1

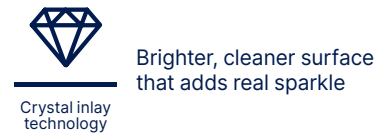


The Dementia Services Development Centre at the University of Stirling has approved Tarasafe H2O for use within a dementia-inclusive environment


Tarasafe Super

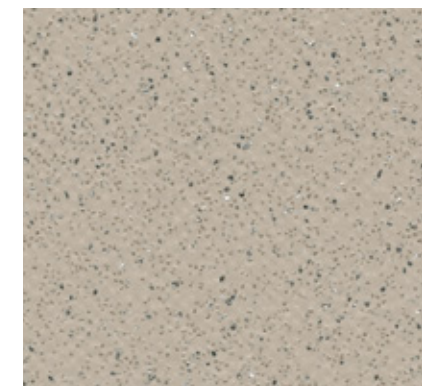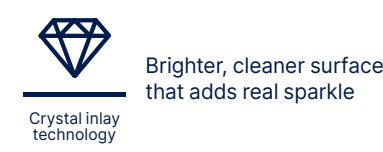



7386 Savana
NCS: 2005-Y20R / LRV: 44.0

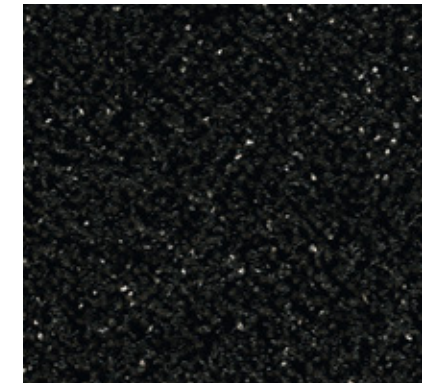

7801 Noir
NCS: 9000-N / LRV: 5.7

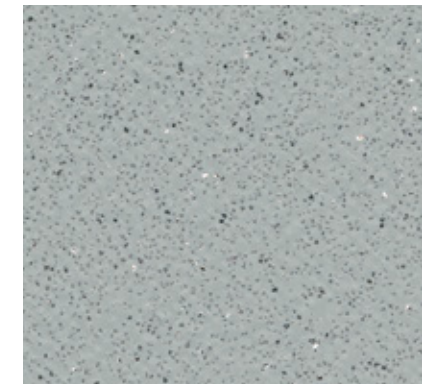

7767 Dove Grey
NCS: 3502-G / LRV: 34.1

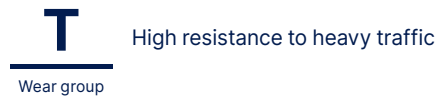

Tarasafe

STANDARD - H₂O - ULTRA
ULTRA H₂O - SUPER

gerflor.com.au / follow us   



Z0201127

			Tarasafe Ultra	Tarasafe Ultra H ₂ O	Tarasafe Standard	Tarasafe H ₂ O	Tarasafe Super
Description							
Total thickness	EN ISO 24346	mm	2.0	2.0	2.0	2.0	2.20
Thickness of wearlayer	EN ISO 24340	mm	0.85	1.0	0.85	0.85	1.12
Weight	EN ISO 23997	g/m ²	2360	2400	2360	2350	2880
Width/length of sheet	EN ISO 24341	cm/lm	200/20	200/20	200/20	200/20	200/20
Classification							
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43
Fire rating	AS ISO 9239-1	kW/m ²	8.3	8.5	8.4	8.9	8.7
		smoke%/min	134	112	199	132	167
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Slip resistance wet pendulum	AS 4586 2013 (Appendix A)	class	P4	P3	P4	P5	P5
Slip resistance oil-wet ramp	AS 4586 2013 (Appendix D)	class	R10	R11	R10	R11	R12
Slip resistance wet/barefoot ramp	AS 4586 2013 (Appendix C)	class	-	C	-	B	-
Surface roughness	-	µm	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20
Performance							
Abrasion resistance	EN 660.2	mm ³	≤ 2	≤ 4	≤ 2	≤ 2	≤ 2
Abrasion group	-	group	T	P	T	T	T
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1	mm	≤ 0.03	≤ 0.10	≈ 0.05	≤ 0.10	≤ 0.10
Castor chair test (type W)	ISO 4918	-	Good	Good	Good	Good	Good
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	SparClean®	-	SparClean®	SparClean®	-
Chemical products fastness	EN ISO 26987	-	Good	Good	Good	Good	Good
Environment / Indoor Air Quality							
TVOC	-	mg/m ² /hr (24 hours)	0.188	0.266	0.215	< 100	0.266
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®

(1) The implementation of an effective cleaning method is the best defence against infection.

INSTALLATION should be carried out in accordance with local standards. The subfloor should be smooth, hard, clean, dry and free from contamination prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation, in a room temperature of between 18-24°C where the product will be installed.

MAINTENANCE should be carried out regularly to retain the appearance and durability of the floor. The floorcoverings should be maintained with regular sweeping and damp mopping. A more intense cleaning regime should be carried out periodically with a machine using a red pad and a neutral cleaner. No seals, polishes or waxes should be applied to the floorcovering, as this will impair the slip resistance of the floor.

To download the full Tarasafe range installation instructions, maintenance guides and certifications visit www.gerflor.com.au

Manufactured using recycled card.

A sampling service is available for your convenience -1800 060 785

GERFLOR AUSTRALASIA PTY LTD

Tel: +613 9832 1333

Email: custorders@gerflor.com.au

ADHESIVES: Please refer to Gerflor Installation guidelines on gerflor.com.au

IMPORTANT Gerflor has a policy of continuous product and product data improvement. It reserves the right to change design and specifications without notice. The information contained in this document is valid from 01/03/2024 and is subject to change at any time without notice. In the context of constantly changing technology our customers are responsible, prior to any use, for checking with us that this document is the version in force.

To download the full Tarasafe range installation instructions, maintenance guides and certifications visit www.gerflor.com.au



We care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*

-20 % kg CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT**

10 % by 2025



RECYCLED CONTENT

30 % by 2025



ADHESIVE FREE***

35 % by 2025



ANNUAL VOLUME RECYCLED

60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution