



# Streamo Seacrosser

Marine flooring for ship interiors

**Gerflor**<sup>®</sup>



# Streamo Seacrosser



**Evercare™** | **100% Recyclable**

High performing homogeneous multipurpose flooring

**18**  
COLORS  
**Directional marbledized design**

  
**For medium to heavy duty traffic**

  
**Rolls 2 × 20 lm**

  
**Tiles 608 × 608 mm**

  
**TVOC < 10 µg/m³ after 28 days**

**100% RECYCLABLE**




1060 Anthracite



1040 Dark Grey


**An exclusive and gerflor® patented surface treatment**

**Evercare™ By Gerflor®**

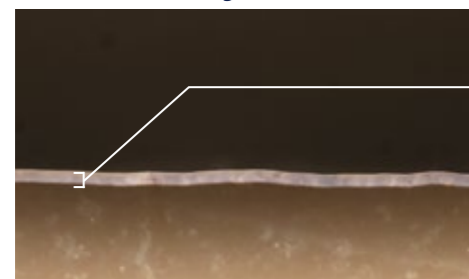


Gerflor®: Even thickness



100% non-porous surface  
Simple and easy stain removal

**Other treated floor covering**

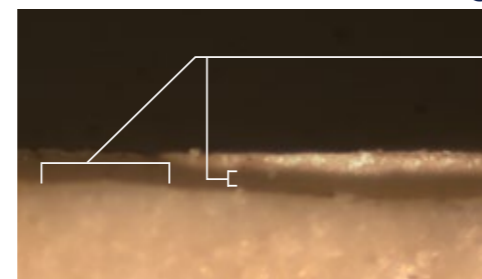

Missing treatment and uneven thickness



Non-treated product



1059 Blue Grey



1033 Brown





1010 Grey




1009 Light Grey

  
**Stain Shield**

  
**Matt effect:**  
 enhanced design & color,  
 long lasting appearance

  
**No wax for life**  
**Water and detergent saving**

  
**Anti-bacterial & anti-viral activity**  
 ISO 22196 & ISO 21702

Don't forget our complementary ranges!

  
 Handrails

  
 Wall Coverings & Protections

  
 Skirtings & Profiles

  
 IMO adhesive







# Streamo Seacrosser



Evercare™ | 100% Recyclable

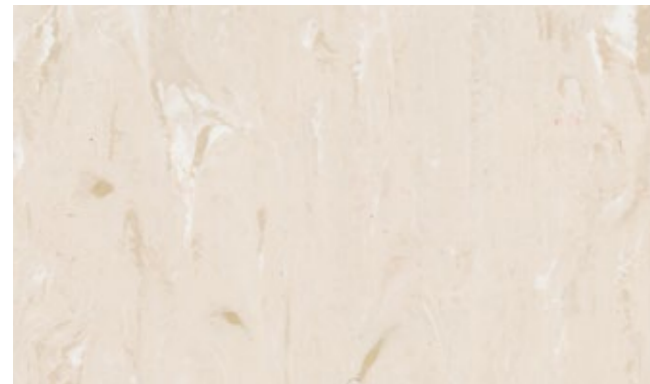

1002 Beige

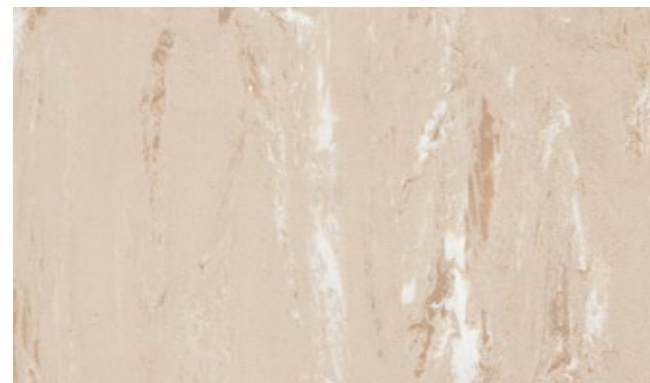

1004 Earth



1032 Yellow




1055 Apricot




1003 Light Ocre




1035 Ocre

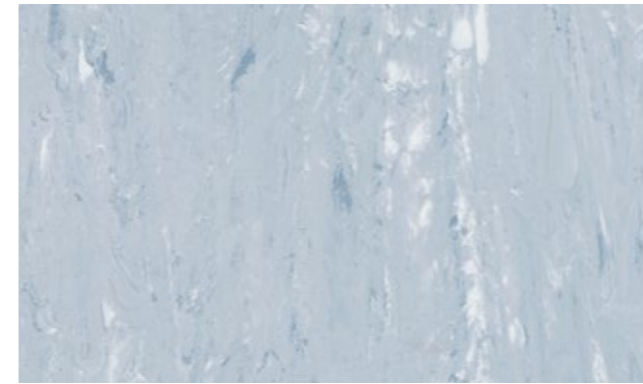


1006 Blue

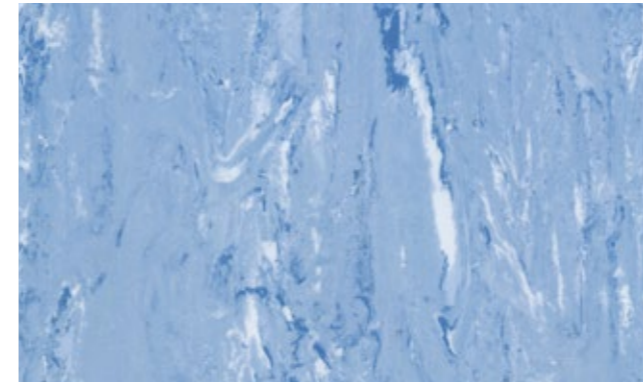


1036 Medium Blue

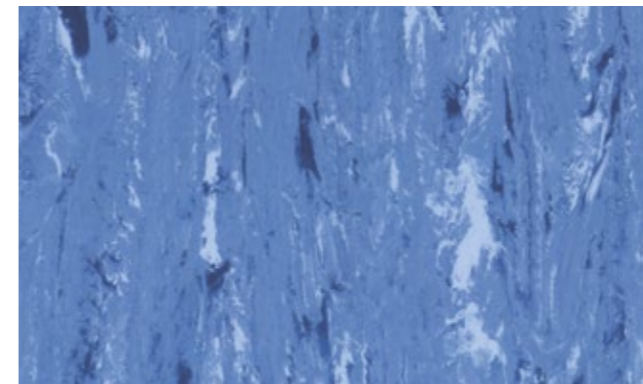


1056 Dark Blue

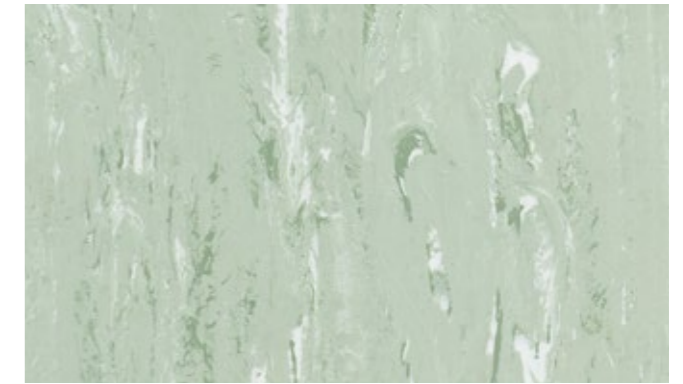

1007 Green

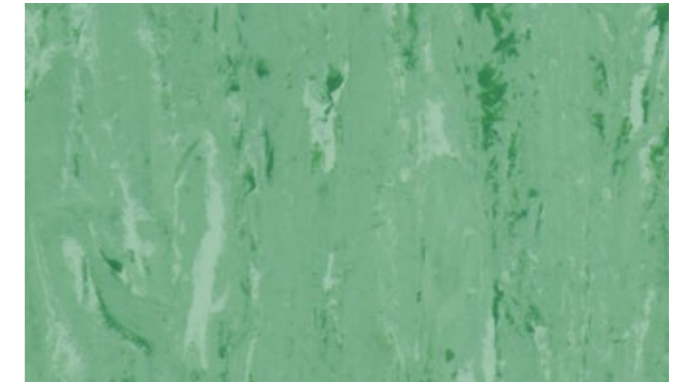

1037 Medium Green

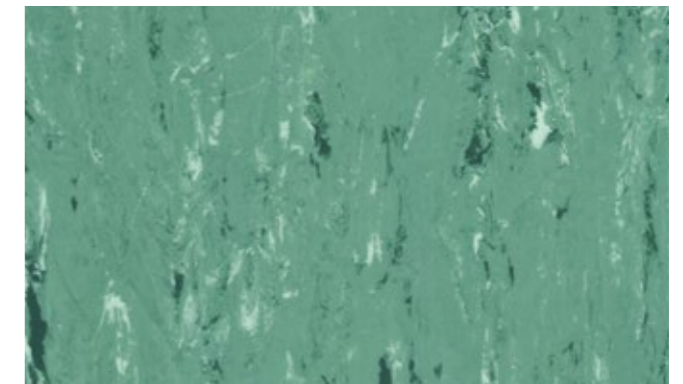

1057 Dark Green








X3240017

# Streamo Seacrosser

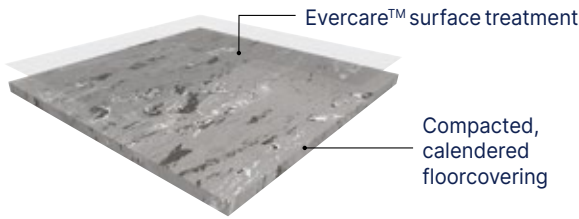

## INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

**⚠** Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

## Description / Description / Beschreibung / Descripción / Descrição / Descrizione

Total thickness / <i>Epaisseur totale</i> / Gesamtdicke / <i>Espesor total</i> / <i>Essatura total</i> / <i>Spessore totale</i>	EN ISO 24346	mm	2.0
Weight / <i>Poids</i> / Gewicht / <i>Peso</i> / <i>Peso</i> / <i>Peso</i>	EN ISO 23997	g/m <sup>2</sup>	3200
Width/length of sheet / <i>Largeur/longueur des lés</i> / Rollenbreite/Rollenlänge / <i>Ancho/largo de rollos</i> / <i>Largura/comprimento dos rolos</i> / <i>Larghezza/lunghezza dei telii</i>	EN ISO 24341	cm/lm	200/20
Tile size / <i>Format dalles</i> / Format Fliesen / <i>Dimensiones de las losetas</i> / <i>Dimensões dos mosaicos</i> / <i>Dimensione delle piastre</i>	EN ISO 24342	mm	608 × 608
Sqm/Box / <i>m<sup>2</sup>/boîte</i> / Qm pro Karton / <i>m<sup>2</sup>Bulto</i> / <i>m<sup>2</sup>Caixa</i> / <i>m<sup>2</sup>confezione</i>	-	-	7.39
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Fliesenanzahl pro Karton / <i>Cantidad de losetas/caja</i> / <i>Quantidade dos mosaicos/caixa</i> / <i>N° piastre per confezione</i>	-	-	20

## Classification / Classification / Klassifizierung / Clasificaciones / Classificações / Classificazioni

Norm/product specification / <i>Norme produit</i> / Produkt Norm / <i>Normas</i> / <i>Normas</i> / <i>Norma prodotto</i>	-	-	EN ISO 10581
Fire rating / <i>Classement feu</i> / Brandverhalten / <i>Fuego</i> / <i>Fogo</i> / <i>Reazione al fuoco</i>	IMO Resolution	-	MSC 307 (88) Part 5 MSC 307 (88) Part 2
	Maritime Approvals	-	Marine Equipment Directive US Coast Guard Transport Canada SOLAS 74
Static electrical propensity / <i>Potentiel de charge</i> / Begehaufladung / <i>Comportamiento electrostático</i> / <i>Comportamento electrostatico</i> / <i>Potenziale di carica</i>	EN 1815	kV	< 2

## Performance / Performances / Technische Eigenschaften / Cualidades Técnicas / Performances / Caratteristiche Tecniche

Wet Slip resistance / <i>Anti-glissance à l'humide</i> / Rutschverhalten bei Nässe / <i>Resistencia de deslizamiento en mojado</i> / <i>Antideslizamento condições no molhado</i> / <i>Indice di antiscivolosità con superficie bagnata</i>	EN 16165 App B (DIN 51130)	class	R9
Type Binder content / <i>Teneur en agent liant</i> / Bindenmittelgehalt	ISO 10581	type	II
Dimensional stability / <i>Stabilité dimensionnelle</i> / Maßstabilität / <i>Estabilidad dimensional</i> / <i>Estabilidade dimensional</i> / <i>Stabilità dimensionale</i>	EN ISO 23999	%	Sheet ≤ 0.40 / Tile ≤ 0.25
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / <i>Punçoamento</i> / <i>Impronta</i> (average measured value)	EN ISO 24343-1	mm	~ 0.03
Thermal conductivity / <i>Conductivité thermique</i> / Wärmeleitfähigkeit / <i>Resistencia térmica</i> / <i>Resistência térmica</i> / <i>Resistenza termica</i>	EN ISO 10456	W/(m.K)	0.25
Colour fastness / <i>Solidité lumière</i> / Lichtechtheit / <i>Resistencia a la luz</i> / <i>Estabilidade das cores</i> / <i>Solidità alla luce</i>	EN 20 105 - B02	degree	≥ 6
Chemical resistance / <i>Résistance aux produits chimiques</i> / Verhalten gegenüber Chemikalien / <i>Resistencia a los productos químicos</i> / <i>Resistência aos produtos químicos</i> / <i>Resistenza ai prodotti chimici</i>	EN ISO 26987	-	OK
Surface treatment / <i>Traitement de surface</i> / Oberflächenvergütung / <i>Tratamiento de superficie</i> / <i>Trattamento di superficie</i>	-	-	EVERCARE™
Anti-bacterial activity (E.coli – S. aureus – MRSA) after 24h <sup>(1)</sup> / <i>Activité anti-bactérienne</i> / <i>Antibakterielle Aktivität</i> / <i>Actividad antibacterial</i> / <i>Atividade antibacteriana</i> / <i>Azione batterio-statica</i>	ISO 22196	Class	> 99 % inhibits growth
Antiviral activity (Human Coronavirus) / <i>Activité anti-viral (Coronavirus humain)</i> / <i>Antivirale Aktivität (Humanes Coronavirus 229E)</i> / <i>Actividad antiviral (Coronavirus humano)</i> / <i>Atividade antiviral (Coronavirus humano)</i> / <i>Attività antivirale (coronavirus umano)</i>	ISO 21702	-	After 2 h > 99,7% virucidal activity After 5 h > 99,9% virucidal activity

## Environment / Indoor Air Quality

TVOC after 28 days / <i>TVOC après 28 jours</i> / TVOC (28 Tage) / <i>TVOC (28 dias)</i> / <i>TVOC (28 dias)</i> / <i>TVOC (28 giorni)</i>	ISO 16000-6	µg/m <sup>3</sup>	< 10
Certification / <i>Zertifikat</i> / <i>Certificado</i> / <i>Certificazione</i>	-	-	Floorscore®

(1) The implementation of an effective cleaning regime is the most important against infection.

## IMPORTANT:

The information contained in this document is valid from 01/01/2025 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.



## we care / we act

Our Commitments for a Sustainable future



**CARBON FOOTPRINT\***

-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025



**RECYCLED CONTENT**

25 % by 2025



**LOW VOC PRODUCT**  
Indoor air quality



**PRE-CUT SERVICES**  
saving waste & installation time

Streamo Sustainable Solutions

# Gerflor®

\* Scopes 1 and 2 defined in the GHG protocol