





TREND

STREETWISE STYLE

Streetwise Style is a textured loop pile carpet tile range featuring two designs; Trend and Flair. The range offers a choice of complementary colours that can be used alone or can be combined on the floor to create stylish and contemporary floor schemes. Streetwise Style is suitable for a wide range of environments including commercial office and education.

CREATE YOUR DESIGN SPACE

ZONING

Define spaces such as walkways and desk areas by combining different tones to create a gradual transition across the floor from one zone to another.

FEATURE AREAS

Combine contrasting tones to create a feature with a strong design statement in specific areas such as social spaces and breakout areas.

MODULAR DESIGN

Consider the versatility of tile and choose from a range of different installation methods. Mix complementary tones together on the floor to create a unique design.

CONTENTS

Colourways	1
Architects Studio Scheme Floor Plan	
Social Hub Scheme Floor Plan	
Commercial Office Scheme Floor Plan	





LRV 8.37



Trend | Cypher 00575 LRV 6.63


Trend | Canon 00578 LRV 3.37








Flair | Rhythm 06778




Flair | Cypher 06779 LRV 6.73


Flair | Canon 06770 LRV 3.52



1


ARCHITECTS STUDIO SCHEME

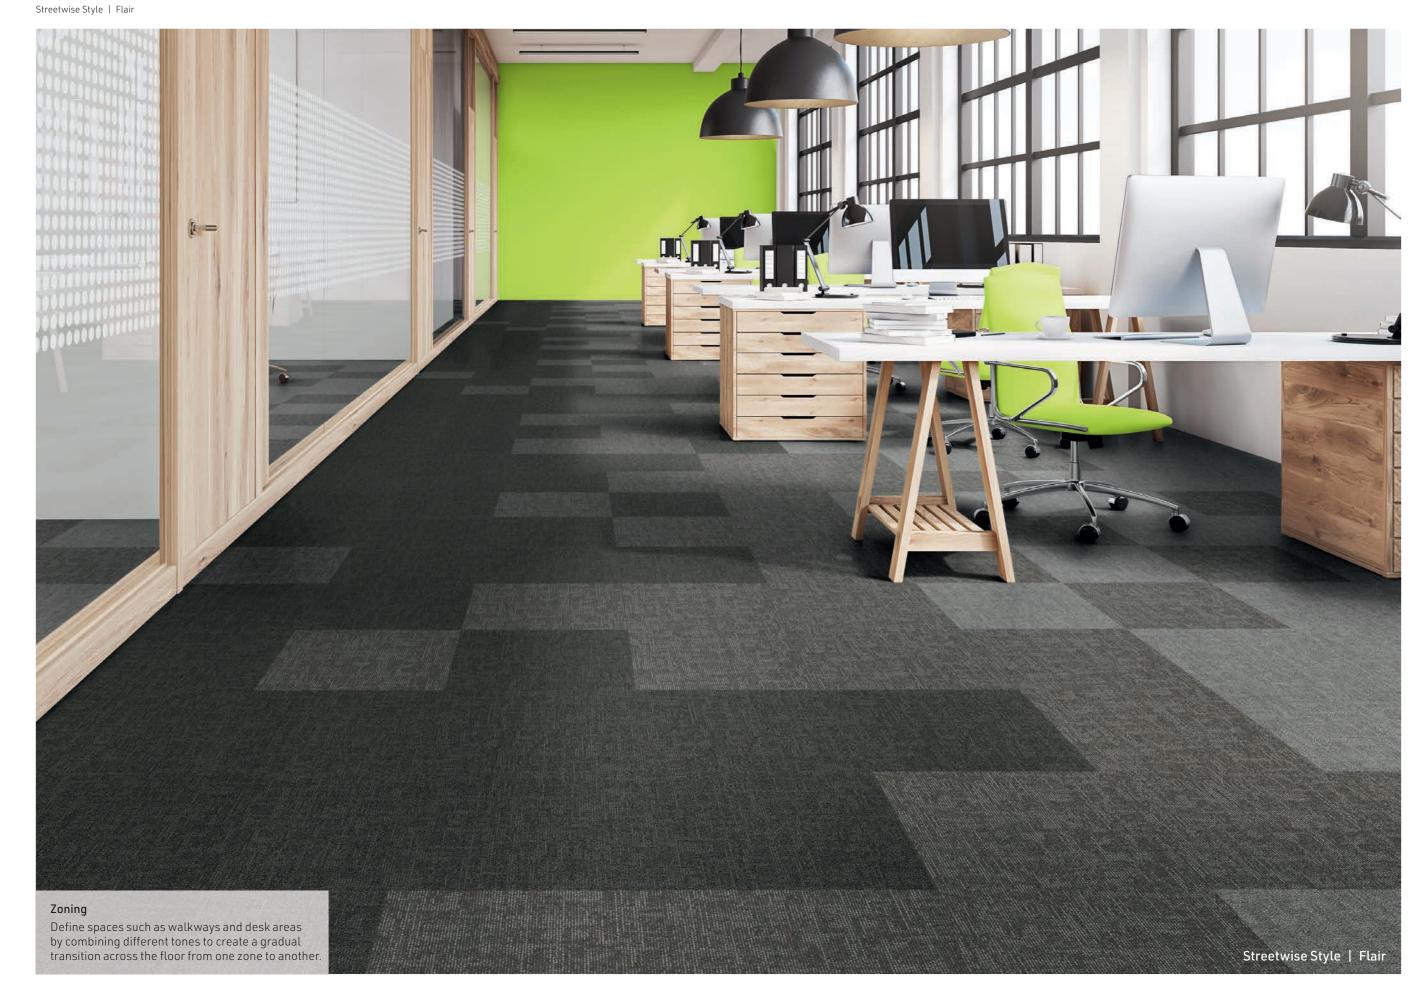


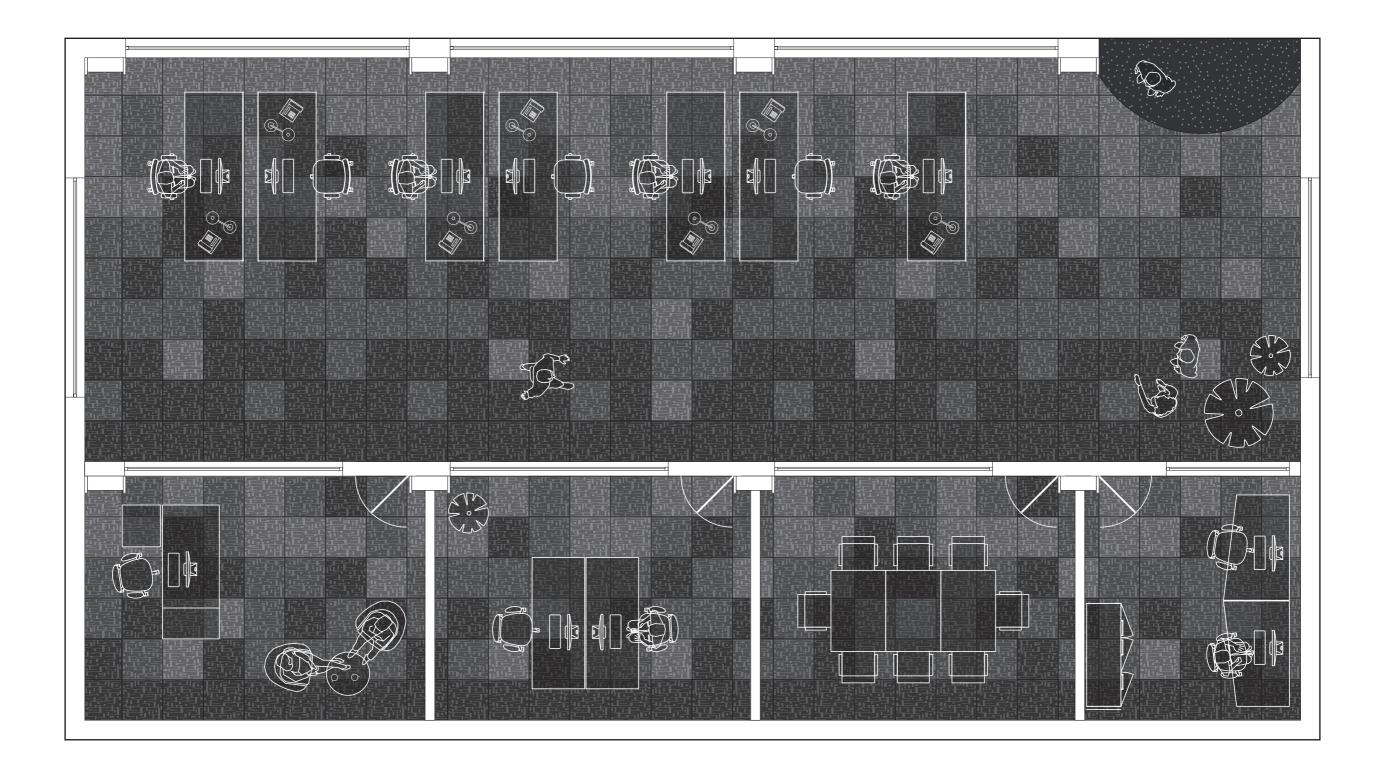






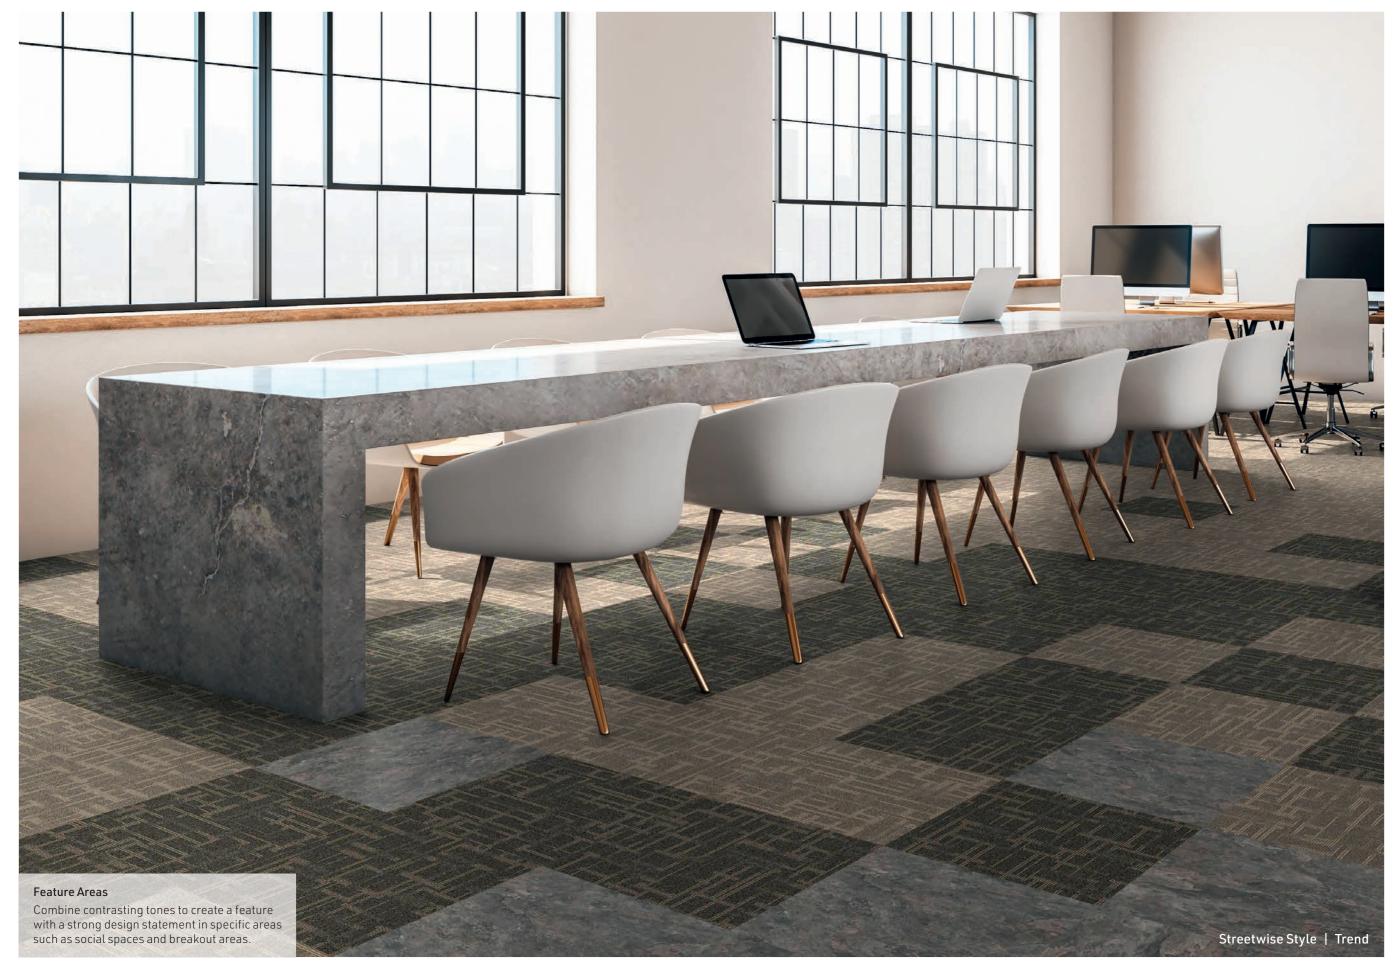

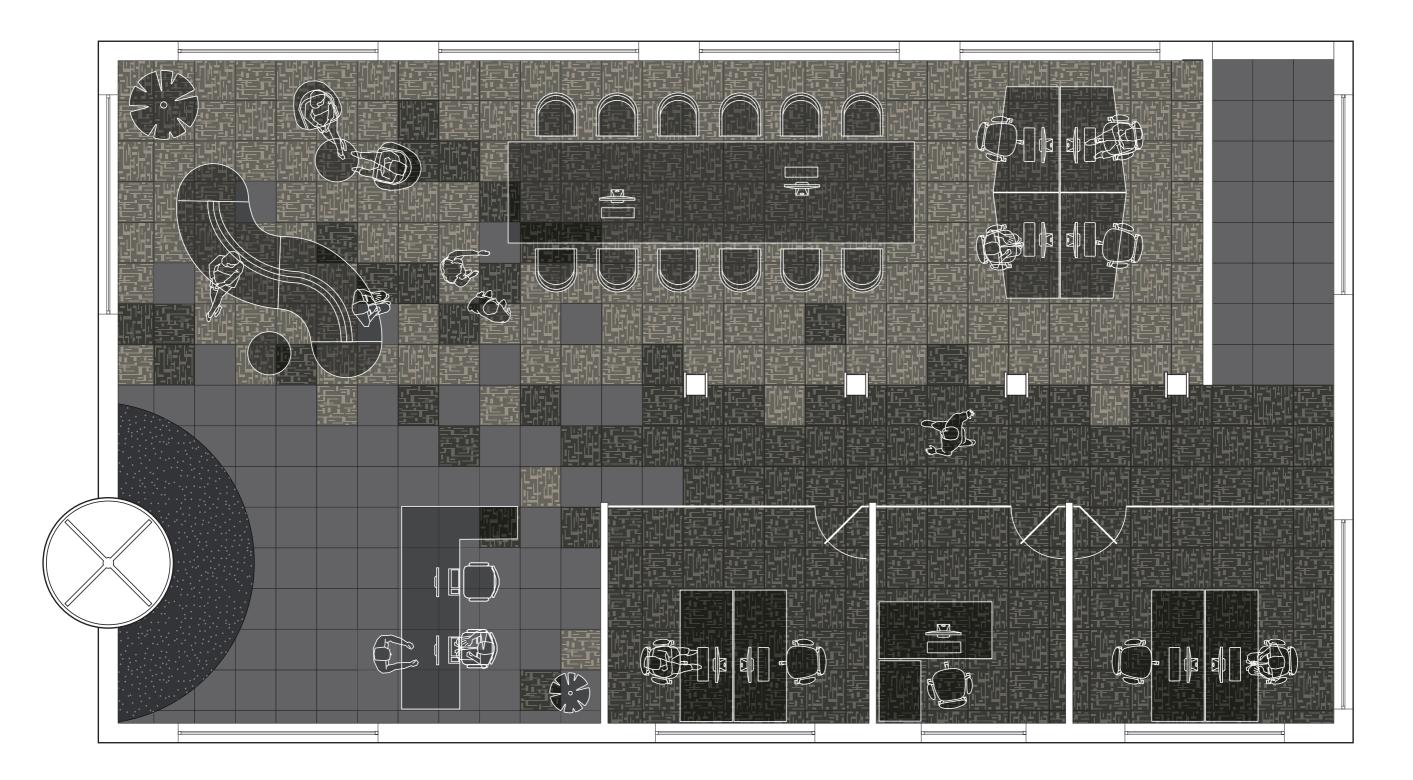





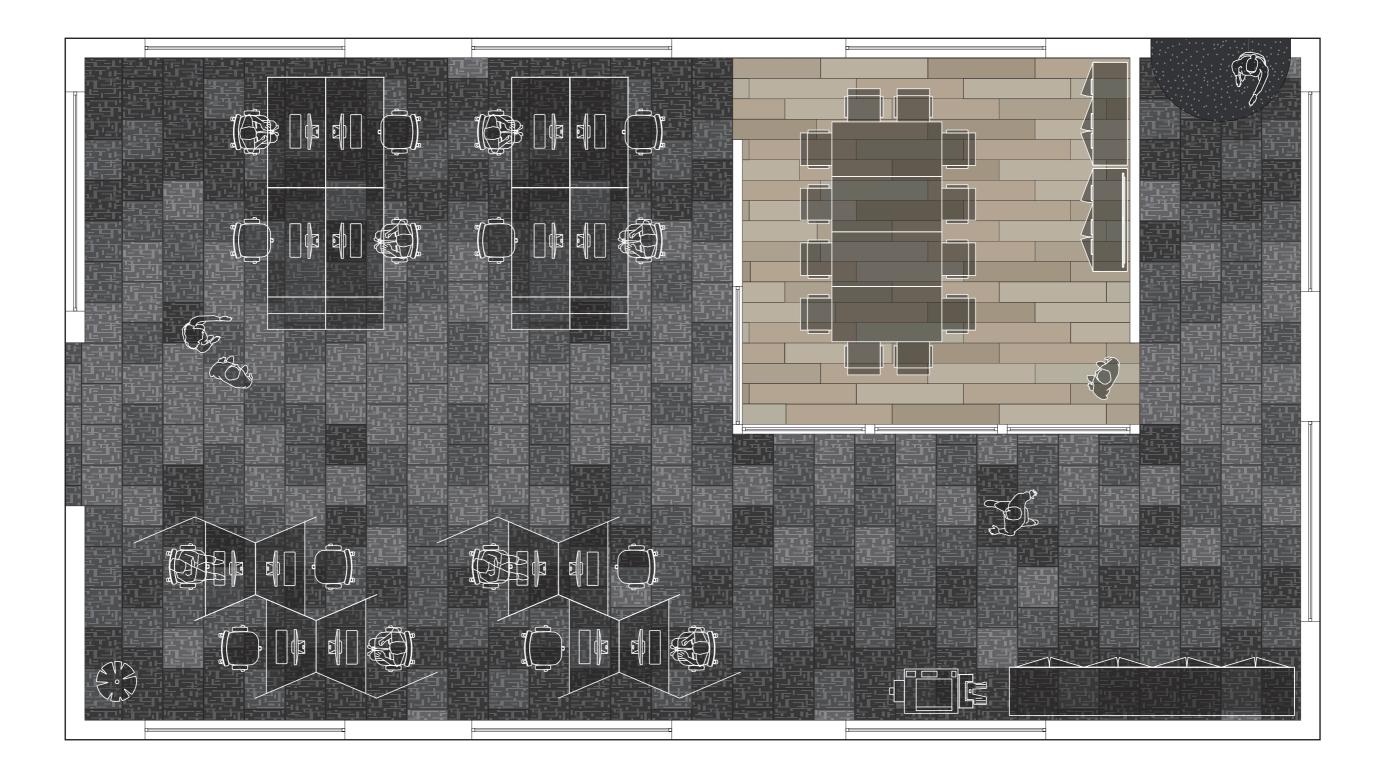



Streetwise Style Trend | Focus 00573 (Installed brick bond) Streetwise Style Trend | Cypher 00575 (Installed brick bond)



Secondary Barrier Matting Boulevard 6000

STREETWISE STYLE

gerflor.co.uk gerflor.ie gradus.com

Uniclass Pr_35_57_11_62 CI/SfB (43) Tn6

	STREETWISE STYLE	
	TREND	FLAIR
SPECIFICATION		
Product Format	Tile	Tile
Product Dimensions	500mm x 500mm	500mm x 500mm
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4614 g/m²	4334 g/m ²
Tufted Pile Weight	500 g/m ²	520 g/m²
Gauge	1/10" (39.4 per dm)	1/10" (39.4 per dm)
Stitches	52.2 per dm	45.2 per dm
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)	
Total Carpet Thickness	6.3mm	6.1mm
PERFORMANCE SPECIFICATION		
Classification BS EN 1307	Class 33	Class 33
Castor Chair BS EN 985 Test A	Pass	Pass
Static Electricity ISO 6356	<2kV	<2kV
Impact Sound Insulation EN ISO 10140-3	22dB	21dB
FLAMMABILITY		
BS EN 13501-1	Class Bfl-s1	Class Bfl-s1
WARRANTIES		
Wear Warranty	12 Year	12 Year
Anti-static Warranty	10 Year	10 Year
ADHESIVES		

For recommended adhesives contact Technical Services.



The information contained in this document is valid from 1/4/2024 and is subject to change at any time without notice.

Contact us to order free samples

UNITED KINGDOM:

Gerflor Flooring UK Ltd Park Green, Macclesfield, Cheshire, SK11 7LZ Tel: 01625 428922 E-mail: contractuk@gerflor.com Visit: www.gerflor.co.uk

IRELAND:

Gerflor Ltd Ballybay Road, Co. Monaghan, A81 YD83, Republic of Ireland Tel: +353 (0) 42 966 1431 E-mail: gerflorirl@gerflor.com Visit: www.gerflor.ie

