


BLEACHERBLOK® SV

BleacherBlok® SV provides a seamless look across the entire gym while adding durability under the bleachers. Installed beneath our Surface sports flooring, BleacherBlok® SV enhances indent resistance exactly where it's needed, improving the performance of our sports flooring systems. It's the perfect solution for both permanent and mobile bleacher setups.

Together, Surface products and BleacherBlok® offer superior support beyond bleachers, making them ideal for rolling sports like roller skating, rollerblading, and wheelchair sports.

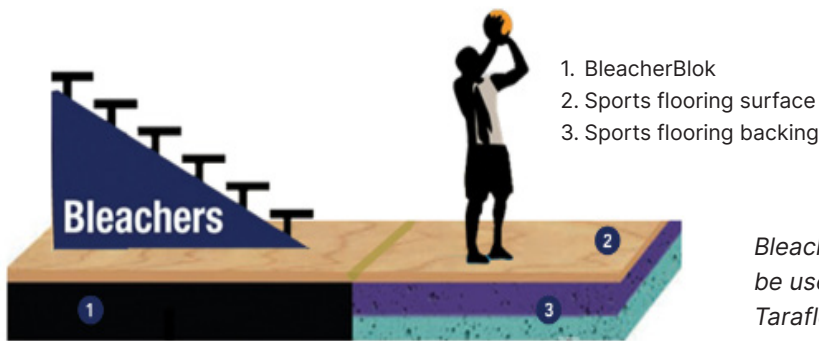

BleacherBlok® SV and Surface products are designed to be used alongside Recreation 60, Taraflex Sport M Plus, and Taraflex Multi-Use 6.2 for optimal performance

PRODUCT DESCRIPTION	STANDARD	REQUIREMENTS	RESULTS
BleacherBlok® SV (Solid Vinyl)	-	-	Surface over Vinyl
Sizes	-	-	5 ft x 5 ft tile
Thickness	-	-	4 mm and 5.25 mm
Length	-	-	5 ft
Width	-	-	5 ft
Weight	-	-	15.85 oz per sq ft / 20.8 oz per sq ft
PERFORMANCE			
Static Load Resistance	ASTM F970 (Modified)	750 psi	Meets Requirements
Resistance to Rolling Loads	ASTM F2753	1500 Cycles @ 400 lbs	Pass
Fire Rating - Flame Spread	ASTM E648	Class 1	Meets Requirements
Fire Rating - Flaming	ASTM E662	-	Meets Requirements
Fire Rating - Non-Flaming	ASTM E662	-	Meets Requirements