




Creation 30 Rigid

The Reference in LVT

Gerflor[®]

Creation 30 Rigid

Formats (mm)  178x1219  457x914



PROTECSHIELD™

ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMBOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RIGID CORE TECHNOLOGY



Renovation over ceramic tiles 8mm/3mm



Resistance against high temperature variation

INTERLOCKING SYSTEM



Standard laminate installation



100% REACH PHTHALATE FREE
(except recycled content)



100% RECYCLABLE UP TO 35% RECYCLED CONTENT



TVOC EMISSIONS BELOW DETECTION LEVEL
(TVOC < 100µg/m³ after 28 days)
NO FORMALDEHYDE



Can be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15dB

Gerflor Acoustic Plus 19dB



Code: 1798 - Format: 1m x 15lm



Code: 0704 - Format: 0.98m x 15.3lm

Gerflor installation guidelines on gerflor.ae

The only Saudi made Rigid LVT




LVT is produced in
Saudi Arabia, Dammam
2nd Industrial city



The region's first LVT
manufacturer



Exclusive
designs



Lock system



Complete solution
Underlayers, matting,
matching skirtings and
coverstrips



Bostonian Oak Honey

Creation 30 Rigid




BUFFALO 0457

178 x 1219



MICHIGAN 0461

178 x 1219

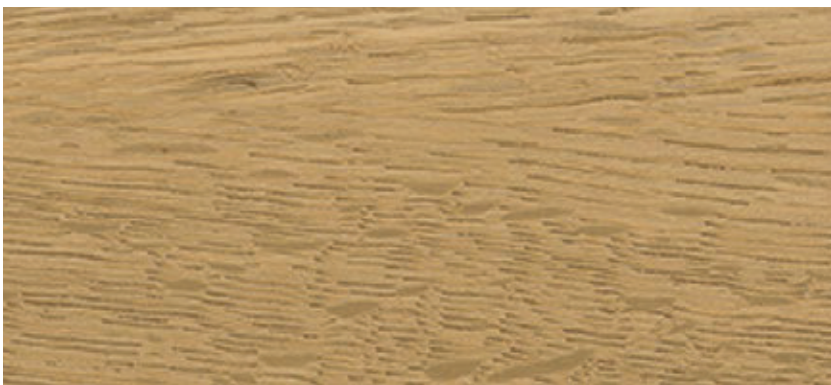

QUARTET FAUVE 0859

178 x 1219



BOSTONIAN OAK HONEY 0851

178 x 1219



DESIGN SHADE VARIATION



Light



Medium



High





Amarante



Bostonian Oak



AMARANTE 0579

178 x 1219



LONG BOARD 0455

178 x 1219




BOSTONIAN OAK 0871

178 x 1219



Creation 30 Rigid

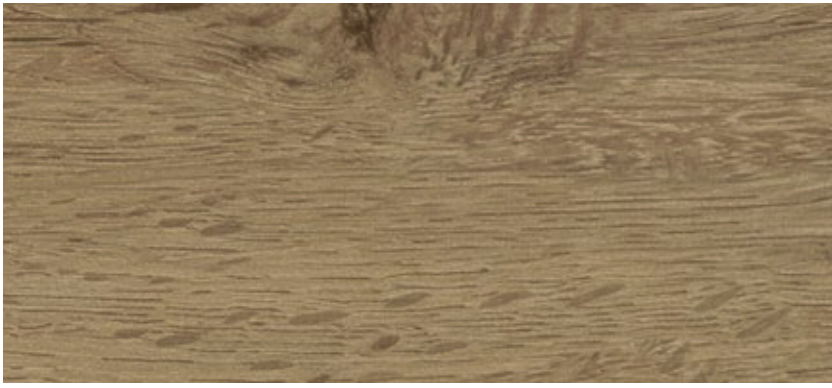

QUARTET 0503

178 x 1219



SWISS OAK BEIGE 0848

178 x 1219



TWIST 0504

178 x 1219



SWISS OAK CASHMERE 0795

178 x 1219



DESIGN SHADE VARIATION



Light



Medium



High



Swiss Oak Beige / Swiss Oak Cashmere



White Lime



WHITE LIME 0584

178 x 1219



SUAVE LIGHT 0978

178 x 1219




SUCRE WHITE 0983

178 x 1219




Creation 30 Rigid

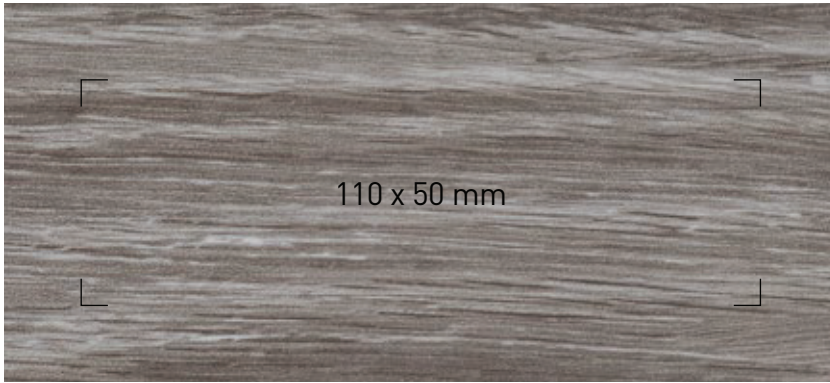

OXFORD 0061

178 x 1219 | 

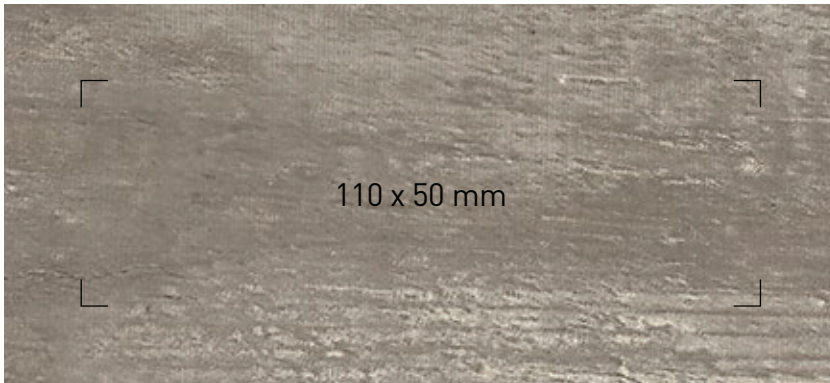

AMADOR 0447

178 x 1219 | 



Ranch



RANCH 0456


178 x 1219 | 

DESIGN SHADE VARIATION  Light  Medium  High

The embossing of the samples can differ from the final product.




BLOOM UNI TAUPE 0868
457 x 914

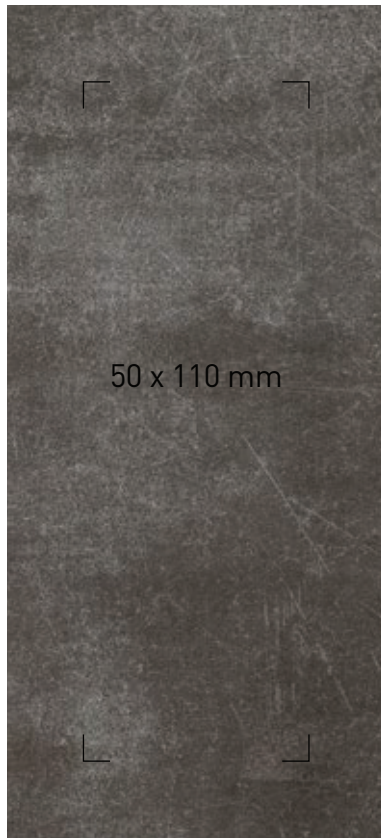

PARKER STATION 0374
457 x 914



PURE CONCRETE DARK 1062
457 x 914

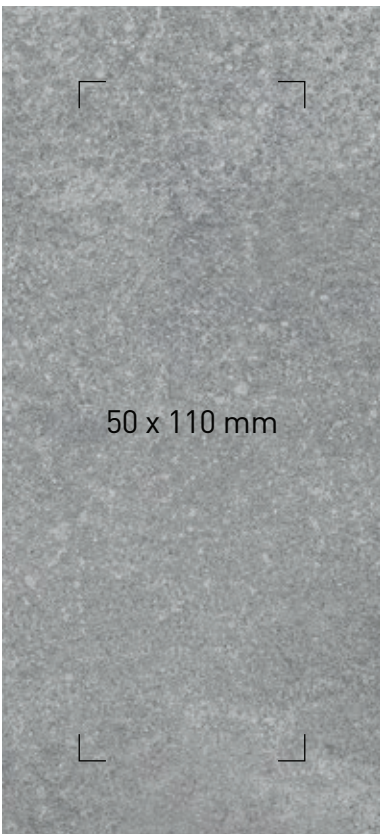

BLOOM UNI GREY 0869
457 x 914



Bloom uni grey

DESIGN SHADE VARIATION



Light




Medium



High

4D Design

Authentic tiles & planks



Ultra Matt Surface




Bevelled Edges



Crystal Wear Layer



High Definition Printed Film

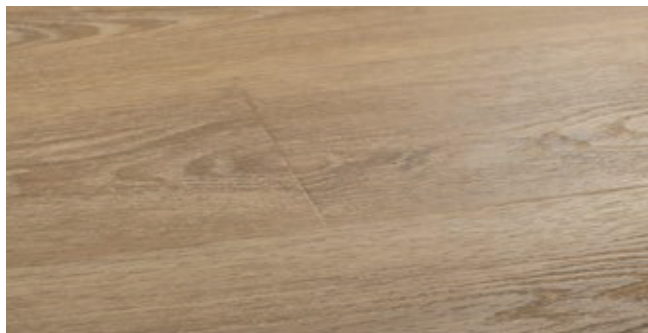

Creation



Creation



Standard LVT




Lounge oak Golden

More than a floor

Design skirting




Design coverstrip

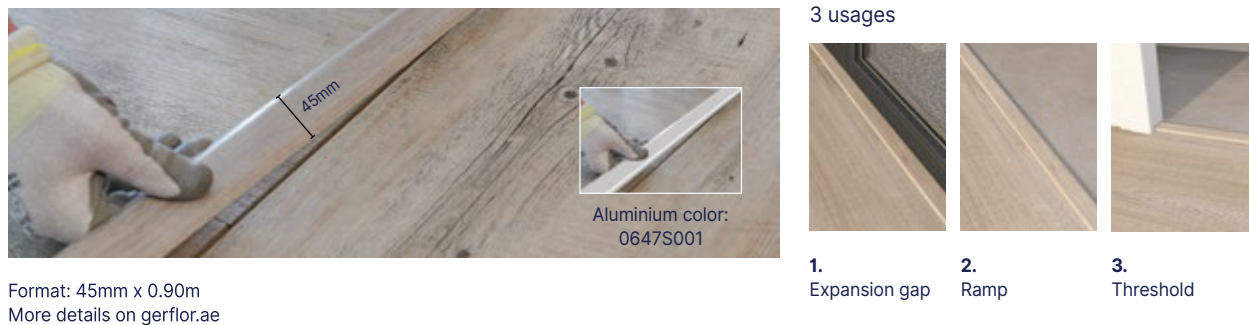

Entrance mat

Quickmat Tiles: Pre-adhesived planks (12mm thick)

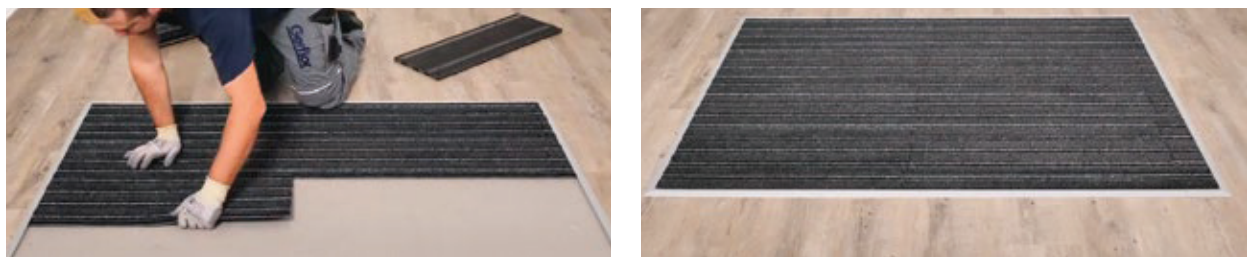

Code: 1725, profiles 1726 and angles 1727 - adapted to 4 to 6mm thick products

Tool



Anti-bounce mallet: 5951

Creation 30 Rigid

Description

Total Thickness	EN ISO 24346	mm	4.00
Thickness of the wearlayer	EN ISO 24340	mm	0.30
Weight	EN ISO 23997	g/m ²	7890
Size	ISO 24342	mm	178x1219 / 457x914
Number of planks or tiles per box / Sqm per box	-	-	8 / 1.73 m ² - 8 / 3.34 m ²

Classification

Norm/Product Specification	-	-	EN ISO 10582
European Classification	EN ISO 10874	Class	23 - 31
Fire Rating	EN 13 501-1	Class	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2
Slip Resistance Wet ⁽¹⁾	DIN 51130 / BGR 181	Class	R10

Performances

Wear Resistance	EN 660.2	mm ³	≤ 2.0
Wear Group	QB 30	Group	T
Type Binder content	EN ISO 10582	Type	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.08
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10
Impact sound insulation	EN ISO 717-2	dB	4
Room Impact	NF S 31074	dB	80
Castor chair test	ISO 4918	-	OK
Thermal Conductivity	EN ISO 10456	W/(m.K)	0.25
Colour Fastness	EN ISO 20105 - B02	Degree	≥ 6
Surface Treatment	-	-	ProtecShield™
Chemical Products Resistance	EN ISO 26987	-	OK

Environment / Indoor Air Quality

TVOC after 28 days	ISO 16000-6	μ / m ³	< 100
--------------------	-------------	--------------------	-------

CE Marking

	EN 14041	-	   
--	----------	---	---

(1) Ramp test with oil.

IMPORTANT: The information contained in this document is valid from 03/01/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

We care / We act Our Commitments for a Sustainable future


CARBON FOOTPRINT*
 -20 % kg CO₂ equivalent/m² between 2020 and 2025


BIOSOURCED CONTENT**
 10 % by 2025


RECYCLED CONTENT
 30 % by 2025


ADHESIVE FREE***
 35 % by 2025


ANNUAL VOLUME RECYCLED
 60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution