



## Creation 30 Rigid




BLOOM UNI TAUPE 0868  
457 x 914

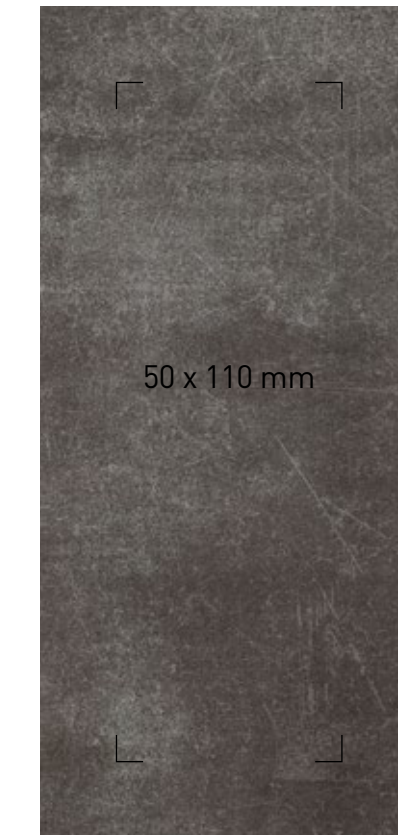

PARKER STATION 0374  
457 x 914

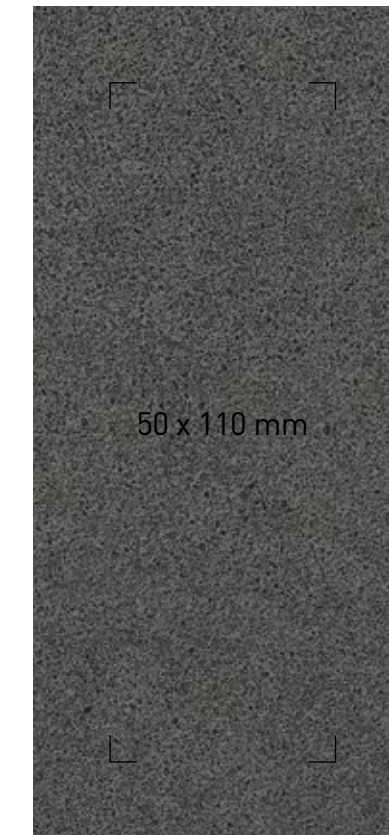

PURE CONCRETE DARK 1062  
457 x 914

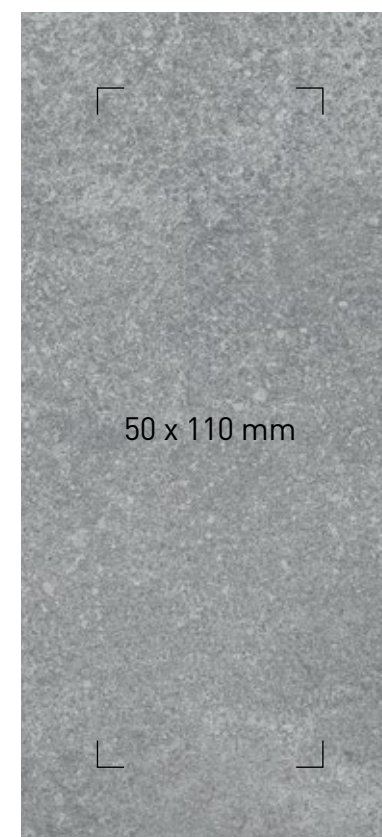

BLOOM UNI GREY 0869  
457 x 914



Bloom uni grey

DESIGN SHADE VARIATION Light Medium High

## Creation 30 Rigid

Formats (mm) 178x1219 457x914



### PROTECSHIELD™

#### ENHANCED PERFORMANCES



Micro scratch resistance



Easy maintenance

#### ULTRA MATT SURFACE




Natural look

#### 4D DESIGN




Authentic Look

#### HIGH DEFINITION PRINTED FILM



Ultra realism

#### STRUCTURED EMOSS



Ultra realistic surface

#### BEVELLED EDGES




Tiles & Planks effect

### RIGID CORE TECHNOLOGY

#### CRYSTAL WEAR LAYER



Authentic Look



Renovation over ceramic tiles 5mm/5mm

#### 60°C




Resistance against high temperature variation


### INTERLOCKING SYSTEM




Standard laminate installation



100% REACH PHTHALATE FREE (except recycled content)



100% RECYCLABLE UP TO 35% RECYCLED CONTENT



TVOC EMISSIONS BELOW DETECTION LEVEL (TVOC < 100µg/m³ after 28 days) NO FORMALDEHYDE



Can be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15dB



Code: 1798 - Format: 1m x 15m

Gerflor Acoustic Plus 19dB



Code: 0704 - Format: 0.98m x 15.31m

Gerflor installation guidelines on gerflor.ae

## Creation 30 Rigid

gerflor.ae / follow us

### Description

		Creation 30 Rigid	
Total Thickness	EN ISO 24346	mm	4.00
Thickness of the wearlayer	EN ISO 24340	mm	0.30
Weight	EN ISO 23997	g/m²	7890
Size	ISO 24342	mm	178x1219 / 457x914
Number of planks or tiles per box / Sqm per box	-	-	8 / 1.73 m² - 8 / 3.34 m²

### Classification

Norm/Product Specification	-	-	EN ISO 10582
European Classification	EN ISO 10874	Class	23 - 31
Fire Rating	EN 13 501-1	Class	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2
Slip Resistance Wet <sup>(1)</sup>	DIN 51130 / BGR 181	Class	R10

### Performances

Wear Resistance	EN 660.2	mm³	≥ 2.0
Wear Group	QB 30	Group	T
Type Binder content	EN ISO 10582	Type	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.08
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10
Impact sound insulation	EN ISO 717-2	dB	4
Room Impact	NF S 31074	dB	80
Castor chair test	ISO 4918	-	OK
Thermal Conductivity	EN ISO 10456	W/(m.K)	0.25
Colour Fastness	EN ISO 20105 - B02	Degree	≥ 6
Surface Treatment	-	-	ProtecShield™
Chemical Products Resistance	EN ISO 26987	-	OK

### Environment / Indoor Air Quality

TVOC after 28 days	ISO 16000-6	µ /m³	< 100
--------------------	-------------	-------	-------

### CE Marking

	EN 14041	-	
--	----------	---	--

(1) Ramp test with oil.

**IMPORTANT:** The information contained in this document is valid from 03/01/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

### We care / we act

Our Commitments for a Sustainable future



**CARBON FOOTPRINT™**  
-20 % kg CO<sub>2</sub> eq/okm<sup>2</sup>/m<sup>2</sup> between 2020 and 2025



**BIOSOURCED CONTENT™**  
10 % by 2025



**RECYCLED CONTENT**  
30 % by 2025



**ADHESIVE FREE™**  
35 % by 2025



**ANNUAL VOLUME RECYCLED**  
60 000 t by 2025

\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution

**Gerflor**



Luxury Vinyl Tile

Class 31



CREATION 30 RIGID



New Rigid interlocking offer

**Creation 30 Rigid**  
The Reference in LVT

**Gerflor**

## The only Saudi made Rigid LVT




LVT is produced in Saudi Arabia, Dammam 2<sup>nd</sup> Industrial city




The region's first LVT manufacturer



Exclusive designs



Lock system



Complete solution Underlayers, matting, matching skirtings and coverstrips



Bostonian Oak Honey