



# MACTILE



## YOUR FLOORING SOLUTION FOR PUBLIC BUILDING

- ▶ Surface quality => resistance to high traffic
- ▶ PU Treatment => reduced maintenance costs
- ▶ Mactile Classic: Anti-static (< 2 kV)

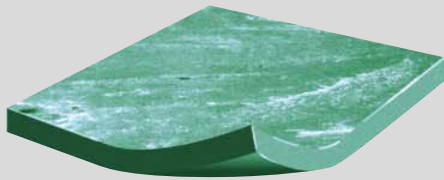

### DESIGN AND DECORATIVE SOLUTIONS

- ▶ Complete new contemporary colour selection

### ENVIRONMENTALLY RESPONSIBLE

- ▶ 100% recyclable product
- ▶ Made with more than 90% renewable resources (mineral quartz particles)
- ▶ Indoor air quality: low VOC emissions
- ▶ No heavy metals
- ▶ Made in KSA

CLASSIC	FLEXIBLE
 300x300 mm	 2 m

#### DESCRIPTION

Total thickness	EN ISO 24 356	mm	1.6 / 2.0	3.0	1.6 / 2.0	3.0
Weight	EN ISO 23 997	g/m <sup>2</sup>	3050 / 3920	6000	3050 / 3920	6000
Width / Length of sheets	EN ISO 24 341	cm/lm	-	-	200 / 10	200 / 10
Tile size	EN ISO 24 342	mm	300 x 300	300 x 300	-	-
Approx. number of tiles per box	-	-	90 / 70	46	-	-
Approx. area coverage per box	-	m <sup>2</sup>	8.10 / 6.30	4.14	8.10 / 6.30	4.14
Approx. weight per box	-	kg	25	25	-	-
Approx. coverage per roll	-	m <sup>2</sup>	-	-	20	20
Approx. gross weight of roll	-	kg	-	-	(1.60) 63 / (2.00) 83	115

#### CLASSIFICATION

Norm / Product specification			EN 654	EN 654	EN 649	EN 649
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43
Fire rating	EN 13 501 -1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Slip resistance wet	DIN 51 130	class	R9	R9	R9	R9
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2

#### PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 7.5	≤ 7.5	≤ 4.0	≤ 4.0
Wear group	EN 654	class	M	M	-	-
	EN ISO 10 581	class	-	-	P	P
Dimensional stability	EN ISO 23 999	%	Tiles ≤ 0,25	Tiles ≤ 0.25	Sheets ≤ 0.4	Sheets ≤ 0.3
Residual indentation	EN ISO 24 343-1	mm	≈ 0.03	≈ 0.03	≈ 0.03	≈ 0.03
Thermal conductivity	EN ISO 10456	W/(m.K)	0,25	0,25	0,25	0,25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26 987	class	OK	OK	OK	OK
Anti bacteria & fungicidal treatment	EN ISO 846	-	OK	OK	OK	OK
Surface treatment	-	-	PU	PU	PU	PU

- **DISSIPATIVE FLOORING (EL7):** available upon request.
- **ACCESSORIES:** Please contact us to get our complete offer of skirtings, welding rods and other accessories.
- **INSTALLATION:** We recommend to use our Bostik Adhesives and Self Levelling products. Please contact us to get further information about this range.

