



# DECOFRESC PROTECTION AND COVERING FRESCO - 2 MM ALL PUBLIC CONTEMPORARY

### APPLICATIONS .....

The contemporary Decofresc decorative frescoes provide an attractive setting in public buildings.

They bring a touch of elegance and customization while protecting walls and they meet hygiene and impact resistance requirements.


Solid colour and

antibacterial PVC

2 mm thick

### DESCRIPTION .....

- Model: all public contemporary Decofresc protection and covering decorative fresco
- Standard dimensions: 3 m x 1.30 m indivisible
- Thickness: 2 mm
- Material: antibacterial and Bs2d0
  fire-rated PVC, solid colour
- Surface finish: slightly textured and matte ("Hydr'X" finish)
- Fixing: adhesive bonding with SPM acrylic glue or SPM MS Polymer glue (no setting time, suitable for damp rooms, patent pending). Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range
- Colours: 39

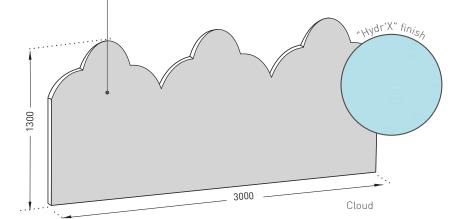

### SPECIFICATION .....

• Description: protection and covering decorative fresco (Cloud or Wave Decofresc as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 reaction to fire classification, glued full surface with ad hoc glue, with solid colour and slightly textured and matte surface ("Hydr'X" finish as manufactured by SPM). 3 m long, 1.30 m high (indivisible), 2 mm thick.

Colours available per product: please see the colour summary hinge

ני**ט**01

- Environment: the product's carbon footprint must be no more than 9.5 Kg Eq. CO<sub>2</sub>/sqm\* (namely < 0.95 E+01) for 25 years of use and must be validated by an EPD. More than 20% of the product must be made from recycled material. 100% of the product must be recyclable. Its formulation must be free from heavy metals (negligible values of below 50 ppm), as well as CMR1 and CMR2. The product must meet 7 HEQ targets (France). The emission level of volatile substance in inside air must be A+ class and under 15 µg/m<sup>3</sup> (according to ISO standard 16000-6).
  - \* Individual EPD certification is in progress: expected 2<sup>nd</sup> half 2024.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions (substrate, glue and installation context allowing the Bs2d0 level).

## NOTA

Frescoes made from cut-to-size Decochoc panels



Watch DECOCHOC panels installation video





Specifications and section drawings on our website www.spm-international.com



Wall protections and handrails Tel. : +33 (0)5 34 39 41 00 export@spm.fr www.spm-international.com

A company of Gerflor