




Also available  
in Decowood  
or Decotrend

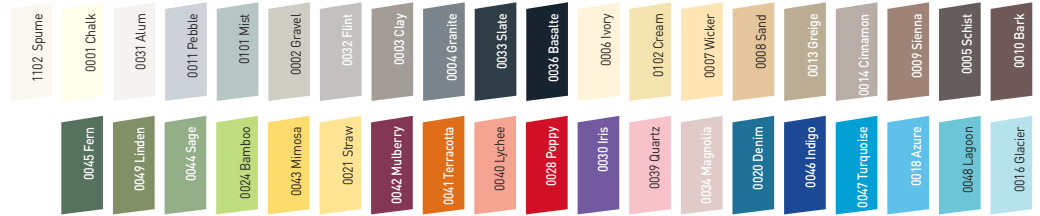

# HANDPLATES

PROTECTION AND COVERING PANEL - 2 MM  
DECOCHOC - DECORATIVE CUTOUTS -


Colours available per product: please see the colour summary hinge



## APPLICATIONS


These original shapes are used to decorate and protect doors from wear and dirt around handles.

Perfect for all collective institutions: schools, hotels, offices, restaurants, hospitals, retirement homes...

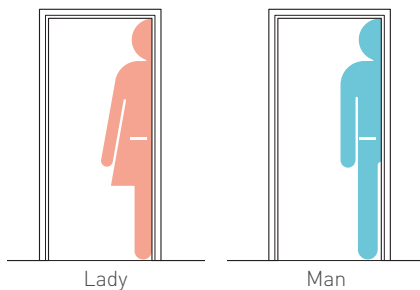


Lady

Man

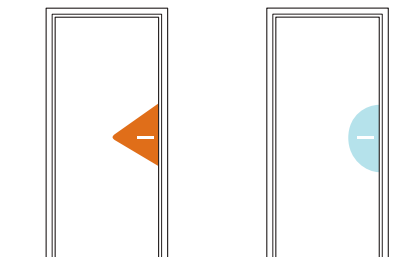


Delta

Plac'net

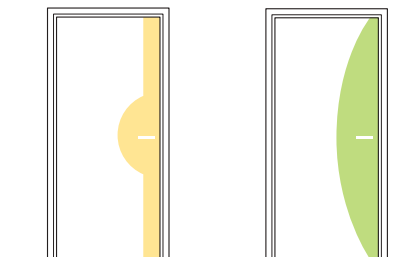

Nö

Glass

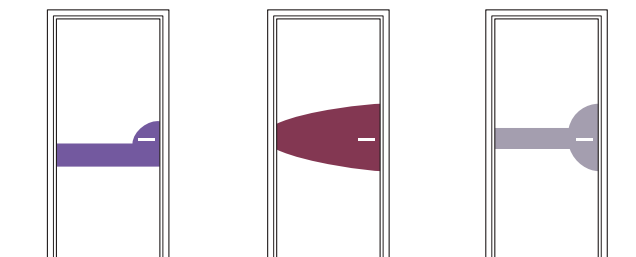

Eclipse

Wooden

Dan

## DESCRIPTION

- Model: mask of handplate with cut-to-size Decochoc panel
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured and matte («Hydr'X» finish)
- Fixing: adhesive or SPM acrylic glue or SPM MS Polymer glue (no setting time, suitable for damp rooms, patent pending).
- Colours: 39

## SPECIFICATION

- Description: handplates (Nö, Glass, Lady, Man, Wooden, Dan, Eclipse, Plac'net or Delta masks as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 reaction to fire classification, glued full surface with ad hoc glue, with solid colour and slightly textured and matte surface («Hydr'X» as manufactured by SPM), 2 mm thick.
  - Environment: the product's carbon footprint must be no more than 9.5 Kg Eq. CO<sub>2</sub>/sqm\* (namely < 0.95 E+01) for 25 years of use and must be validated by an EPD. More than 20% of the product must be made from recycled material. 100% of the product must be recyclable. Its formulation must be free from heavy metals (negligible values of below 50 ppm), as well as CMR1 and CMR2. The product must meet 7 HEQ targets (France). The emission level of volatile substance in inside air must be A+ class and under 15 µg/m<sup>3</sup> (according to ISO standard 16000-6).
- \* Individual EPD certification is in progress: expected 2<sup>nd</sup> half 2024.
- Colour: selected by architects from manufacturer's standard range.
  - Installation method: adhesive or glue as per manufacturer's instructions (substrate, glue and installation context allowing the Bs2d0 level).

Specifications and section drawings on our website [www.spm-international.com](http://www.spm-international.com)



BimObject in Revit and Archicad