




Also available  
in Decowood  
or Decotrend

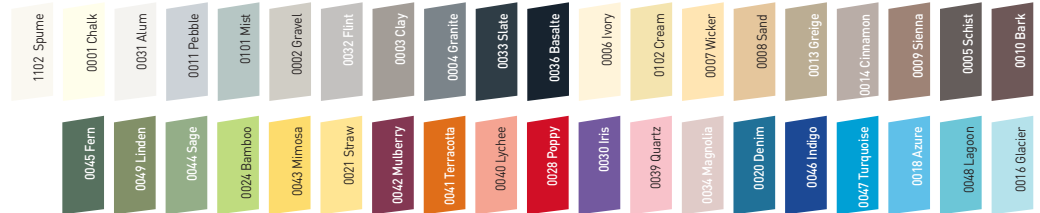

Colours available per product: please see the colour summary hinge

# FULL DOOR & HALF-HEIGHT DOOR

## PROTECTION AND COVERING PANEL - 2 MM

### DECOCHOC



#### APPLICATIONS

Protects and decorates doors in corridors and entrances to hospitals, clinics, retirement homes, schools, kitchens, restaurants, collective housing...

To avoid the handle and lock and facilitate installation, we recommend 1000 mm (lever handle alone) or 900 mm (lever handle with cylinder).

#### DESCRIPTION


- Model: cut-to-size Decochoc protection and covering panel
- Standard dimensions: 3 m x 1.30 m
- Custom options: cutting-to-size, chamfer
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured and matte («Hydr'x» finish)
- Fixing: adhesive bonding with SPM acrylic glue or SPM MS Polymer glue (no setting time, suitable for damp rooms, patent pending).
- Colours: 39

#### SPECIFICATION

- Description: protection and covering panel (Decochoc as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 reaction to fire classification, glued full surface with ad hoc glue, with solid colour and slightly textured and matte surface («Hydr'X» as manufactured by SPM), 2 mm thick.
- Environment: the product's carbon footprint must be no more than 9.5 Kg Eq. CO<sub>2</sub>/sqm\* (namely < 0.95 E+01) for 25 years of use and must be validated by an EPD. More than 20% of the product must be made from recycled material. 100% of the product must be recyclable. Its formulation must be free from heavy metals (negligible values of below 50 ppm), as well as CMR1 and CMR2. The product must meet 7 HEQ targets (France). The emission level of volatile substance in inside air must be A+ class and under 15 µg/m<sup>3</sup> (according to ISO standard 16000-6).  
*\* Individual EPD certification is in progress: expected 2<sup>nd</sup> half 2024.*
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions (substrate, glue and installation context allowing the Bs2d0 level).



**Recommended  
protection height: from  
900 mm to 1300 mm**

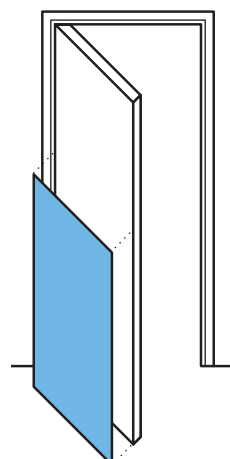

## PLAC'INOX STAINLESS STEEL PROTECTION PLATE

Specifications and section drawings on our website [www.spm-international.com](http://www.spm-international.com)



BimObject

BimObject in Revit and Archicad