

Hinge
sideRabbit
side

SAFY'DOOR

DOOR FINGER PROTECTION SYSTEM



APPLICATIONS

The door finger protection system Safy'Door is the ideal solution for making both single and swing doors safe.

The special shape of the strong, flexible bellows prevents fingers from getting into door rabbets.


The door finger protection system Safy'Door improves safety in locations frequented by young children as well as in workplaces, preventing a major cause of accidents and protecting staff from often serious after-effects.

DESCRIPTION

- Model: Safy'Door door finger protection system
- Height: 1.40 m
- Width: 170 mm (rabbit side) and 70 mm (hinge side)
- Material: 2 mm thick solid colour elastomer
- Surface finish: smooth
- Fixing: on pre-drilled aluminium cores
- Colours: 4

SPECIFICATION

- Description: door finger protection system (Safy'Door as manufactured by SPM) to prevent fingers being trapped when opening and closing doors, comprising two solid colour, flexible elastomer sections 1.40 m in height, that slot into two pre-drilled aluminium cores. The 7-bellows section is used on the inside door jamb (rabbit side) and can cover a 150-mm gap, with the bellows providing additional extension up to 190 mm. The 3-bellows section is used on the outside door jamb (hinge side) and is designed to move with the door, compressing on opening by 20 to 80 mm.
- Environment: no heavy metals are used in its formulation, nor PBT/BPA. 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: snap-fixes onto pre-drilled aluminium cores screwed to the door and frame.

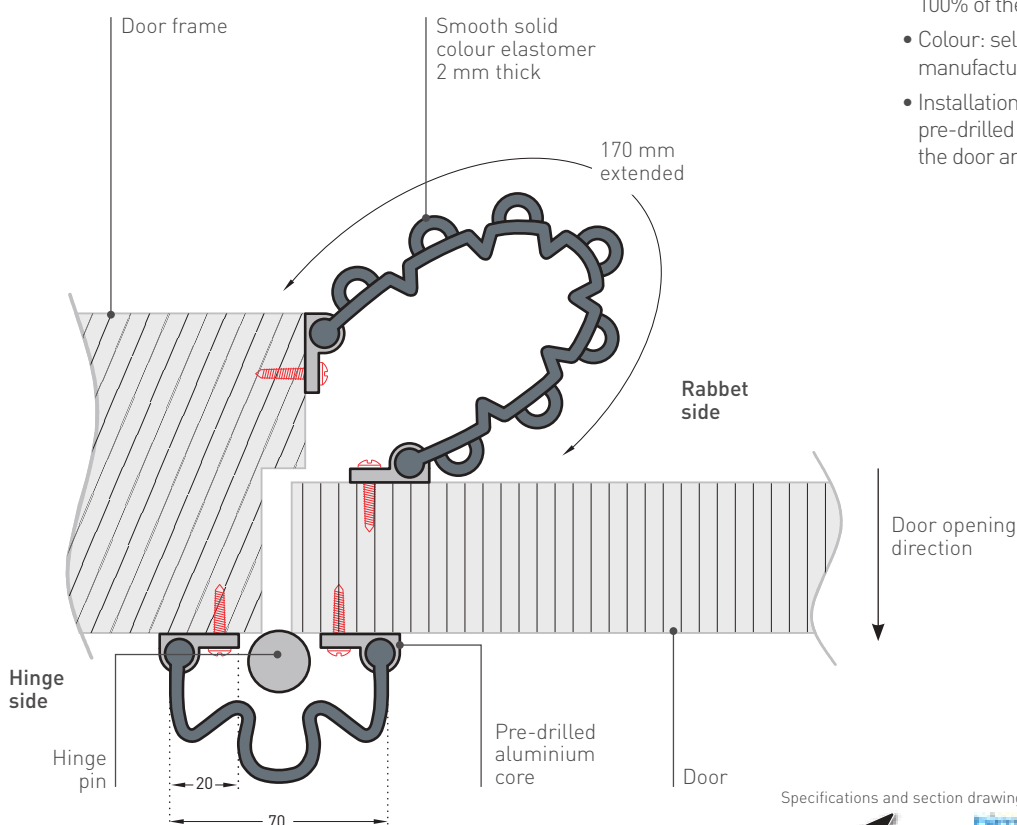

Specifications and section drawings on our website www.spm-international.com



Bimobject

BimObject in Revit and Archicad