



HALF-HEIGHT DECORATIVE DOOR

PROTECTION AND COVERING PANEL - 2 MM

DECOCHOC - DECORATIVE CUTOUTS -

ONE COLOUR

APPLICATIONS

These cutouts provide half-height protection and decoration for doors.

Ideal for use in corridors in public buildings: hospitals, schools, restaurants, hotels...





Shapes and colours make easier the location of different doors: rooms, staff rooms, technical premises, etc.

DESCRIPTION

- Description: one colour protection and covering masks with cut-to-size Decochoc panel
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured and matte («Hydr'X» finish)
- Fixing: adhesive bonding with SPM acrylic glue or SPM MS Polymer glue (no setting time, suitable for damp rooms, patent pending).
- Colours: 39

SPECIFICATION

- Description: half-height decorative one colour door protection (Iron, Wave, Mountain or Cubic masks as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 reaction to fire classification, glued full surface with ad hoc glue, with solid colour and slightly textured and matte surface («Hydr'X» as manufactured by SPM), 2 mm thick.
- Environment: the product's carbon footprint must be no more than 9.5 Kg Eq. CO₂/sqm* (namely < 0.95 E+01) for 25 years of use and must be validated by an EPD. More than 20% of the product must be made from recycled material. 100% of the product must be recyclable. Its formulation must be free from heavy metals (negligible values of below 50 ppm), as well as CMR1 and CMR2. The product must meet 7 HEQ targets (France). The emission level of volatile substance in inside air must be A+ class and under 15 µg/m³ (according to ISO standard 16000-6).
* Individual EPD certification is in progress: expected 2nd half 2024.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions (substrate, glue and installation context allowing the Bs2d0 level).

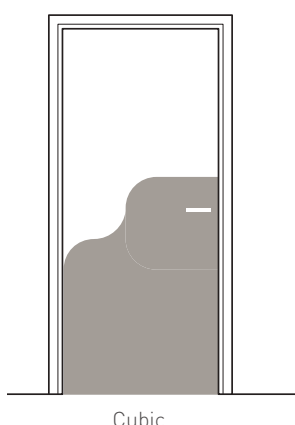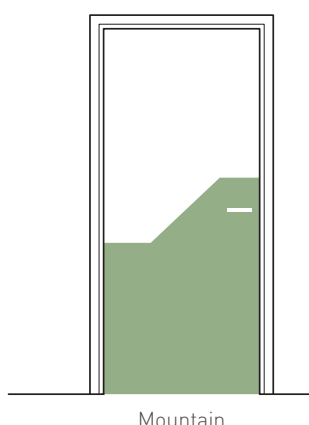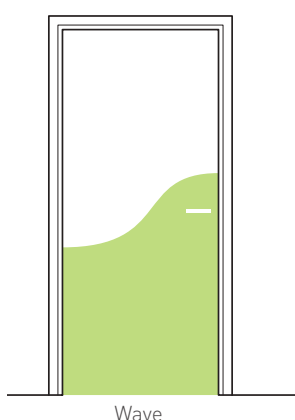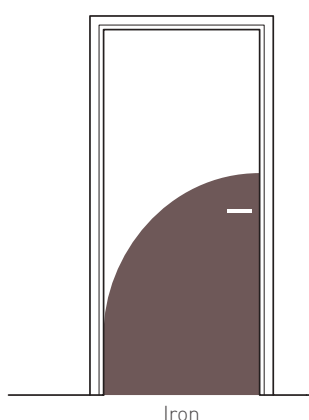



Also available
in Decowood
or Decotrend

Decochoc | 39 colours



Colours available per product: please see the colour summary hinge




TWO-COLOUR

APPLICATIONS


These half-door claddings protect and bring a touch of originality. This two-colour range provides visual help by using floor, department, service or section colour schemes, very useful in accessibility process.

DESCRIPTION


- Model: two-colour protection and covering masks with cut-to-size Decochoc panel
- Height: 1200 mm
- Width: 930 or 1230 mm
- Thickness: 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured and matte («Hydr'X» finish)
- Fixing: adhesive bonding with SPM acrylic glue or SPM MS Polymer glue (no setting time, suitable for damp rooms, patent pending).
- Colours: 39




Stratum




Cubic



Comma



Stairs



Rainbow



SPECIFICATION

- Description: half-height decorative two-colour door protection (Stratum, Cubic, Comma, Stairs, Rainbow) masks as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 reaction to fire classification, glued full surface with ad hoc glue, with solid colour and slightly textured and matte surface («Hydr'X» as manufactured by SPM). Width 930 or 1230 mm, height 1200 mm, 2 mm thick.
- Environment: the product's carbon footprint must be no more than 9.5 Kg Eq. CO₂/sqm* (namely < 0.95 E+01) for 25 years of use and must be validated by an EPD. More than 20% of the product must be made from recycled material. 100% of the product must be recyclable. Its formulation must be free from heavy metals (negligible values of below 50 ppm), as well as CMR1 and CMR2. The product must meet 7 HEQ targets (France). The emission level of volatile substance in inside air must be A+ class and under 15 µg/m³ (according to ISO standard 16000-6).

* Individual EPD certification is in progress: expected 2nd half 2024.

- Colour: selected by architect from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions (substrate, glue and installation context allowing the Bs2d0 level).

Specifications and section drawings on our website www.spm-international.com



BimObject

BimObject in Revit and Archicad