



Premium

Heterogeneous Sheet

Gerflor[®]

Sustainable by Design

55%

Bio & Recycled Content

20% Biocontent + 35% Recycled Content
= 55% Bio & Recycled Content

Premium flooring incorporates 20% crop residues from responsible sources by recycling discarded soy waste from the animal feed industry. This approach reduces reliance on fossil-based materials and lowers the overall carbon footprint, making it an **eco-friendly** choice.

Reduces Carbon Footprint



Thanks to its improved composition, Premium emits less CO₂ than average heterogeneous floorings, making it a **smart choice for decarbonizing your projects.**

With the urgency of climate change and the scarcity of natural resources, we are committed to reducing the environmental impact of our products.

Our R&D team has made significant progress with Premium by incorporating bio-sourced materials, cutting the carbon footprint of the product line by 20% without sacrificing performance.

Together, we can build a more sustainable future, one step at a time.

we care / we act

Premium:


Proven Performance Since 1987

Premium delivers unmatched durability with a high-density, pressed wear layer that provides exceptional strength without binders or fillers. It offers superior resistance to abrasion and heavy traffic, ensuring vibrant colors over time. With an impressive 40-mil wear layer, these timeless, lasting designs are built to withstand heavy loads, including OR beds.




Tested by Experts

We collaborated with Tente, a global leader in high-quality wheels and casters for industries such as healthcare, industrial applications, and mobility equipment, with a focus on hospital use.

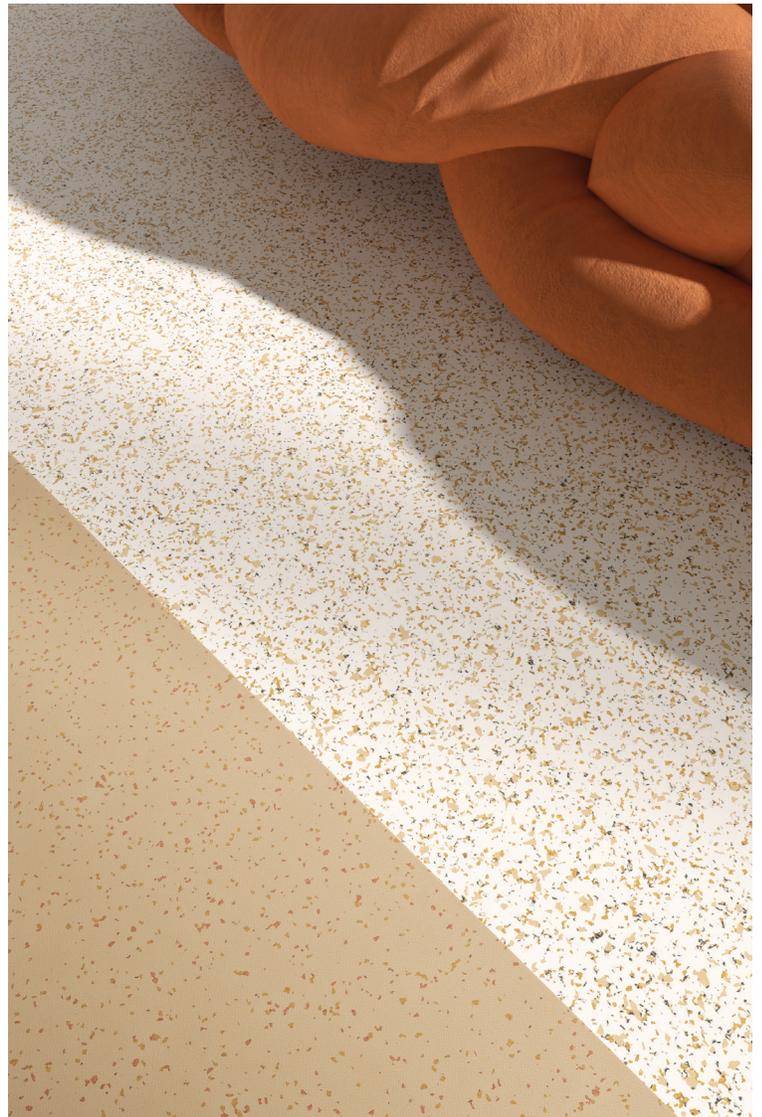

evercare™ **Matte Surface, Easy to Maintain**

Enhanced by patented EVERCARE™ technology, this matte surface ensures unmatched stain resistance and easy maintenance.

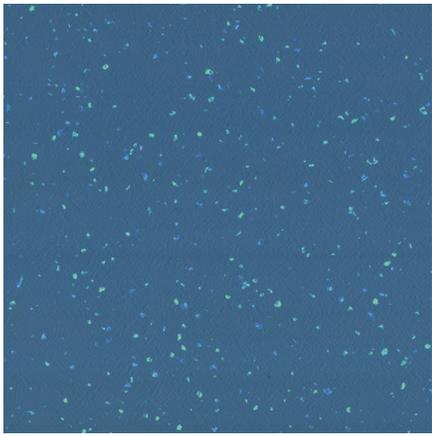


INDIANA – 4476 Wattaru




INDIANA – 4045 Dalupiri



INDIANA – 4009 Tufoa

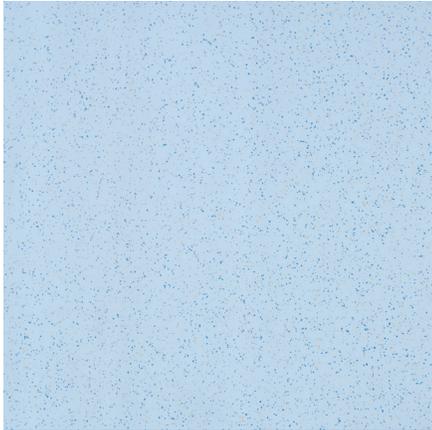

INDIANA – 4047 Okuza

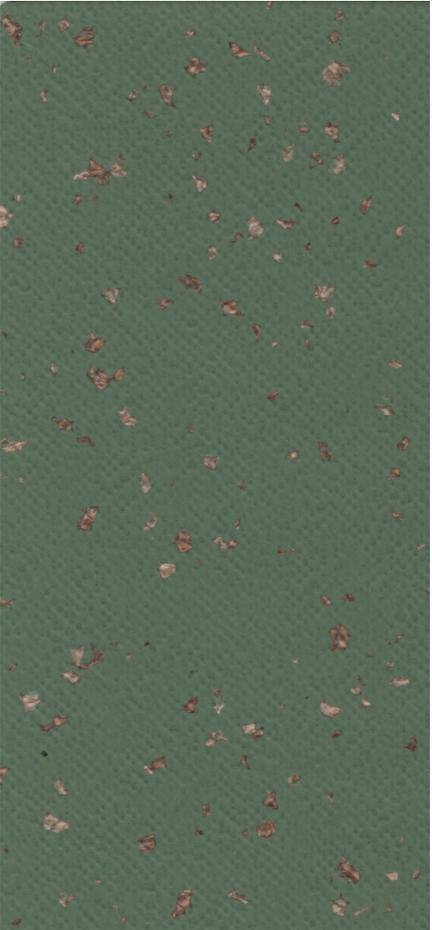


INDIANA – 7517 Faroe



INDIANA – 4053 Diwaran



INDIANA – 8837 Songo

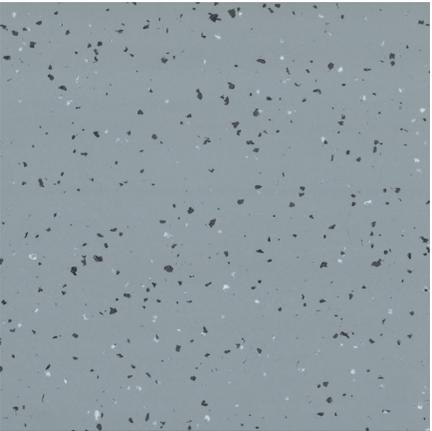

INDIANA – 4003 Tao



INDIANA – 4001 Ofu



Multiple Designs

Neoterra,
terrazzo inspiration with a touch of light


Metallica,
sophisticated, crystal-clear radiance

Poesy,
softness and delicacy with metallic sheen


Indiana,
vibrant, subtly contrasting faux smooth finish

Neopolis,
rough and deep, to reveal an urban look


Cocoon,
serene palette enhancing the beauty of recycled fibers

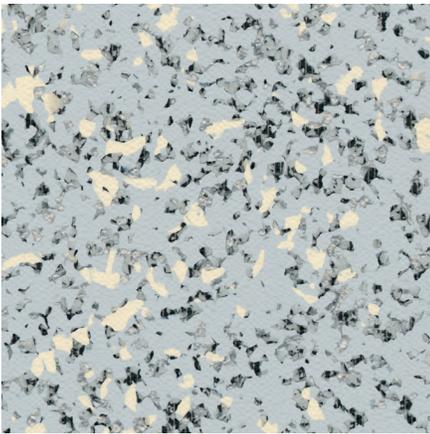


NEOPOLIS – 2745 Plaza

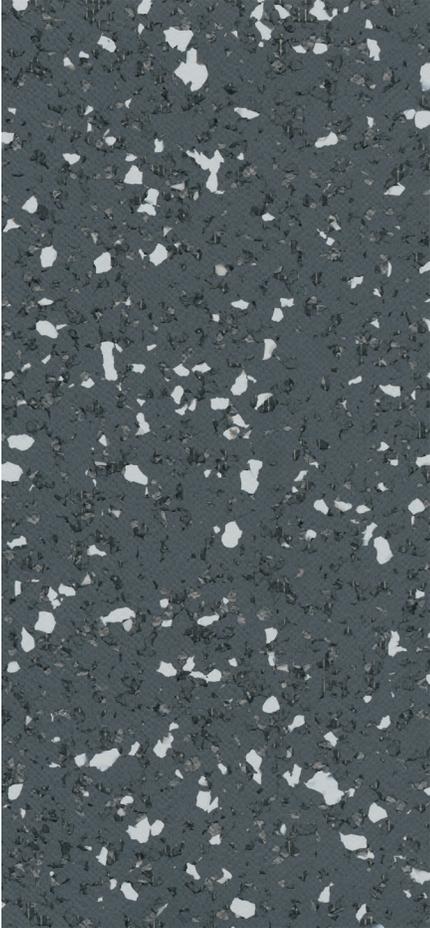


NEOPOLIS – 2741 Brooklyn

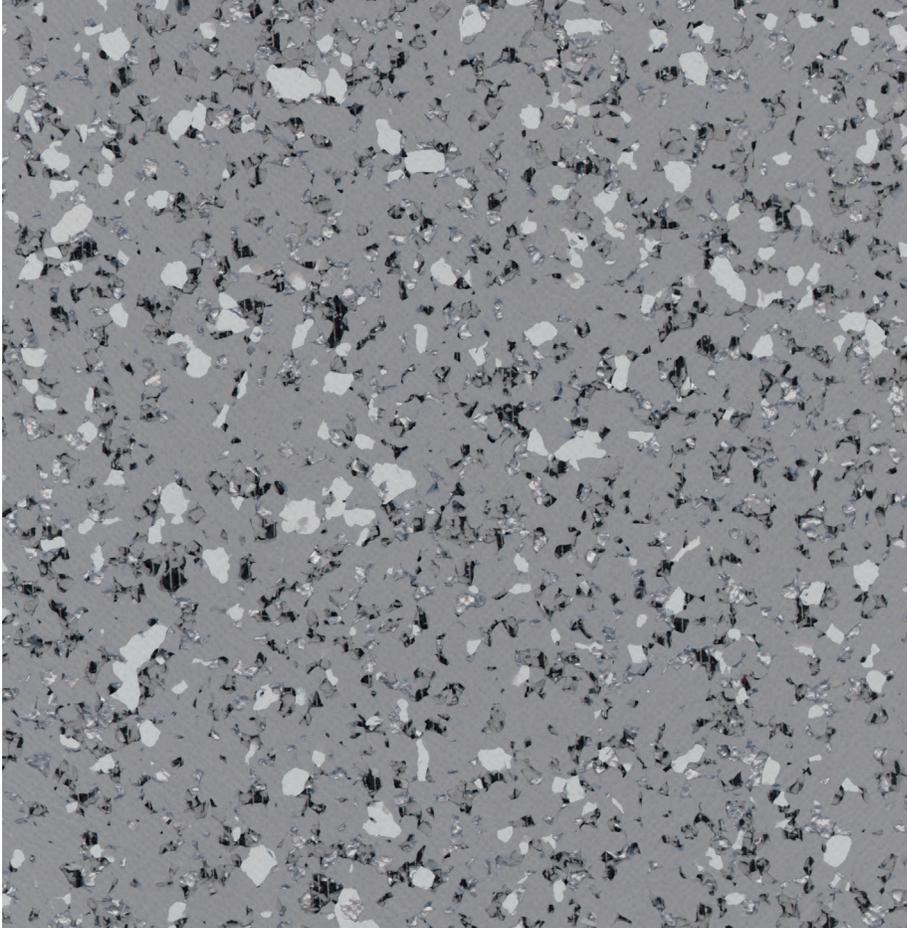

NEOPOLIS – 2740 Harlem Soft

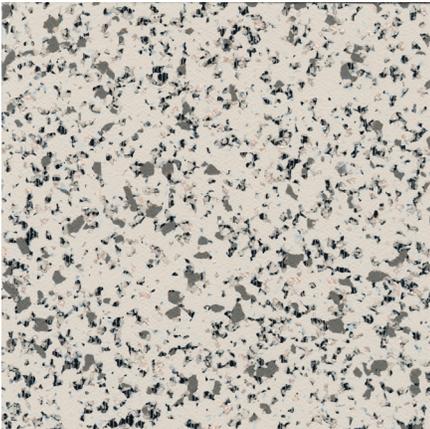

NEOPOLIS – 2743 Central Park

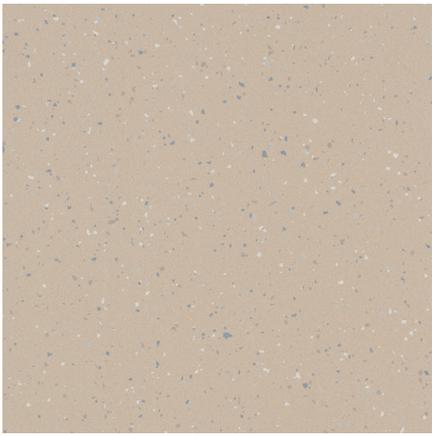

COCOON - 0032 Satin



COCOON - 0027 Muslin





COCOON - 0030 Crinolin




COCOON - 0028 Organza



COCOON - 0029 Flannel

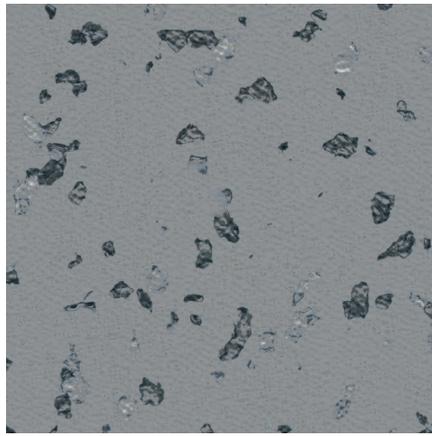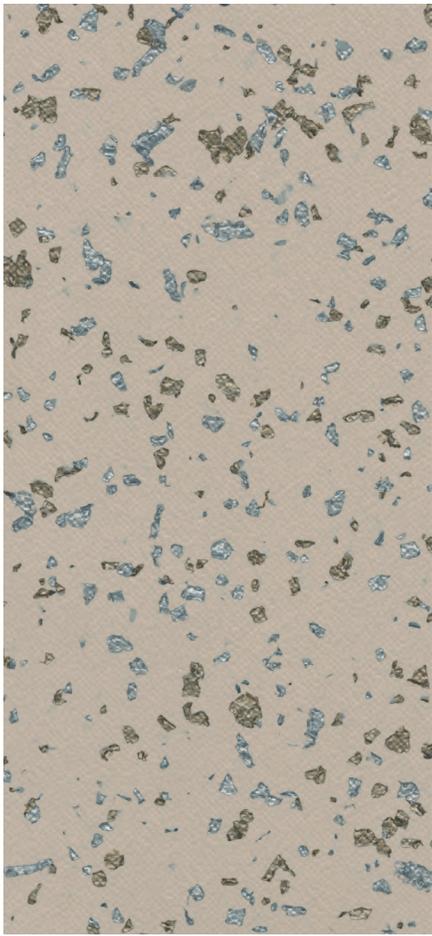


POESY - 2751 Slam

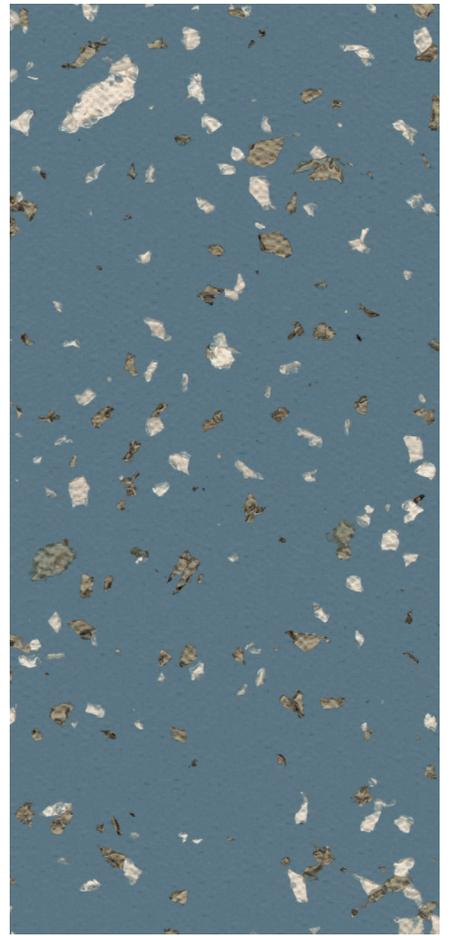

POESY - 8626 Rime

POESY - 2747 Ballade

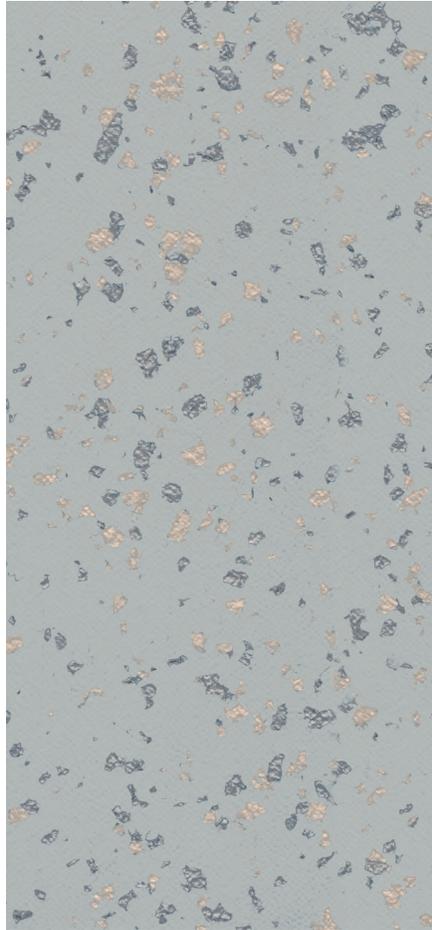


POESY - 2750 Ellipse



NEOTERRA - 4205 Dorata



METALLICA - 8257 Nyx

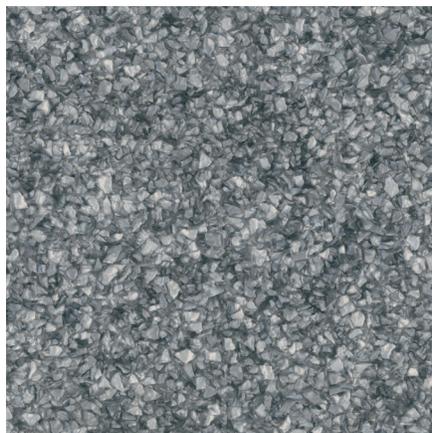

METALLICA - 9745 Cosmic



METALLICA - 0064 Sudri



GERFLOR USA
 877-437-3567
 samples@gerflorusa.com
 gerflorusa.com



GENA0152

DESCRIPTION	STANDARDS	REQUIREMENTS	PREMIUM
PRODUCT DESCRIPTION			
Reference Specification*	ASTM F1303	-	Type 1, Grade 1
Backing	ASTM F1303	-	Class B
Construction	-	-	Heterogeneous Sheet Flooring
Surface Treatment/Maintenance	-	-	Evercare™ / No wax for life
Wearlayer Thickness	ASTM F410	-	40 mil pure color
Gauge Total Thickness	ASTM F386	≥ 0.075"	0.080" (2.0 mm)
Roll Width	-	-	6' 6" (2.0 m)
Roll Length	-	-	66' (20 m)
Coverage / Roll	-	-	430 ft ² (40 m ²)
PERFORMANCE			
Static Load Resistance	ASTM F970	-	Meets Requirements
Indentation - Residual	ASTM F1914	-	Meets Requirements
Flexibility	ASTM F137	> 1.5"	Meets Requirements
Chemical & Stain Resistance	ASTM F925	-	Meets Requirements
Resistance to Heat	ASTM F1514	ΔE ≤ 8	Meets Requirements
Resistance to Light	ASTM F1515	ΔE ≤ 8	Meets Requirements
Impact Insulation (IIC)	ASTM E989 (ASTM E492)	-	IIC 58
Coefficient of Friction	ASTM D2047	-	0.64 (leather) / 0.87 (neolite)
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements
Fire Rating - Smoke Evolution	ASTM E648	Class 1	Meets Requirements
ENVIRONMENT HEALTH & SAFETY			
Bacterio-Static**	ISO 22196	-	Inhibits spread of infections at 99%
Viro-Static**	ISO 21702	-	Inhibits growth of virus of 99.7% after 2 hours
Manufacturing Plant Certifications	ISO 9001, 14001, 50001	-	Quality, Environment, Energy
Environmental Product Declaration (EPD)	LEED v4 M+R	-	Product-Specific Type III
Material Ingredients: Health Product Declaration (HPD)	LEED v4 M+R	-	Self-Declared
Sourcing of Raw Material: Recycled Content	Average Pre-Consumer Content	-	43%
No Harmful Chemicals	European Chemicals Agency (ECHA)	-	100% REACH Compliant
Indoor Air Quality	California Standard 01350	-	FloorScore® Certified
Production Waste	In-Plant Recycling	-	100% Manufacturing Waste Recycled
TVOC after 28 days	ISO 16000-6	-	<10µg/m ³
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com		

*Rubber leaves indelible stains on synthetic floorings: Do not use mats or any other products with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

** The best defense against the spread of infections is the implementation of an effective cleaning method. For the most updated documentation and specification content, please visit gerflorusa.com

PREMIUM USA Binder - 2025

