



Streamo Sailer

Marine flooring for ship interiors



Gerflor[®]

Customization available



Streamo Sailer

High performance non-directional homogeneous flooring

- 50
COLORS

Non-directional design,
elegant and masking
- For medium
to heavy duty traffic

100%
RECYCLABLE

22% recycled content
- Rolls 2 × 20 lm
Tiles 608 × 608 mm on demand

TVOC < 10 µg/m³
after 28 days

evercare™ An exclusive and Gerflor® patented surface treatment

Evercare™ By Gerflor®

Gerflor®: Even thickness

100% non-porous surface
Simple and easy stain removal

Other treated floor covering

Missing treatment and uneven thickness

Non-treated product

- ✓

Stain Shield
- Matt effect:
enhanced design & color,
long lasting appearance
- No wax for life
Water and detergent
saving**
- Anti-bacterial &
anti-viral activity**
ISO 22196 & ISO 21702

Don't forget our complementary ranges!

- Handrails
- Wall Coverings
& Protections
- Stair Nosing
- Entrance Mat
- Skirtings
& Profiles
- Welding Rods
- IMO
Adhesive


Streamo Sailer




Evercare™

100% Recyclable


Compact
2m

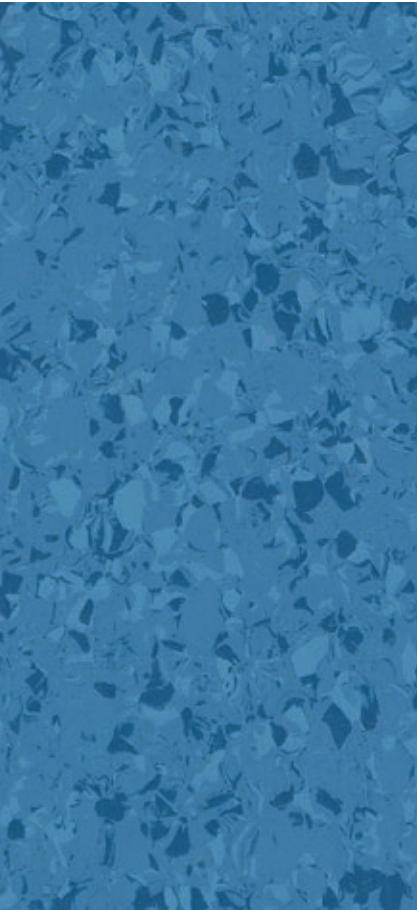


4446 Blue Ocean

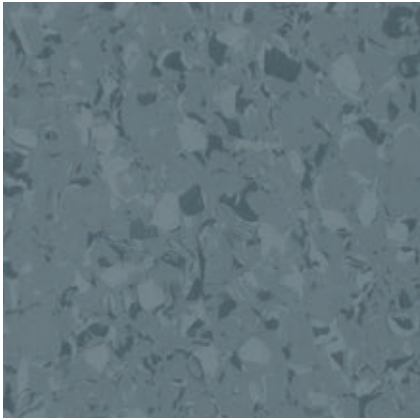


4450 Stormy Weather

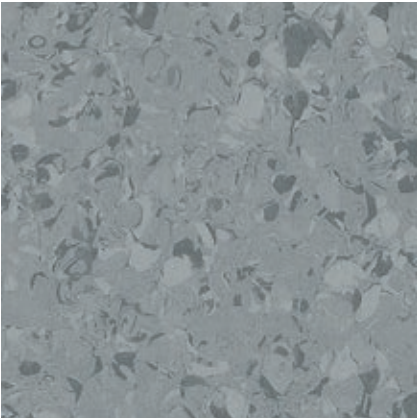


4430 Pearl Grey

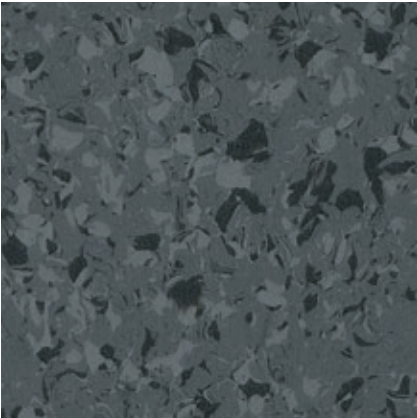


4459 Grey Storm

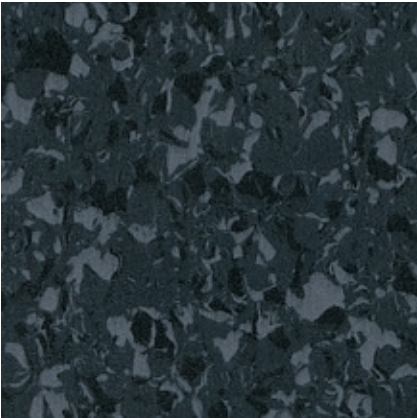


4460 Black Stone

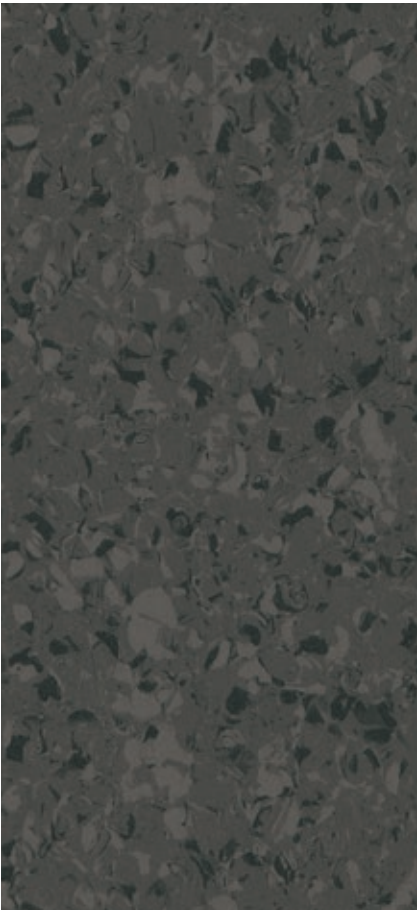


4445 Mocca

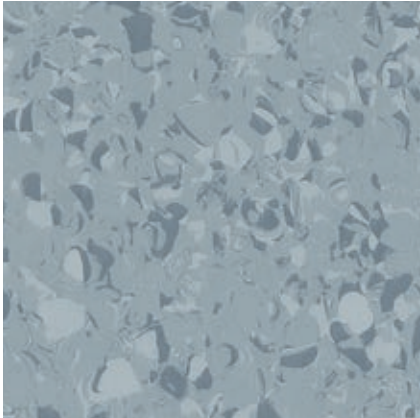


4420 Silver Grey

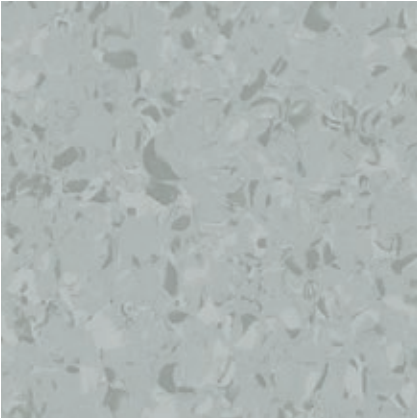


4429 Gray Opal

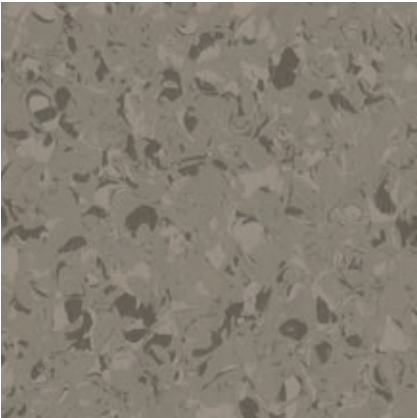


4463 Greige

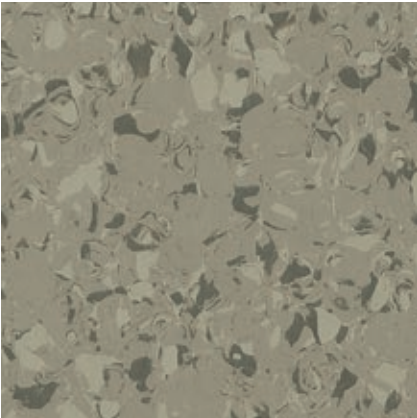


4443 Lime Taupe

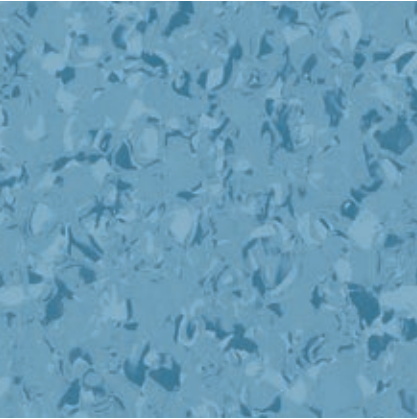

4416 Sapphire

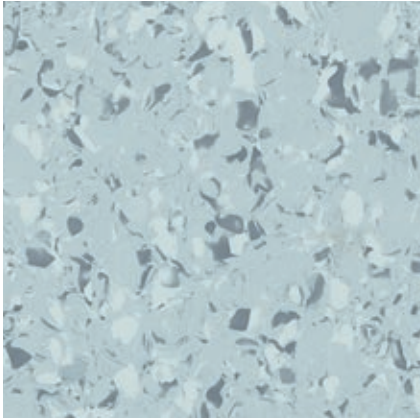

4410 Violet Grey

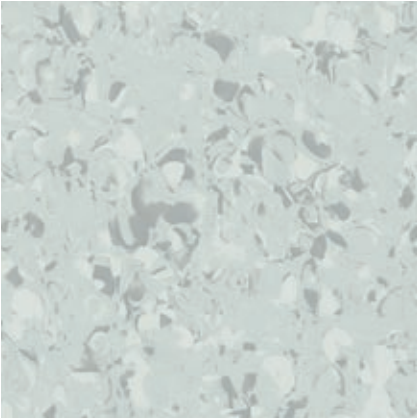


4409 Matte Grey




4403 Natural Shade




4424 Smoked Opal

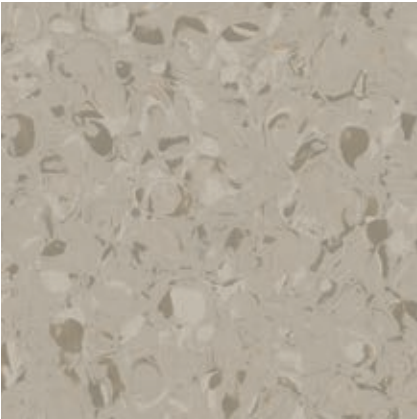

4441 Light Greige

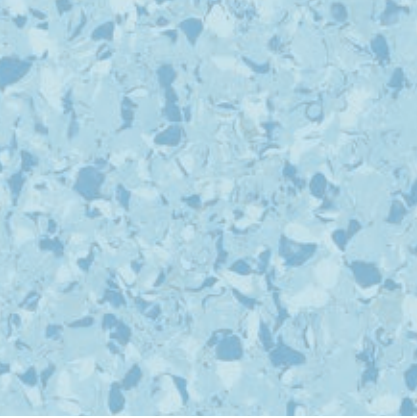

4496 Light Sapphire

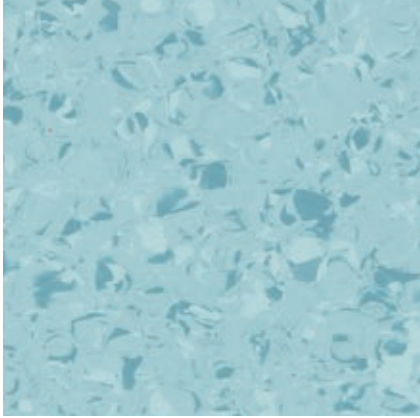

4417 Aquamarine



4408 Crystal Ice



4405 Sand Opal



4401 Quartz




Compact tiles (608 × 608 mm) available for a minimum quantity order of 500 sq.m


Streamo Sailer



Evercare™ | 100% Recyclable

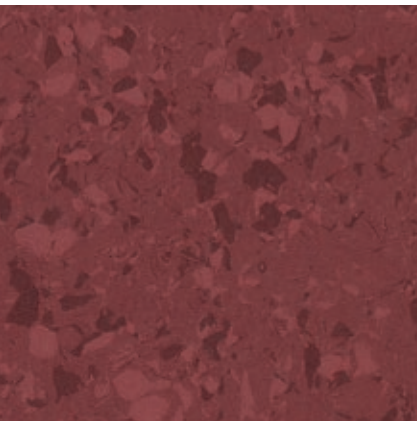

4448 Ruby

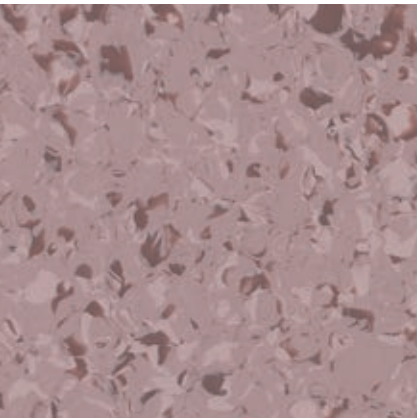


4437 Cashmere Rose



4455 Orange Sunlight



4425 Amber

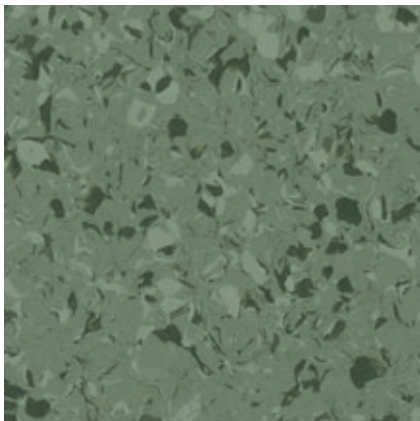

4457 Olivine



4432 Citrine




4447 Light Emerald


More colors available



4475 Cinabre




4482 Orchid



4411 Raffia



4402 Yuki



4435 Butternut



4481 Rosaspina



4412 Tundra




4404 Milkshake




4422 Mango




4476 Amethyst




4413 Marlyn




4428 Sandy




4467 Clover




4436 Santorini




4434 Cast Iron




4444 Havana Brown




4427 Pine Forest



4466 Thistle




4433 Ash Coat



4431 Exotic Mud




4407 Spearmint



4426 Baltic

 Compact tiles (608 × 608 mm) available for a minimum quantity order of 500 sq.m

Streamo Sailer

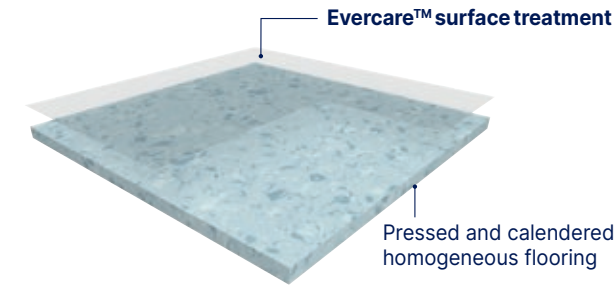

INSTALLATION
Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

MAINTENANCE
Maintenance should be carried out regularly to retain the appearance and durability of the floor.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

Description / Description / Beschreibung / Descripción / Descrição / Descrizione			
Total thickness / <i>Epaisseur totale</i> / Gesamtdicke / <i>Espesor total</i> / <i>Espessura total</i> / <i>Spessore totale</i>	EN ISO 24346	mm	2.0
Weight / <i>Poids</i> / Gewicht / <i>Peso</i> / <i>Peso</i> / <i>Peso</i>	EN ISO 23997	g/m²	2850
Width/length of sheet / <i>Largeur/longueur des lés</i> / Rollenbreite/Rollenlänge / <i>Ancho/largo de rollos</i> / <i>Largura/comprimento dos rolos</i> / <i>Larghezza/lunghezza dei teli</i>	EN ISO 24341	cm/lm	200/20
Tile size / <i>Format dalles</i> / Format Fliesen / <i>Dimensiones de las losetas</i> / Dimensões dos mosaicos / <i>Dimensione delle piastre</i>	EN ISO 24432	mm	608 × 608*
Sqm/Box / <i>m²/boîte</i> / Qm pro Karton / <i>m²/Bulto</i> / m²/Caixa / <i>m²/confezione</i>	-	-	7.39
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Fliesenanzahl pro Karton / <i>Cantidad de losetas/caja</i> / Quantidade dos mosaicos/caixa / <i>N° piastre per confezione</i>	-	-	20
Classification / Classification / Klassifizierung / Clasificaciones / Classificações / Classificazioni			
Norm/product specification / <i>Norme produit</i> / Produkt Norm / <i>Normas</i> / Normas / <i>Norma prodotto</i>	-	-	EN ISO 10581
	IMO Resolution	-	MSC 307 (88) Part 5
		-	MSC 307 (88) Part 2
	Maritime Approvals	-	Marine Equipment Directive
		-	UK-Marine Equipment Certification (MER)
		-	US Coast Guard
-		Transport Canada	
Fire rating / <i>Classement feu</i> / Brandverhalten / <i>Fuego</i> / Fogo / <i>Reazione al fuoco</i>			SOLAS 74
Static electrical propensity / <i>Potentiel de charge</i> / Begehaufladung / <i>Comportamiento electrostático</i> / Comportamento electrostatico / <i>Potenziale di carica</i>	EN 1815	kV	< 2
Performance / Performances / Technische Eigenschaften / Cualidades Técnicas / Performances / Caratteristiche Tecniche			
Wet Slip resistance / <i>Anti-glissance à l'humide</i> / Rutschverhalten bei Nässe / <i>Resistencia de deslizamiento en mojado</i> / Antideslizamento condições no molhado / <i>Indice di antiscivolosità con superficie bagnata</i>	EN 16165 App B	class	R10
Type Binder content / <i>Teneur en agent liant</i> / Bindenmittelgehalt	ISO 10581	type	I
Dimensional stability / <i>Stabilité dimensionnelle</i> / Maßstabilität / <i>Estabilidad dimensional</i> / Estabilidade dimensional / <i>Stabilità dimensionale</i>	EN ISO 2399	%	Sheet ≤ 0.40 / Tile ≤ 0.25
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / Punçoamento / <i>Impronta</i> (Norm)	EN ISO 24343-1	mm	< 0.10
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / Punçoamento / <i>Impronta</i> (average measured value)	EN ISO 24343-1	mm	~ 0.02
Thermal conductivity / <i>Conductivité thermique</i> / Wärmeleitfähigkeit / <i>Resistencia térmica</i> / Resistência térmica / <i>Resistenza termica</i>	EN ISO 10456	W/(m.K)	0.25
Colour fastness / <i>Solidité lumière</i> / Lichtechtheit / <i>Resistencia a la luz</i> / Estabilidade das cores / <i>Solidità alla luce</i>	EN 20 105 - B02	degree	≥ 6
Chemical resistance / <i>Résistance aux produits chimiques</i> / Verhalten gegenüber Chemikalien / <i>Resistencia a los productos químicos</i> / Resistência aos produtos químicos / <i>Resistenza ai prodotti chimici</i>	EN ISO 26987	-	OK
Surface treatment / <i>Traitement de surface</i> / Oberflächenvergütung / <i>Tratamiento de superficie</i> / Tratamento de superfície / <i>Trattamento di superficie</i>	-	-	EVERCARE™
Anti-bacterial activity (E.coli – S. aureus – MRSA) after 24h ⁽¹⁾ / <i>Activité anti-bactérienne</i> / Antibakterielle Aktivität / <i>Actividad antibacterial</i> / Atividade antibacteriana / <i>Azione batterio-statica</i>	ISO 22196	Class	> 99 % inhibits growth
Antiviral activity (Human Coronavirus) / <i>Activité anti-viral (Coronavirus humain)</i> / Antivirale Aktivität (Humanes Coronavirus 229E) / <i>Actividad antiviral (Coronavirus humano)</i> / Atividade antiviral (Coronavirus humano) / <i>Attività antivirale (coronavirus umano)</i>	ISO 21702	-	After 2 h > 99,7% virucidal activity
Environment / Indoor Air Quality			
TVOC after 28 days / <i>TVOC après 28 jours</i> / TVOC (28 Tage) / <i>TVOC (28 dias)</i> / TVOC (28 dias) / <i>TVOC (28 giorni)</i>	ISO 16000-6	µg/m³	< 10
Certification / <i>Zertifikat</i> / Certificado / <i>Certificazione</i>	-	-	Floorscore®

* Products available in tiles for a minimum quantity order of 500 sqm

IMPORTANT:
The information contained in this document is valid from 1/05/2025 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.



we care / we act

Our Commitments for a Sustainable future

Streamo Sustainable Solutions



CARBON FOOTPRINT*
-20 % kg CO₂ equivalent/m² between 2020 and 2025



RECYCLED CONTENT
25 % by 2025



LOW VOC PRODUCT
Indoor air quality



PRE-CUT SERVICES
saving waste & installation time



* Scopes 1 and 2 defined in the GHG protocol