


TARAFLEX® SPORT M PERFORMANCE

MADE FOR COMPETITIVE SPORTS LEVEL

Taraflex® Sport M Performance is the outcome of more than 60 years' experience.

- ▶ ASTM F2772 Class 3: $\geq 34\%$ – $< 46\%$ shock absorption
- ▶ Ball bounce: $\geq 96\%$
- ▶ Impact Protection Index (IPI): 82%
- ▶ Dual density foam
- ▶ Provides superior safety and shock absorption
- ▶ Triple-Action **Protectsol** for anti-friction burns
- ▶ Great for permanent and portable volleyball courts
- ▶ Available with Dry-Tex™ System for the highest moisture tolerance: 100% RH (25 LB)
- ▶ Available with Taraflex® Triple Strength Fiberglass: **D-Max+**

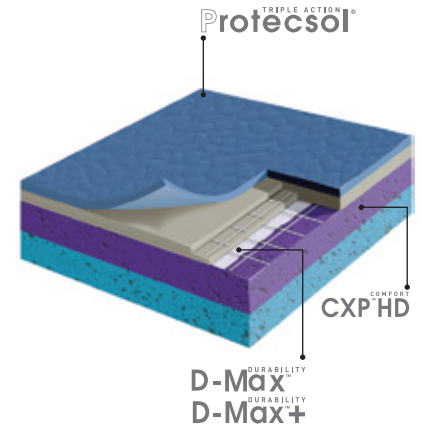

IPI = 82%



TARAFLEX® SPORT M PERFORMANCE

| DESCRIPTION | STANDARDS | REQUIREMENTS | WOOD DESIGNS | SOLID COLORS | MY TARAFLEX® |
|--|---|------------------|---|-----------------|--------------|
| PRODUCT DESCRIPTION | | | | | |
| Surface Treatment | – | – | Protecsol ^{STRIPLE ACTION} | | |
| Homogeneous Construction* | – | – | D-Max ^{DURABILITY} | | |
| Foam Backing | – | – | Double Density CXP HD+ ^{COMFORT} | | |
| Total Thickness | – | – | 0.35" (9 mm) | | |
| Total Top Layer | – | – | 0.08" (2.1 mm) | | |
| Weight | – | – | 1.1 lb/ft² (5.2 kg/m²) | | |
| Roll Width | – | – | 4' 11" (1.5 m) | | |
| Roll Length | – | – | 86' 6" (26.4 m) | 67' 3" (20.5 m) | |
| SPORT PROPERTIES | | | | | |
| Shock Absorption (Safety) | ASTM F2772 | Class 1 | Class 3 | | |
| Vertical Deformation | ASTM F2772 | ≤ 0.12" (≤ 3 mm) | Pass | | |
| Sliding Effect | ASTM F2772 | 80 - 110 | Pass | | |
| Ball Rebound | ASTM F2772 | ≥ 90% | ≥ 96% | | |
| Anti-Friction Burns | – | – | Protecsol ^{STRIPLE ACTION} | | |
| TECHNICAL CHARACTERISTICS | | | | | |
| Resistance to a Rolling Load | EN 1569 | ≥ 1500 N | Meets Requirements | | |
| Chemical & Stain Resistance | ASTM F925 | - | | | |
| Fire Rating - Flame Spread | ASTM E648 | Class 1 | | | |
| Fire Rating - Flaming | ASTM E662 | 450 or less | | | |
| Fire Rating - Non-Flaming | ASTM E662 | 450 or less | | | |
| ENVIRONMENT HEALTH & SAFETY | | | | | |
| Bacterio-Static** | ISO 22196 | - | Inhibits spread of infections at 99% | | |
| Viro-Static** | ISO 21702 | - | Inhibits growth of virus of 99.7% after 2 hours | | |
| Manufacturing Plant Certifications | ISO 9001, 14001, 50001 | - | Quality, Environment, Energy | | |
| Environmental Product Declaration (EPD) | LEED v4 M+R | - | Product-Specific Type III | | |
| Material Ingredients: Health Product Declaration (HPD) | LEED v4 M+R | - | Self-Declared | | |
| No Harmful Chemicals | European Chemicals Agency (ECHA) | - | 100% REACH Compliant | | |
| Sourcing of Raw Material: Recycled Content | Average Pre-Consumer Content | - | 32% | | |
| Indoor Air Quality | California Standard 01350 | - | FloorScore® Certified | | |
| Production Waste | In-Plant Recycling | - | 100% Manufacturing Waste Recycled | | |
| TVOC after 28 days | ISO 16000-6 | - | < 100µg/m² | | |
| WARRANTY | 15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions | | | | |

*Rubber leaves indelible stains on synthetic floorings. Do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**The best defense against the spread of infections is the implementation of an effective cleaning method.