


TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE USE

Taraflex® Sport M Plus provides excellent levels of comfort and safety suited to all types of sports combined with some multipurpose activities.

- ▶ ASTM F2772 Class 3
- ▶ Superior Indentation Resistance: Improved shock absorption without sacrificing indentation resistance
- ▶ Absorption ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 76 %
- ▶ Dual density foam
- ▶ No-wax for life—ease of maintenance
- ▶ Available with Gerflor Dry-Tex System
 - ▶ Highest moisture tolerance: 100% RH (25 lb)
 - ▶ Up to 70% cost savings compared to third party mitigation systems
 - ▶ Full-spread adhesive installation method: no risk of mold

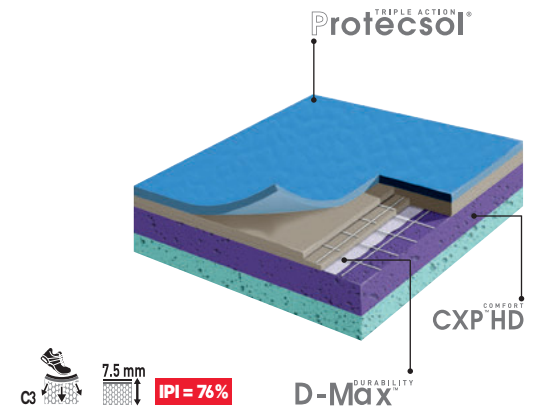

6758 Silver Gray	6873 Anthracite	6211 Gold	6570 Mint Green	4345 Ecu
6038 Terracotta	6180 Red	0006 Crimson	6557 Forest	2404 London Light Blue
6445 Lagoon	6430 Blue	0012 Navy Blue	6457 Blueberry	0003 Royal Blue
6830 Black	5763 Maple	6375 Oak	6350 Light Cherry	6391 Wood Grey
7019 Wood Crosscut	7020 Golden Herringbone	4536 Wood Dark Blue	6390 Wood Red	4535 Wood Forest Green

TARAFLEX® SPORT M PLUS

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS	MY TARAFLEX®
PRODUCT DESCRIPTION					
Surface Treatment	–	–	ProtecSol ^{TRIPLE ACTION}		
Homogeneous Construction*	–	–	D-Max ^{DURABILITY}		
Foam Backing	–	–	Double Density CXP HD+ ^{COMFORT}		
Total Thickness	–	–	0.30" (7.5 mm)		
Total Top Layer	–	–	0.08" (2.1 mm)		
Weight	–	–	0.94 lb/ft² (4.6 kg/m²)		
Roll Width	–	–	4' 11" (1.5 m)		
Roll Length	–	–	86' 6" (26.4 m)	67' 3" (20.5 m)	
SPORT PROPERTIES					
Shock Absorption (Safety)	ASTM F2772	Class 1	Class 3		
Vertical Deformation	ASTM F2772	≤ 0.12" (≤ 3 mm)	Pass		
Sliding Effect	ASTM F2772	80 - 110	Pass		
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%		
Anti-Friction Burns	–	–	ProtecSol ^{TRIPLE ACTION}		
TECHNICAL CHARACTERISTICS					
Resistance to a Rolling Load	EN 1569	≥ 1500 N	Meets Requirements		
Chemical & Stain Resistance	ASTM F925	–			
Fire Rating - Flame Spread	ASTM E648	Class 1			
Fire Rating - Flaming	ASTM E662	450 or less			
Fire Rating - Non-Flaming	ASTM E662	450 or less			
ENVIRONMENT HEALTH & SAFETY					
Bacterio-Static**	ISO 22196	–	Inhibits spread of infections at 99%		
Viro-Static**	ISO 21702	–	Inhibits growth of virus of 99.7% after 2 hours		
Manufacturing Plant Certifications	ISO 9001, 14001, 50001	–	Quality, Environment, Energy		
Environmental Product Declaration (EPD)	LEED v4 M+R	–	Product-Specific Type III		
Material Ingredients: Health Product Declaration (HPD)	LEED v4 M+R	–	Self-Declared		
No Harmful Chemicals	European Chemicals Agency (ECHA)	–	100% REACH Compliant		
Sourcing of Raw Material: Recycled Content	Average Pre-Consumer Content	–	34%		
Indoor Air Quality	California Standard 01350	–	FloorScore® Certified		
Production Waste	In-Plant Recycling	–	100% Manufacturing Waste Recycled		
TVOC after 28 days	ISO 16000-6	–	< 100µg/m²		
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions				

*Rubber leaves indelible stains on synthetic floorings. Do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**The best defense against the spread of infections is the implementation of an effective cleaning method.