



98%
Natural

DLW Linoleum

Marmorette - Colorette

Uni Walton - Lino Art

Creative by Nature

Gerflor®



Summary

- 04. **DLW, the genuine linoleum brand**
- 05. **Key benefits of Linoleum**
- 06. **Natural composition**
- 07. **Cradle to Cradle**
- 08. **Circular economy & Carbon neutral**
- 09. **Gerflor Second Life & Eco Labels**
- 10. **Protective by Nature**
- 12. **The most complete offer**
- 13. **Compact Linoleum**
 - 14. Product range
 - 29. Description text
 - 30. Technical data
- 31. **Acoustic Linoleum**
 - 32. Product range
 - 34. Description text
 - 35. Technical data
- 36. **Technic Linoleum**
 - 37. Product range
 - 38. Description text
 - 39. Technical data
- 40. **More than a floor**
- 42. **Cleaning instructions**
- 44. **Mix & Match**
- 46. **The proof is in the customer experience**

gerflor.com / follow us:



Serving architecture since 1882

- **1863:** Invention of Linoleum by Sir Frederic Walton.
- **1882:** Foundation of DLW, the first linoleum brand in Germany and its factory is based in Delmenhorst (Germany)



Historicism
1913
Gabriel von Seidl
Cityhall, **Bremen**



Bauhaus
1927
Mies van der Rohe
Gropius Weissenhofsiedlung, **Stuttgart**



Modern Movement
1957
Le Corbusier
Heilsberger apartments, **Berlin**



Contemporary - Mars 1976 Movement
1992
Jean Nouvel
Hôtel Les Thermes, **Dax**



Contemporary - Experimental & Minimalism
2008
Herzog & Demeuron
Olympic Stadium, **Beijing**



DLW, the genuine
Linoleum brand
part of Gerflor group
since 2018

Key Benefits of Linoleum



Durability

- Inlaid product construction
Long lasting appearance
- Hardwearing
Adapted to high pedestrian and mechanical traffic
- Micro scratch resistance
No problem with tearings and scratches



Health

- Third part certified antiviral and antibacterial activity
Hygienic solution
- Very low emissions
TVOC < 10 microgram/m³ after 28 days
Best indoor air quality
- Neocare™ surface treatment (dirt and stain barrier)
Easy to clean



Comfort

- Resilient and soft surface
Child friendly
- Up to 19dB sound insulation
Acoustic comfort
- Suitable for underfloor heating
Thermal comfort



Design

- Selection of designs and colors
Freedom of choice
- Matt effect
Contemporary finish
- Mix and match possibilities
Creativity and differentiation



DLW Linoleum Creative by Nature

98%

natural

76%

Rapidly renewable

Up to 40%

Recycled content

41%

Linseed oil



20%

Wood flour



19%

Limestone




8%

Jute



5%

Resin



3%

Coloured pigments



2%

Cork




To fight climate emergency and natural resources depletion, every choice counts. DLW Linoleum is a 98% natural, low carbon and circular flooring solution.

we care / we act

Sustainable by Nature

Cradle to Cradle
Certified™ SILVER⁽¹⁾

Developed using circular economy principles

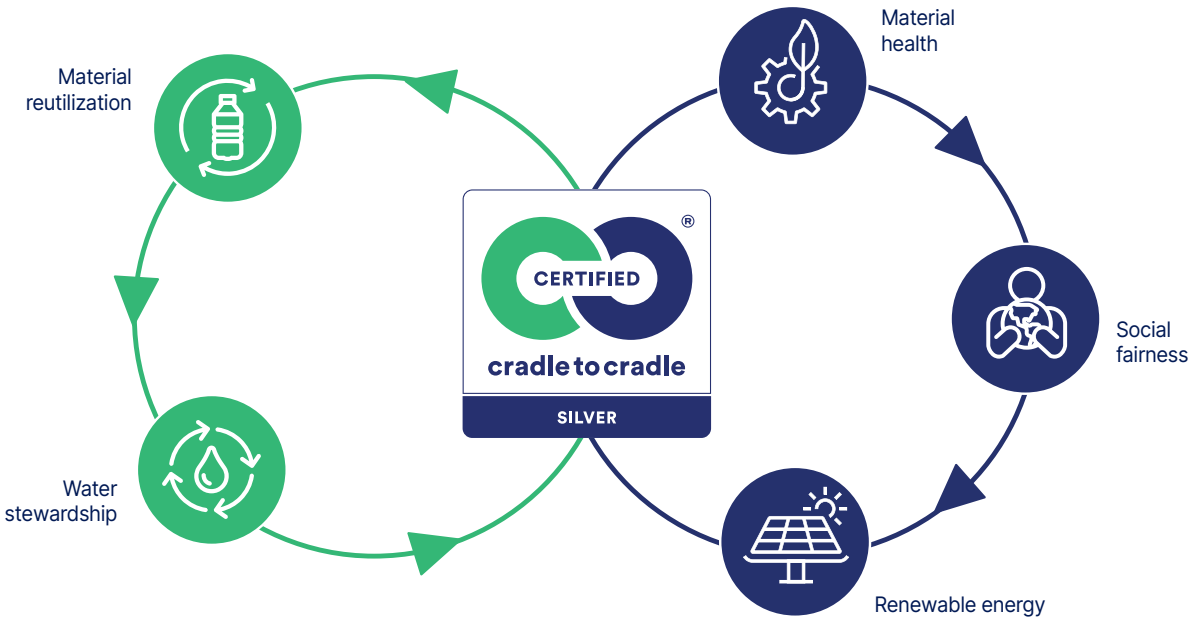

Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.



⁽¹⁾ Marmorette, Colorette, Uni Walton, Linodur, Marmorette Acoustic 15dB, Lino Art. / Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.

Circular economy

DLW Linoleum products are developed according to a Life cycle analysis (LCA) methodology:

- To assess the existing product impact on the environment through all stages of its life cycle.
- To develop new products specifically designed to reduce their environmental impact.



Carbon neutral*



Our CO₂ emissions are neutral during the first stages of the product life cycle, from the growing of raw materials to the end of the production process.



All the details can be found in our Environmental Product Declaration, which has been third part certified (EVEA laboratory) according to the guidelines of international certification body (UL).

* From Cradle to Gate: includes raw materials and manufacturing process (A1-A3 stages of EPD)

100 % recyclable



All Gerflor floorings are 100% recyclable and eligible to **Gerflor Second Life collection and recycling program**. Free collection of installation waste is available in 10 countries.

Eco Labels

Quality



Life cycle analysis



Indoor air quality



Protective by Nature

New Solvent-free surface protection developed exclusively for Linoleum.
Extremely hard wearing due to triple laser uv cross-linking



Indoor Air Quality

- Very low VOC emissions
TVOC < 10microgram/m³ after 28 days
(ISO 16516)
- Certified according to the most
demanding standards



Natural Design

- Mat effect



LPX / PUR / others...



Easy to Clean


- Dirt and stain barrier
- Cost effective maintenance
- Easy cleaning with a mop or any modern cleaning equipment

Detailed cleaning protocol available on www.gerfor.com



Standard Linoleum

Neocare™

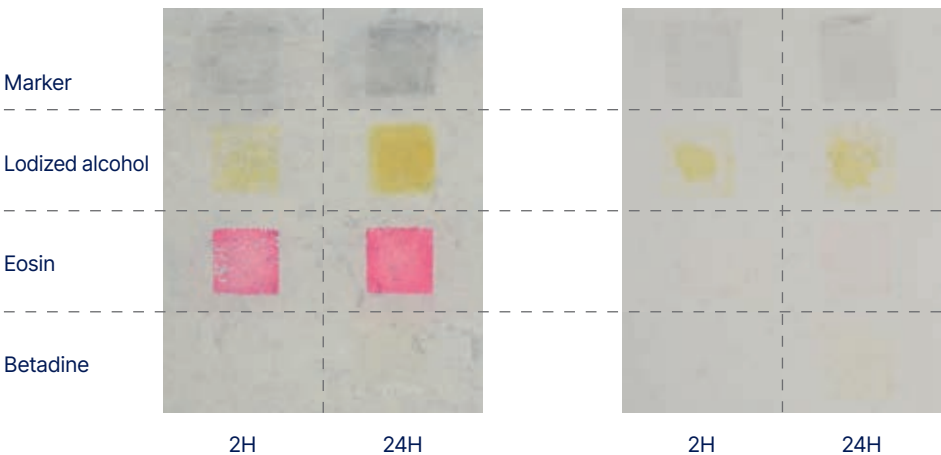

Hygiene

DLW Linoleum floorings contribute to lower the microbe load (bacteria, virus, ...)
and to minimise the risk of a contamination chain.

- Excellent resistance against disinfection chemicals
- Antiviral and antibacterial activity

AntiBacterial Surfaces

Tests conducted by a third part lab (Isega) according to ISO 22196 / JIS Z 2801 standard,
prove that DLW Linoleum floorings with Neocare™ surface treatment have antibacterial
activity against E.coli - S.aureus - MRSA: our surfaces **inhibit growth of bacteria by 99,99%
after 24h**


AntiViral Surfaces

Tests conducted by a third part lab (Virhealth) according to ISO 21702 standard, prove that
DLW Linoleum floorings with Neocare™ have antiviral activity against Human Coronaviruses:
our surfaces **reduce the number of virus by 98.65% after 5h.**



Durable

- No sealing and waxing needed
- Higher scratch resistance
- Easy to repair: in case of heavily damaged
flooring, DLW linoleum can be easily
repaired using the spray buffing method
(red disk)

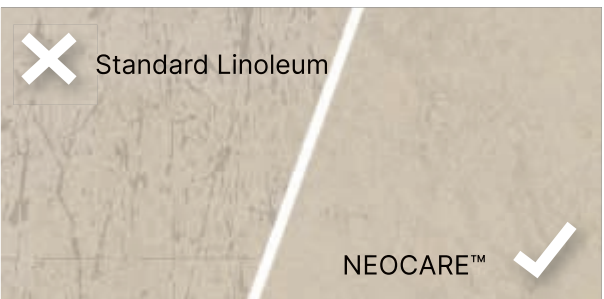

Waxing

Neocare™ is a high performing surface
treatment protecting against dirt, stains and
scratches and does not require any sealing
& waxing throughout the life of the product.
Waxing remains an option.




Uni Walton
0081 Nickel Grey

The most complete offer


Floors

Compact Linoleum
2MM / 2.5MM / 3.2MM




Marmorette 2.5mm
available in R10 & Bfl-s1

Acoustic Linoleum
4MM
Acoustic 15dB / Acoustic Plus 19dB




• Customized colours




On Demand

Technic Linoleum

High mechanical traffic
4MM



**Dissipative Linoleum
for ESD Area**
2.5MM



$10^6 \leq R \leq 10^8$

Sport Linoleum

3.2MM / 4MM
More information in sport brochure



Finishes



Welding rods

Camouflage



Marmorette & Linodur
Camouflage welding rod:
invisible joints.

Welding rod matching table available on: gerflor.com

Uni



**Colorette, Uni
Walton
& Lino Art**
Uni welding rod:
a large palett of
colors.



Handrails



Wall
Coverings
& Protections



Entrance
mats



Skirtings
& Profiles



Marmorette
0056 Foggy Blue

Compact Linoleum




0155 Smoked Pearl
2.5mm
NCS: 2005-Y90R / LRV: 44.6



0056 Foggy Blue
2.5mm / 3.2mm
NCS: 4005-Y50R / LRV: 31.8



0055 Ash Grey
2.0mm / 2.5mm / 3.2mm
NCS: 3502-B / LRV: 39.0




0153 Greystone Grey
2.5mm 
NCS: 4502-Y / LRV: 29.5



0053 Ice Grey
2.0mm / 2.5mm / 3.2mm    
NCS: 4000-N / LRV: 31.2



0050 Quartz Grey
2.0mm / 2.5mm / 3.2mm
NCS: 5502-R / LRV: 20.7

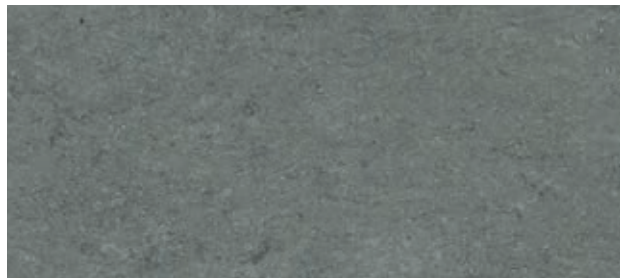


0054 Concrete Patty
2.5mm
NCS: 5500-N / LRV: 20.5



0059 Plumb Grey
2.0mm / 2.5mm / 3.2mm    
NCS: 7005-R50B / LRV: 11.3



0096 Midnight Grey
2.5mm 
NCS: 8000-N / LRV: 7.3

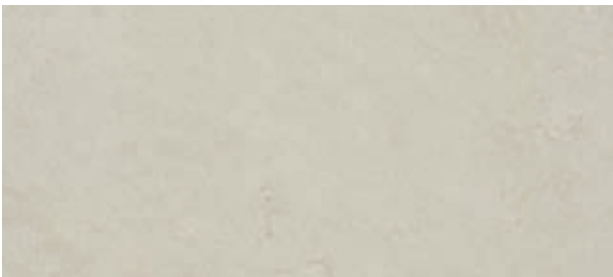

0252 Light Grey
2.5mm
NCS: 2002-Y / LRV: 49.8



0045 Sand Beige    
2.0mm / 2.5mm
NCS: 2005-Y50R / LRV: 53.2



0146 Beeswax Beige
2.5mm
NCS: 3010-Y50R / LRV: 41.0



0091 Shiitake Mushroom
2.5mm
NCS: 2010-Y80R / LRV: 41.6




0166 Clay
2.5mm
NCS: 4005-Y20R / LRV: 28.4




0106 Hazelnut Shake
2.5mm
NCS: 4010-Y50R / LRV: 26.6



0003 Dark Brown
2.5mm
NCS: 5010-Y50R / LRV: 23.0




0090 Soapstone
2.5mm
NCS: 4010-Y70R / LRV: 28.2



0158 Tabac Grey
2.5mm 
NCS: 6502-R / LRV: 14.8



0089 Peacan Pie
2.5mm
NCS: 6010-Y70R / LRV: 15.2




0092 Beach
2.5mm
NCS: 3010-Y30R / LRV: 38.6



0164 Milk Coffee
2.5mm
NCS: 5010-Y50R / LRV: 18.9



0160 Industrial Grey
2.0mm / 2.5mm
NCS: 7502-R / LRV: 10.3



0108 Mokka Brown
2.5mm
NCS: 8005-Y80R / LRV: 6.8



0042 Shortcrust
2.5mm
NCS: 3020-Y30R / LRV: 31.3

 Acoustic 15dB in stock  Acoustic Plus 19dB in stock  R10: in stock  Bfl-s1: in stock

All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer. All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm



0145 Banana White
2.5mm
NCS: 1510-Y30R / LRV: 60.4



0098 Desert Beige A
2.5mm
NCS: 2020-Y40R / LRV: 49.9



0072 Golden Yellow
2.5mm
NCS: 2040-Y20R / LRV: 41.0




0251 Cream
2.5mm
NCS: 1505-Y10R / LRV: 52.9



0040 Light Sahara A+
2.0mm / 2.5mm
NCS: 1515-Y30R / LRV: 52.7



0172 Papaya Orange
2.5mm
NCS: 1080-Y20R / LRV: 33.1



0253 Pebble Grey
2.5mm
NCS: 3005-Y20R / LRV: 44.7




0076 Pale Yellow
2.5mm
NCS: 2030-Y10R / LRV: 49.6



0173 Melon Orange
2.5mm
NCS: 2040-Y30R / LRV: 38.6



0243 Marble Beige
2.5mm
NCS: 2010-Y30R / LRV: 48.8

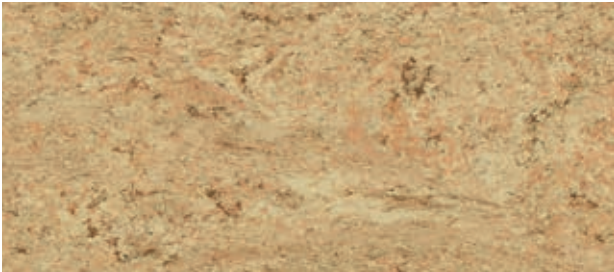

0070 Rocky Brown A+ R10 Bfl
2.0mm / 2.5mm / 3.2mm
NCS: 2020-Y40R / LRV: 40.2



0073 Spicy Orange A+
2.5mm
NCS: 3040-Y50R / LRV: 24.7




0211 Pink
2.5mm
NCS: 1030-R / LRV: 42.1



0075 Light Aurora
2.5mm
NCS: 2030-Y60R / LRV: 40.2



0119 Terracotta
2.5mm
NCS: 3060-Y60 / LRV: 18.1



0019 Sunset Orange A
2.5mm
NCS: 2040-Y70R / LRV: 27.3



0117 Mandarin Orange
2.5mm
NCS: 2070-Y60R / LRV: 18.8




0118 Chili Red
2.5mm
NCS: 2070-Y90R / LRV: 12.5



0018 Lobster Red
2.5mm
NCS: 3060-R / LRV: 10.6

A Acoustic 15dB in stock A+ Acoustic Plus 19dB in stock R10 R10: in stock Bfl Bfl-s1: in stock

All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer.
All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm

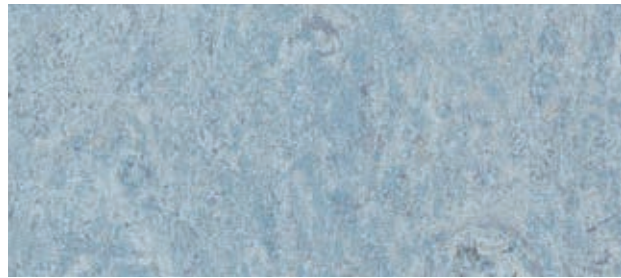


0121 Blue Eyes
2.5mm
NCS: 3010-R80B / LRV: 39.0




0122 Fluffy Blue
2.5mm
NCS: 4030-B / LRV: 21.6




0026 Sky Blue
2.5mm
NCS: 4030-R90B / LRV: 19.7




0023 Dusty Blue    
2.0mm / 2.5mm / 3.2mm
NCS: 3020-R90B / LRV: 30.0




0049 Royal Blue
2.5mm / 3.2mm
NCS: 5020-R70B / LRV: 17.8

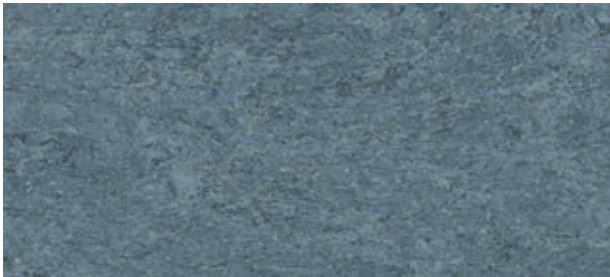


0022 Autumn Blue 
2.5mm / 3.2mm
NCS: 5010-R90B / LRV: 20.6



0224 Mystery Blue
2.5mm
NCS: 6020-R90B / LRV: 13.0




0149 Dark Blue
2.5mm
NCS: 8010-R70B / LRV: 7.2




0148 Ink Blue
2.5mm
NCS: 6020-R70B / LRV: 10.8




0129 Curacao Petrol
2.5mm
NCS: 4040-B60G / LRV: 16.8





0128 Violet
2.5mm
NCS: 4030-R60B / LRV: 13.8




0028 Dive
2.5mm
NCS: 6020-R80B / LRV: 9.4




0136 Turquoise Bay
2.5mm
NCS: 6030-B10G / LRV: 9.0

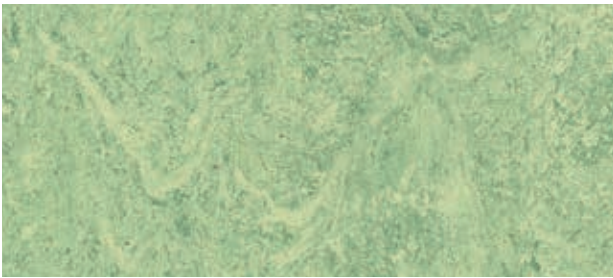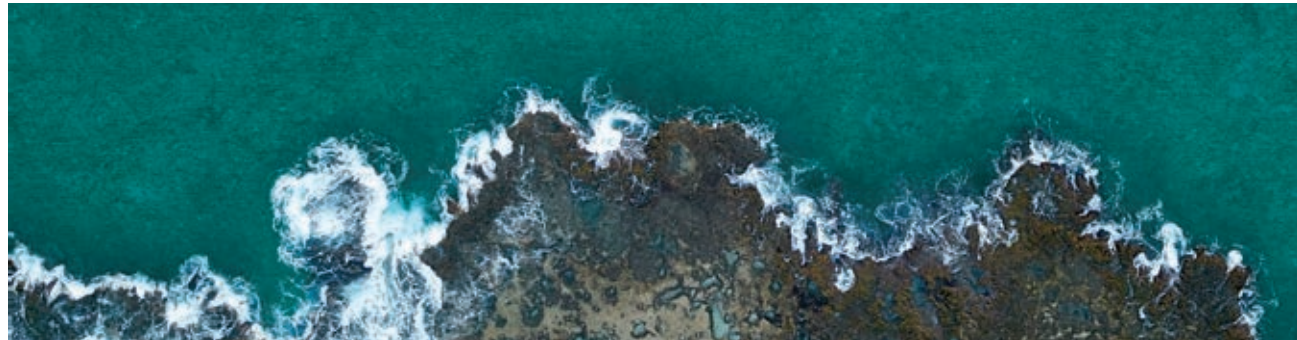

0130 Antique Green 
2.5mm
NCS: 2020-G50Y / LRV: 45.5

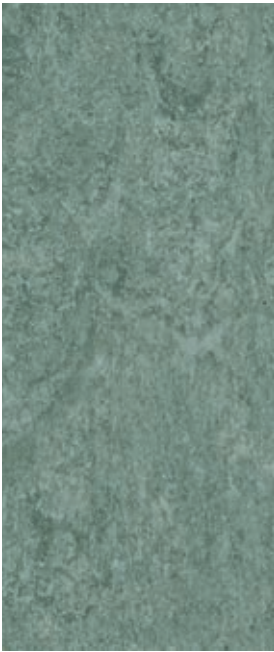

0099 Grey Turquoise
2.5mm
NCS: 4010-B70G / LRV: 27.0



0043 Leaf Green
2.5mm
NCS: 3020-G10Y / LRV: 31.6



0100 Frog Green
2.5mm
NCS: 3030-G40Y / LRV: 31.4



0132 Lime Green
2.5mm
NCS: 2050-G60Y / LRV: 38.1



0083 Jungle
2.5mm
NCS: 6010-G50Y / LRV: 14.9




0138 Khaki
2.5mm
NCS: 5020-G90Y / LRV: 19.9




 Acoustic 15dB in stock  Acoustic Plus 19dB in stock  R10: in stock  Bfl-s1: in stock

All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer. All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm



0123 Poppy Blue
NCS: 1560-R90B / LRV: 21.9



0004 Bluebird
NCS: 4040-R80B / LRV: 18.6



0132 Spicy Green 
NCS: 1060-G50 / LRV: 44.1



0006 Vivid Green
NCS: 3040-G20Y / LRV: 24.9



0080 Elephant Grey 
NCS: 6502-B / LRV: 13.5




0058 Aluminium Grey
NCS: 3502-R / LRV: 36.6



0052 Oxyd Grey 
NCS: 2502-Y / LRV: 47.0



0059 Stone Grey 
NCS: 5500-N / LRV: 22.2



0081 Private Black
NCS: 8502-B / LRV: 7.3




0001 Banana Yellow 
NCS: 1070-Y / LRV: 45.7



0071 Straw Beige
NCS: 2020-Y30R / LRV: 46.3



0171 Sunrise Orange
NCS: 1070-Y30R / LRV: 40.7



0073 Sand Yellow
NCS: 2040-Y30R / LRV: 44.8



0170 Kumquat Orange
NCS: 1070-Y60R / LRV: 26.9



0016 Deep Orange
NCS: 2050-Y60R / LRV: 27.7



0118 Power Red
NCS: 1070-Y90R / LRV: 18.9




0110 Cadillac Pink
NCS: 2050-R30B / LRV: 23.9



0012 Light Beige 
NCS: 3010-Y20R / LRV: 40.2




0043 Light Mud
NCS: 5010-Y30R / LRV: 25.6

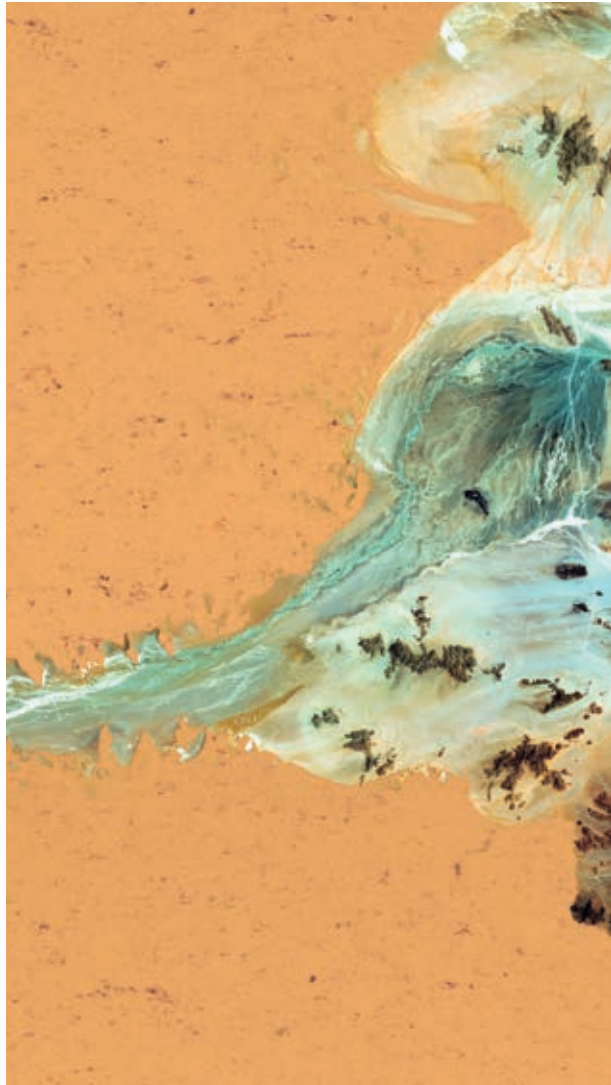




0059 Frost Grey
NCS: 1502-Y / LRV: 59.6

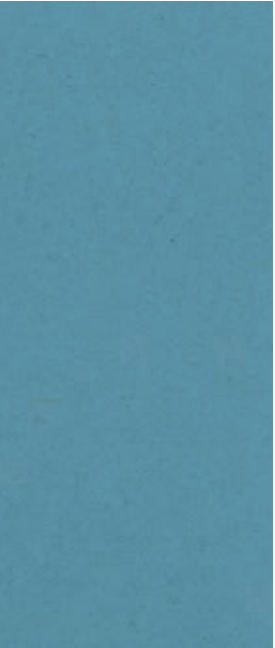

0095 Spring Blue
NCS: 3030-B / LRV: 29.1



0081 Nickel Grey
NCS: 3502-B / LRV: 31.5



0100 Ocean Blue
NCS: 5040-R80B / LRV: 8.8



0062 Mediterranean Orange
NCS: 3060-Y60R / LRV: 16.4



0088 Chestnut
NCS: 5040-Y80R / LRV: 9.1



0043 Neutral Beige
NCS: 1515-Y30R / LRV: 51.1



0085 Warm Concrete Grey
NCS: 3005-Y20R / LRV: 35.7




0090 Olive
NCS: 4020-G90Y / LRV: 22.3



0082 Broken Grey
NCS: 5502-R / LRV: 20.7



0010 Pompeii Red
NCS: 2070-Y90R / LRV: 14.1

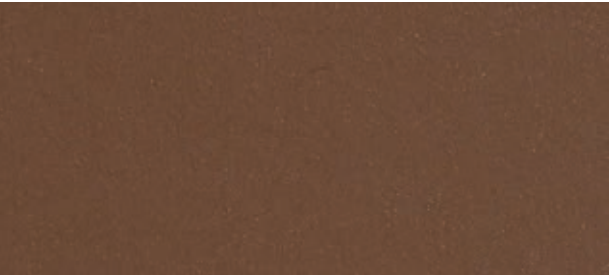

0060 Deep Brown
NCS: 7020-Y60R / LRV: 9.2




0058 Clay Grey
NCS: 6005-Y20R / LRV: 15.8



0035 Racing Green
NCS: 8005-B80G / LRV: 7.6



0083 Architects Grey
NCS: 7500-N / LRV: 10.9



0080 Black
NCS: 8505-R80B / LRV: 4.8



0552 Silver Grey
NCS: 3005-G50Y / LRV: 41.8



0567 Shining Green
NCS: 4005-G80Y / LRV: 35.2



0566 Shining Blue
NCS: 5005-R80B / LRV: 21.8



0565 Graphite Grey
NCS: 6005-R50B / LRV: 15.3



0562 Titan Grey
NCS: 3000-N / LRV: 41.2



0563 Zinc Grey
NCS: 4502-R / LRV: 27.4



0555 Flashy Street Grey
NCS: 4005-Y20R / LRV: 32.1



0550 Beton Soft Grey
NCS: 4005-Y50R / LRV: 31.7



0556 Mud Grey
NCS: 3010-Y20R / LRV: 33.7



0557 Urban Grey
NCS: 4010-Y30R / LRV: 30.5




0558 Screed Grey
NCS: LRV: 5010-Y10R / 22.8



0564 Natural Stone
NCS: 1505-Y20R / LRV: 59.1



0554 Concrete Grey
NCS: 5005-Y50R / LRV: 25.2



0551 Flashy Asphalt Grey
NCS: 4502-Y / LRV: 24.9



0559 Vintage Grey
NCS: 5005-Y20R / LRV: 24.9




0560 Bold Grey
NCS: 6005-Y50R / LRV: 16.5



0553 Dark Concrete Grey
NCS: 6005-Y50R / LRV: 16.1



0561 Pitch Black
NCS: 8000-N / LRV: 7.1

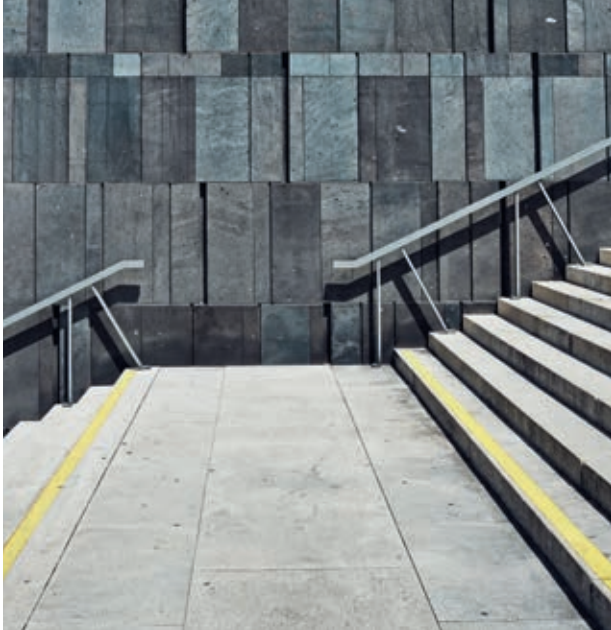


Lino Art Metallic




NEOCARE™




0078 Petrol Blue
NCS: 7010-R70B / LRV: 11.2

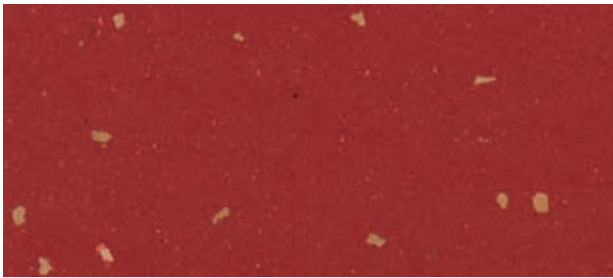


0076 Salsa
NCS: 4050-Y90R / LRV: 10.0




0015 Glaring Red
NCS: 2070-R / LRV: 11.5

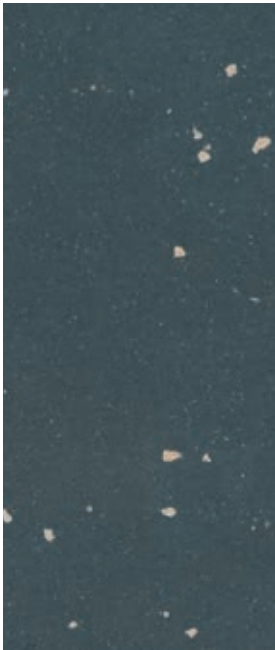


0070 Cool Grey
NCS: 7005-B20G / LRV: 11.1



0072 Olive Green
NCS: 7010-G90Y / LRV: 13.5




0068 Bottle Green
NCS: 8005-B80G / LRV: 7.2

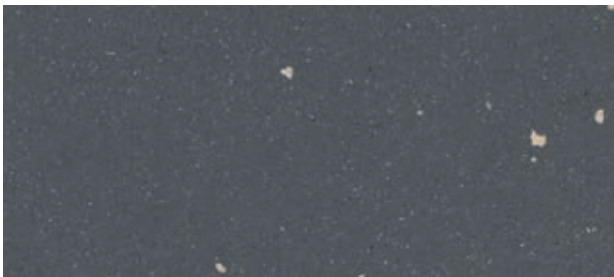

0083 Alumino Light Grey
NCS: 7500-N / LRV: 11.0



0080 Firmament Black
NCS: 8500-N / LRV: 5.0



0074 Burned Siena
NCS: 8005-Y80R / LRV: 6.7




Lino Art Star



NEOCARE™




0075 Apricot
NCS: 2050-Y50R / LRV: 29.0




0092 Stratiatella
NCS: 4005-Y20R / LRV: 35.4




0090 Smooth Grey
NCS: 6005-Y50R / LRV: 17.5

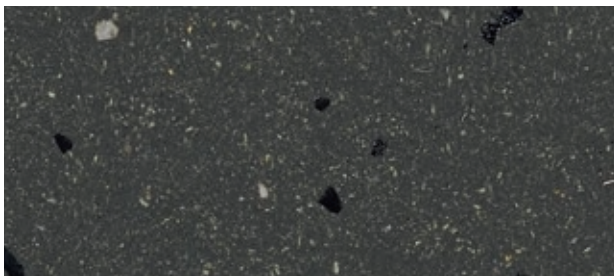


0085 Mid Grey
NCS: 8000-N / LRV: 8.2



0001 Lemon Yellow
NCS: 1070-Y / LRV: 47.9

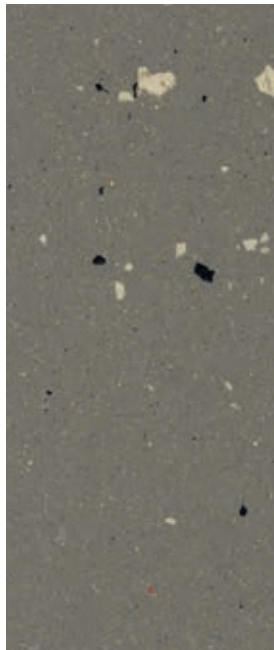


0059 Dusty Grey
NCS: 5005-Y50R / LRV: 20.9



0030 Apple Green
NCS: 2050-G40Y / LRV: 35.0



0023 Blue Turquoise
NCS: 5030-B50G / LRV: 16.0



0020 Aqua Turquoise
NCS: 2040-B / LRV: 33.9



0025 Clear Blue
NCS: 5030-R70B / LRV: 13.4




0094 Bubble Gum
NCS: 1040-R / LRV: 42.5



0024 Magma
NCS: 2005-Y60R / LRV: 47.8



0012 Waterfall
NCS: 2002-Y50R / LRV: 50.3



0005 Bamboo
NCS: 2005-Y20R / LRV: 50.6



0030 Rain
NCS: 2002-Y50R / LRV: 43.3




0048 Travertin
NCS: 2010-Y30R / LRV: 55.0



0036 Shaal Concrete
NCS: 2002-Y50R / LRV: 52.6




0050 Grey Line
NCS: 5000-N / LRV: 26.0

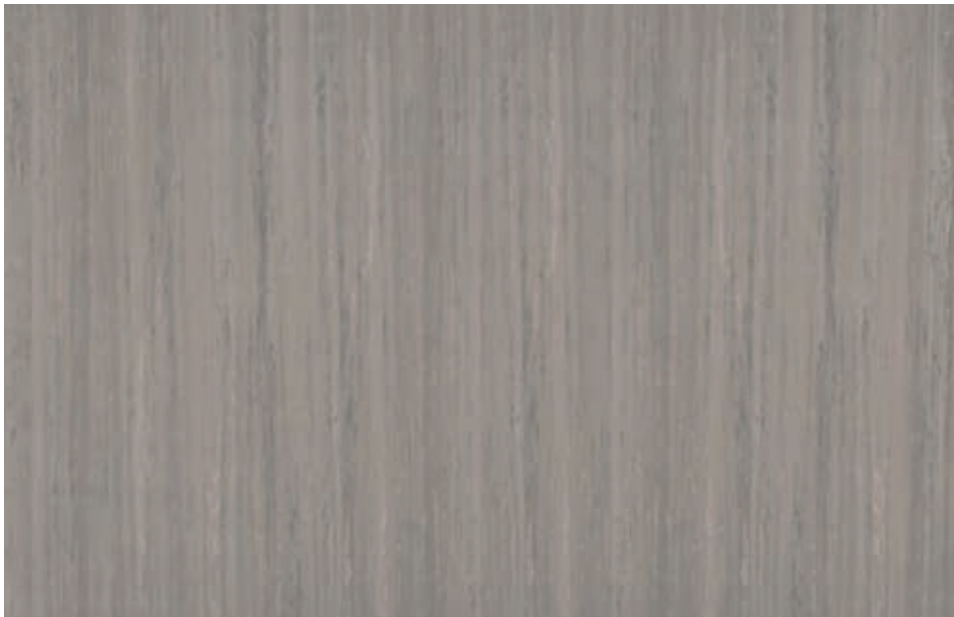


0043 Pulp Greige
NCS: 5005-Y50R» / LRV: 25.4



0083 Light Grey
NCS: 7500-N / LRV: 10.4



0162 Bark
NCS: 6010-Y50R / LRV: 16.0

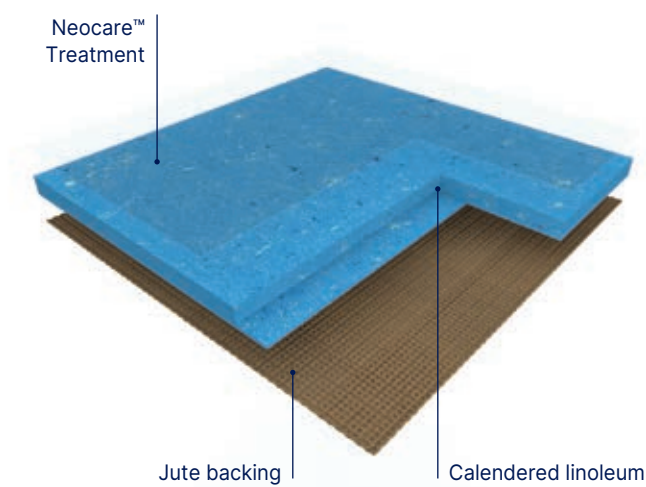

Colorette is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



Marmorette is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400g/sqm in 2.0mm, 2900g/sqm in 2.5mm and 3800g/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



Uni Walton is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



Lino Art is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a striated design (FLOW), a scattered metallic design (METALLIC), a scattered colour chips design (STAR), a concrete design (URBAN) and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

Colorette, Marmorette, Uni Walton, Lino Art
The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. It is Floorscore®, M1 and Blue Angel certified.
The floorings are 100% recyclable, are composed of up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.
Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Silver. They are Environmental Performance Declaration (EPD) certified by an external laboratory indicating carbon neutrality during the first stages of their life cycle ("from cradle to gate").
The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible.
They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.

Compact Linoleum

NEOCARE™

			Marmorette	Colorette / Uni Walton		Lino Art Urban / Flow / Metallic / Star
Description			R10*	Bfl-s1*		
Total thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5	2.5
Backing	-	-	Jute fabric		Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	2400 / 2900 / 3800	2900	2900	2900
Width of sheet	EN ISO 24341	cm	200		200	200
Length of sheet	EN ISO 24341	m	20-31		20-31	20-31
Classification						
Norm/Product specification	-	-	EN ISO 24011		EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43 23 / 32 / 41 in 2.0mm		23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1**	Bfl-s1*	Cfl-s1**	Cfl-s1**
Slip resistance	EN 16165 App B (DIN 51130)	class	R9	R10*	R9	R9
Impact sound insulation	EN ISO 717-2	dB	3dB / 5dB / 6dB	5dB	5dB	5dB
Performances						
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105 - B02	Rating	≥ 6		≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200		> 200	> 200
Static electrical propensity	EN 1815	kV	≤ 2		≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK		OK	OK
Flexibility	ISO 24344	mm	Ø 40 (2.5 mm)		Ø 40	Ø 40
Flexibility (average measured value)	ISO 24344	mm	Ø 30		Ø 30	Ø 30
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018	0.015	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17		0.17	0.17
Surface treatment	-	-	Neocare™		Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	-	Excellent		Excellent	Excellent
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24 h***	EN ISO 22196 / JIS Z 2801	-	> 99.99 % inhibits growth		> 99.99 % inhibits growth	> 99.99 % inhibits growth
Anti-viral activity (Human coronavirus) after 5 h***	ISO 21702	-	> 98.65 % virucidal activity		> 98.65 % virucidal activity	> 98.65 % virucidal activity
Indoor Air Quality						
TVOC after 28 days	EN 16516	microgram/m³	< 10		< 10	< 10
Circular economy						
Certification	Cradle to Cradle	-	Silver	Silver	-	Silver
CE marking						
	EN 14041: 2004 AC: 2006	-				

* Only in colours: 0053 / 0059 / 0045 / 0070 / 0023
** Glued according to certificate. / DOP numbers available from your local branch.
*** The implementation of an effective cleaning method is the best defence against infection.
 Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

Colorette
0171 Sunrise Orange

Acoustic Linoleum

Marmorette Acoustic





0059 Plumb Grey
NCS: 7005-R50B / LRV: 11.3




0053 Ice Grey
NCS: 4000-N / LRV: 31.2



0098 Desert Beige
NCS: 2020-Y40R / LRV: 49.9



0045 Sand Beige
NCS: 2005-Y50R / LRV: 53.2

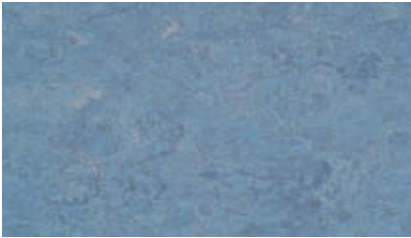

0023 Dusty Blue
NCS: 3020-R90B / LRV: 30.0



0019 Sunset Orange
NCS: 2040-Y70R / LRV: 27.3

Marmorette Acoustic Plus






0096 Midnight Grey
NCS: 8000-N / LRV: 7.3



0059 Plumb Grey
NCS: 7005-R50B / LRV: 11.3



0158 Tabac Grey
NCS: 6502-R / LRV: 14.8



0053 Ice Grey
NCS: 4000-N / LRV: 31.2



0153 Greystone Grey
NCS: 4502-Y / LRV: 29.5




0070 Rocky Brown
NCS: 2020-Y40R / LRV: 40.2



0040 Light Sahara
NCS: 1515-Y30R / LRV: 52.7




0045 Sand Beige
NCS: 2005-Y50R / LRV: 53.2



0022 Autumn Blue
NCS: 5010-R90B / LRV: 20.6



0023 Dusty Blue
NCS: 3020-R90B / LRV: 30.0




0130 Antique Green
NCS: 2020-G50Y / LRV: 45.5




0073 Spicy Orange
NCS: 3040-Y50R / LRV: 24.7

Colorette Acoustic Plus






0080 Elephant Grey
NCS: 6502-B / LRV: 13.5



0059 Stone Grey
NCS: 5500-N / LRV: 22.2



0052 Oxid Grey
NCS: 2502-Y / LRV: 47.0



0012 Light Beige
NCS: 3010-Y20R / LRV: 40.2




0001 Banana Yellow
NCS: 1070-Y / LRV: 45.7




0132 Spicy Green
NCS: 1060-G50 / LRV: 44.1

Uni Walton Acoustic Plus






0083 Architects Grey
NCS: 7500-N / LRV: 10.9



0058 Clay Grey
NCS: 6005-Y20R / LRV: 15.8



0085 Warm Concrete Grey
NCS: 3005-Y20R / LRV: 35.7



0095 Spring Blue
NCS: 3030-B / LRV: 29.1




0090 Olive
NCS: 4020-G90Y / LRV: 22.3




0010 Pompeji Red
NCS: 2070-Y90R / LRV: 14.1

Lino Art Urban Acoustic Plus






0561 Pitch Black
NCS: 8000-N / LRV: 7.1



0553 Dark Concrete Grey
NCS: 6005-Y50R / LRV: 16.1




0554 Concrete Grey
NCS: 5005-Y50R / LRV: 25.2



0558 Screed Grey
NCS: LRV: 5010-Y10R / 22.8



0556 Mud Grey
NCS: 3010-Y20R / LRV: 33.7




0564 Natural Stone
NCS: 1505-Y20R / LRV: 59.1

All other colors can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer.
All other colors can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm

Acoustic Linoleum

NEOCARE™

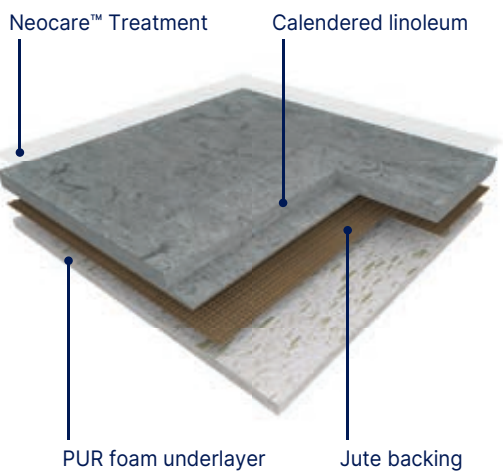


Marmorette Acoustic Plus is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

Colorette Acoustic Plus is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a speckled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

Uni walton Acoustic Plus is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a uni design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

Lino Art Urban Acoustic Plus is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a concrete design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

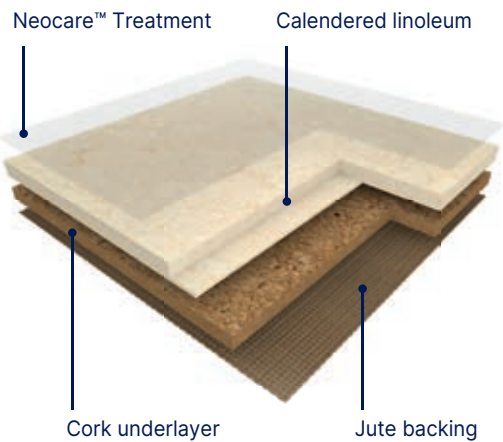

Marmorette Acoustic is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3900g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 2mm cork underlayer, ensuring up to 15dB impact sound reduction.

Acoustic Linoleum
The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.
The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. They are Floorscore®, M1 and Blue Angel certified. The floorings are 100% recyclable, are composed of up to 44% recycled content (Acoustic Plus), 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.
Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Bronze (Marmorette Acoustic Plus, Colorette Acoustic Plus) and Cradle to Cradle certified™ Silver (Marmorette Acoustic). Their Environmental Performance Declaration (EPD) certified by an external laboratory, indicate carbon neutrality during the first stages of their life cycle ("from cradle to gate").
The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.



Korkment: cork acoustic underlayer

2.0mm underlayer (weight 1.2kg/sqm),
15 dB impact sound reduction

Ref R1020102

Marmorette Acoustic Plus 19db
Colorette Acoustic Plus 19db
Uni Walton Acoustic Plus 19db
Lino Art Urban Acoustic Plus 19db

Marmorette Acoustic
15db

DESCRIPTION				
Total thickness	EN ISO 24346	mm	4.0	4.0
Backing	-	-	Foam backing	Cork and jute fabric
Thickness of cork / foam backing	EN ISO 24340	mm	1.5	2.0
Weight	EN ISO 23997	g/sqm	3500	3900
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	m	20-31***	20-31

CLASSIFICATION				
Norm / Product specification	-	-	EN 686	EN 687
European classification	EN ISO 10874	class	23 / 33 / 41	23 / 33 / 41
Fire rating	EN 13501-1	class	Cfl-s1*	Cfl-s1*
Slip resistance	EN 16165 App B (DIN 51130)	class	R9	R9
Impact sound insulation	EN ISO 717-2	dB	19dB	15dB

PERFORMANCES				
Residual indentation	EN ISO 24343-1	mm	≤ 0.30	≤ 0.40
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200	> 200
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK	OK
Flexibility	ISO 24344	mm	Ø 40	Ø 60
Flexibility (Average measured value)	ISO 24344	mm	Ø 35	Ø 30
Thermal resistance	EN 12667	sqm,K/W	0.044	0.04
Thermal conductivity	EN ISO 10456	W/(m.K)	0.0937	0.17
Surface treatment	-	-	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	Excellent	
Anti-bacterial activity (E. coli - S. aureus - MRSA)** after 24 hours	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5h*	ISO 21702	-	> 98.65 % virucidal activity	> 98.65 % virucidal activity

INDOOR AIR QUALITY				
TVOC after 28 days	EN 16516	microgram/m³	< 10	< 10

CIRCULAR ECONOMY				
Certification	Cradle to Cradle	-	Bronze	Silver

CE MARKING				
CE	EN 14041: 2004 AC: 2006	-		

* Glued according to certificate.
** The implementation of an effective cleaning method is the best defense against infection.
*** Roll dimension 1.96m x 18-29lm for single roll production
DOP numbers available from your local branch.

⚠ Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.



Technic Linoleum


Linodur
1020 Spring Blue

Linodur    


High mechanical traffic resistance




1056 Marble Grey
NCS: 4000N / LRV: 35.2

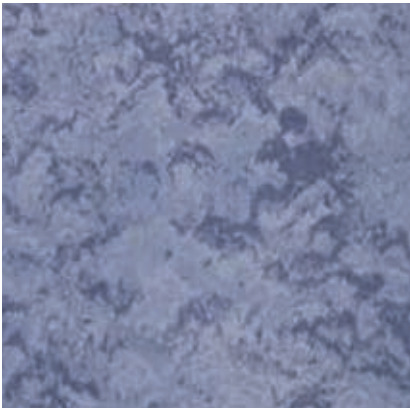

1020 Spring Blue
NCS: 4020-R90B / LRV: 24.1

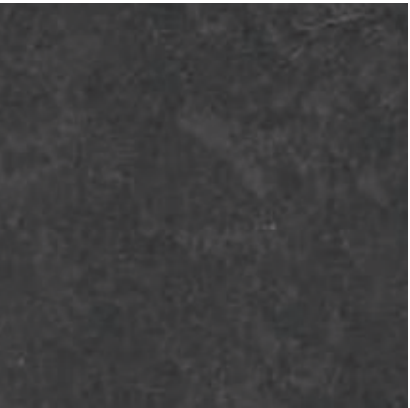


1081 Sporty Black
NCS: 7502-B / LRV: 6.7

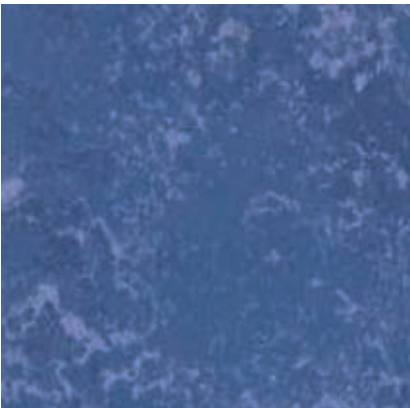

1024 Speckled Blue
NCS: 4030-R80B / LRV: 15.2




1072 Peach Orange
NCS: 2050-Y40R / LRV:30.1

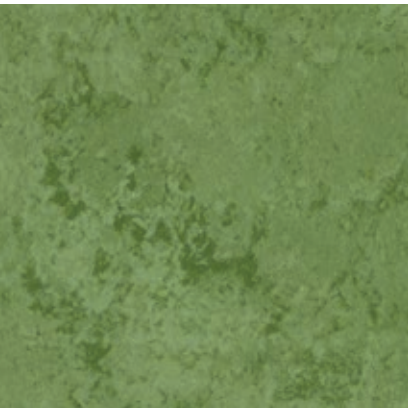

1011 Avocado Green
NCS: 2050-G30Y / LRV: 29.2

Marmorette LCH     $10^6 \leq R \leq 10^8$

Dissipative Linoleum for ESD areas

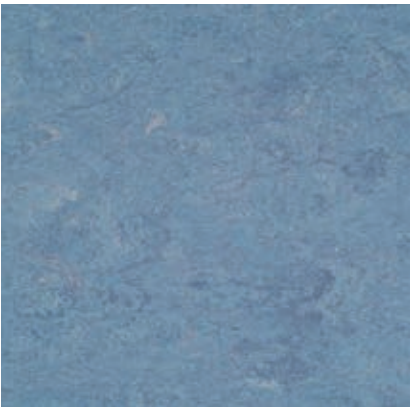


0023 Dusty Blue
NCS: 3020-R90B / LRV: 30.0



0055 Ash Grey
NCS: 3502-B / LRV: 39.0

Linodur Technic Linoleum


High mechanical traffic resistance

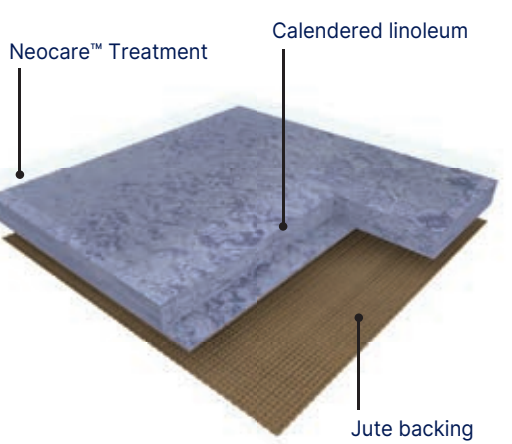

Linodur is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high pedestrian and mechanical traffic areas. Its weight is 4700g/sqm in 4.0mm. It features a discreet grain design and is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The Camouflage welding rod makes the connections between the strips invisible. It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801. The flooring is 100% recyclable, is composed of up to 32% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications. The Camouflage welding rod makes the connections between the strips invisible. It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

Marmorette LCH

Dissipative Linoleum for ESD areas

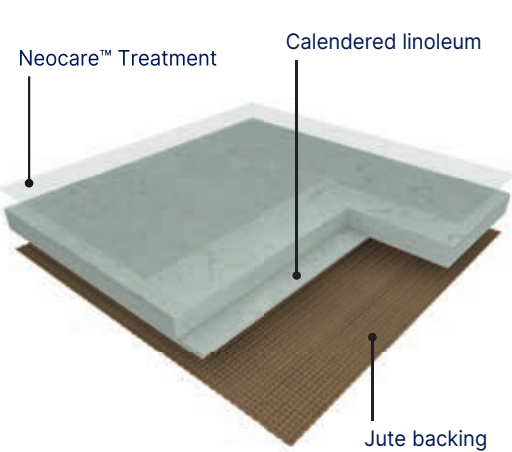

Marmorette LCH is a calendered linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its vertical resistance is $10^6 < R < 10^8 \Omega$. Its weight is 3000g/sqm in 2.5mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, is composed of up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications. The Camouflage welding rod makes the connections between the strips invisible. It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

			Linodur	Marmorette LCH
DESCRIPTION				
Total thickness	EN ISO 24346	mm	4.0	2.5
Backing	-	-	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	4700	3000
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	m	App.28	20-31
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1*	Cfl-s1*
Slip resistance	EN 16165 App B (DIN 51130)	class	R10	R9
Impact sound insulation	EN ISO 717-2	dB	8dB	3dB
PERFORMANCES				
Residual indentation	EN ISO 24343-1	mm	≤ 0.20	≤ 0.15
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Vertical resistance	EN 1081	Ohm	-	$10^6 \leq R \leq 10^8$
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.023	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17
Surface treatment	-	-	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	Excellent	
Anti-bacterial activity (E. coli - S. aureus - MRSA)** after 24 hours	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5h*	ISO 21702	-	>98,65 % virucidal activity	> 98.65 % virucidal activity
INDOOR AIR QUALITY				
TVOC after 28 days	EN 16516	microgram/m³	<50	< 10
CE MARKING				
CE	EN 14041: 2004 AC: 2006	-		

* Glued according to certificate.
** The implementation of an effective cleaning method is the best defense against infection.
DOP numbers available from your local branch.

Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

More than a floor... wall & finishes

For more details visit gerflor.com



Floor protection



REF.: 058X0001

Korkment: cork acoustic underlayer



REF.: R1020102




Welding rod



Welding rod matching table
available on: gerflor.com



Skirtings MDF

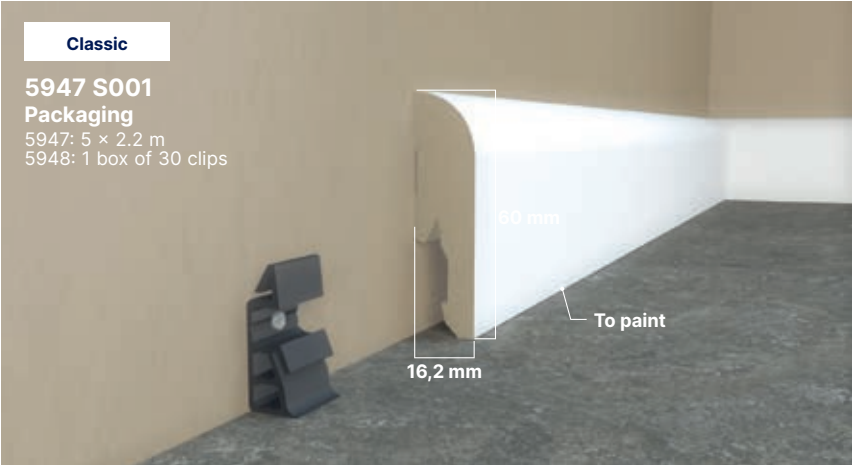


Color: White

Skirtings cove former



Color: 6512

Skirtings HSLA

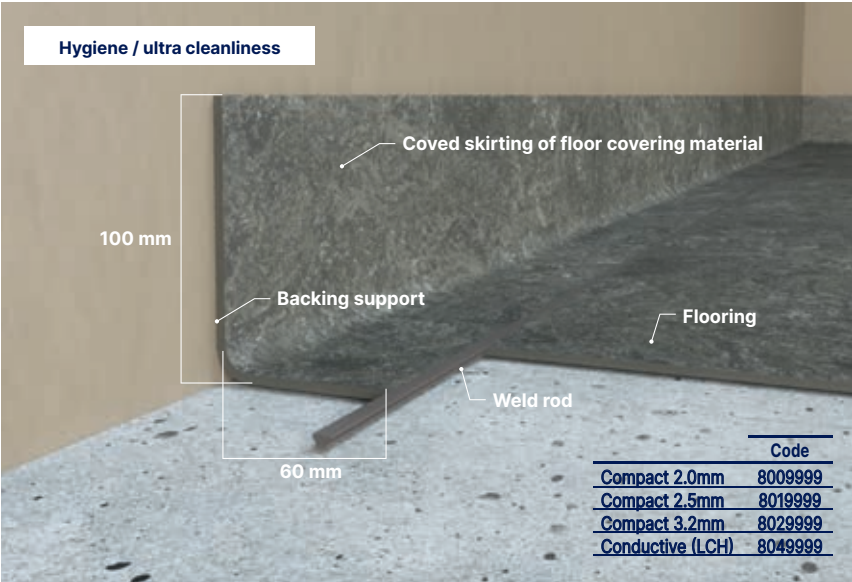

Cleaning Neocare™- treated Linoleum floors

Marmorette / Colorette
Uni Walton / Lino Art / Linodur



Damp sweeping equipment
Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips



Single disk machine



Manual washing equipment
Disposable microfibre mop or gauze



Autoscrubber



Mechanical cleaning disk
3M (or equivalent) colour disks

	Equipment used	Cleaning products	Cleaning methods
First use			
Manual or mechanical cleaning	    or  if soiled	Neutral detergent or Alkaline detergent	• Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)
Daily cleaning			
Manual cleaning	 	Neutral detergent / Disinfectant detergent ⁽¹⁾	• Damp sweeping • Manual washing with flat mop • Rinsing
OR			
Mechanical cleaning	  	Neutral detergent	• Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)
Deep cleaning			
Mechanical cleaning	   or 	Alkaline detergent	• Damp sweeping • Mechanical washing at 160-200 rpm (with water recovery)

(1) In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.

These cleaning instructions have to be adapted depending on traffic and location of the area.

In the case of **manual maintenance** and to offer you the best results in terms of hygiene and appearance, **Gerflor recommends that you use neutral and alkaline detergents with high wetting power** (complete spreading and cleaning of the entire floor surface).



Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level.

Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: www.gerflor.com



Uni Walton
0100 Ocean Blue

Lino Art Flow
0030 Rain



Lino Art Urban
0566 Shining Blue



Uni Walton
0100 Ocean Blue



Lino Art Flow
0030 Rain



Visualize your project

interiordesigner.gerflor.com



Mix & Match

Lino Art Urban
0555 Flashy Street Grey



Lino Art Flow
0024 Magma



Marmorette
0117 Mandarin Orange

The proof is in the customer experience



University of Praha,
Czech Republic




Oncology Center,
Moscow, Russia



Language School
Underhub,
Kiev, Ukraine



National Stadium,
Beijing, China

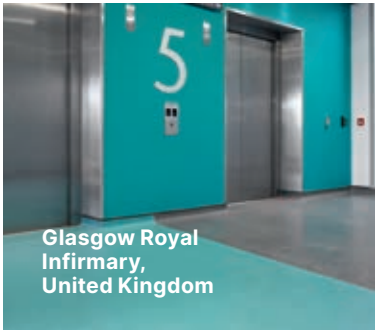

Glasgow Royal
Infirmary,
United Kingdom



Kindergarden,
Terenten, Italy

Testimonial:

"After trying DLW linoleum equipped with Neocare™, I would definitely recommend it for healthcare projects, as it meets our demanding standards in terms of cleaning and hygiene."

Anita Heidelberg, Head of Cleaning and Disinfection,
Glostrup Hospital, Denmark



Educational Center
El Chaparral,
Granada, Spain



DLW Linoleum, Creative by Nature

At Gerflor, we believe that architecture has the power to improve people's lives. Nature is our greatest source of inspiration. With the DLW Linoleum offer, we can provide architects with a collection of 159 colors, these are natural designs, that can enhance the sustainability and the creativity of their projects. Made in Germany since 1882 and Cradle to Cradle certified™ Silver, the DLW Linoleum products are made of 98% natural materials including linseed oil, wood, limestone, jute and resin. It's simply our way of connecting people closer to nature.

Mix & Match Collections

DLW Linoleum

Creative by Nature

Gerflor

DLW Lino Art

Creative by Nature

Gerflor

we care / we act Our Commitments for a Sustainable future

CARBON FOOTPRINT*

-20 % kg CO₂ equivalent/m² between 2020 and 2025

BIOSOURCED CONTENT**

10 % by 2025

RECYCLED CONTENT

30 % by 2025

ADHESIVE FREE***

35 % by 2025

ANNUAL VOLUME RECYCLED

60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution