


TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTIPURPOSE USE

Taraflex® Sport M Plus provides excellent levels of comfort and safety suited to all types of sports combined with some multipurpose activities.

- ▶ ASTM F2772 Class 3
 - ▶ Superior Indentation Resistance: Improved shock absorption without sacrificing indentation resistance
 - ▶ Absorption ball bounce: $\geq 96\%$
 - ▶ Impact Protection Index (I PI): 76%
 - ▶ Dual density foam
 - ▶ No-wax for life - ease of maintenance
 - ▶ Available with Gerflor Dry-Tex System
-
- ▶ Highest moisture tolerance: 100% RH (25 lb)
 - ▶ Up to 70% cost saving compared to third-party mitigation system
 - ▶ Full-spread adhesive installation method: no risk of mold

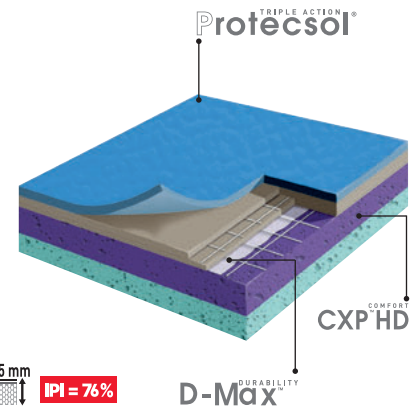

TARAFLEX® SPORT M PLUS

Description		Standards	Requirements	Wood Designs	Solid Colours
Product Description					
Compression		-	-	D-Max [®]	
Foam Backing		-	-	Double Density CXP HD+	
Total Thickness		-	-	7.5 mm [0.27"]	
Total Top Layer		-	-	2.1 mm	
Weight		-	-	4.6 kg/m² [0.95 lb/ft²]	
Roll Width		-	-	1.5 m [4' 11"]	
Roll Length		-	-	26.4 m [86' 6"]	20.5 m [67' 3"]
Sport Properties					
Shock Absortion (Safety)		ASTM F2772	Class 1	Class 3	
Vertical Deformation		ASTM F2772	≤ 3 mm [≤0.12»]	Pass	
Sliding Effect		ASTM F2772	80 - 110	Pass	
Ball Rebound		ASTM F2772	≥ 90%	≥ 96%	
Anti-Friction Burns		-	-	Protecsol [™]	
Technical Characteristics					
Static Load Resistance		ASTM F970	≤ 0.005"	Meets Requirements	
Abrasion		ASTM F510	-	Meets Requirements	
Flexibility		ASTM F137	≥ 1.5"	Meets Requirements	
Chemical & Stain Resistance		ASTM F925	-	Meets Requirements	
Resistance to Heat		ASTM F1514	ΔE≤8	Meets Requirements	
Fire Rating - Flame Spread		ASTM E648	Class 1	Meets Requirements	
Fire Rating - Flaming		ASTM E662	450 or less	Meets Requirements	
Fire Rating - Non-Flaming		ASTM E662	450 or less	Meets Requirements	
Fire Rating		CAN/ULC-S102.2	-	FSV: 185 SDV: 175	
Environment Health & Safety					
Bacterio-Static**		ISO 22196	-	Inhibits spread of infections at 99%	
Viro-Static**		ISO 21702	-	Inhibits growth of virus of 99.7% after 2 hours	
Manufacturing Plant Certifications		ISO 9001, 14001, 50001	-	Quality, Environment, Health & Safety, Energy	
Environmental Product Declaration (EPD)		LEED v4 M+R	-	Product-Specific Type III	
Material Ingredients: Health Product Declaration (HPD)		LEED v4 M+R	-	Self-Declared	
No Harmful Chemicals		European Chemicals Agency (ECHA)	-	100% REACH Compliant	
Sourcing of Raw Material: Recycled Content		Average Pre-Consumer Content	-	34%	
Indoor Air Quality		California Standard 01350	-	FloorScore® Certified	
Production Waste		In-Plant Recycling	-	100% Manufacturing Waste Recycled	
TVOC after 28 days		ISO 16000-6	-	< 100µg/m²	
Installation Method					
Full-Spread Adhesive		ASTM F2170 (F1869)	-	Gerfix TPS: ≤95% [10LB] Gerfix 196: ≤98% [15LB]	
Loose-Lay Installation with ISOLSPORT		ASTM F2170 (F1869)	-	Gerfix 196: ≤98% [15LB]	
Gerflor Dry-Tex System		ASTM F2170 (F1869)	-	Gerpur: 100% [25lbs]	
Warranty	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions				

** The best defense against the spread of infections is the implementation of an effective cleaning method.