

**457×457 mm
& New 614×614 mm**

Design Tile

The interlocking tile for fast renovation

Gerflor®

Design Tile

the interlocking tile for fast renovation



Ceramic tile look



Renovation over ceramic



Adhesive free



Sound reduction



Rolling traffic compliant*




Slip resistance




Easy cleaning

* Conditions specified
in installation guidelines

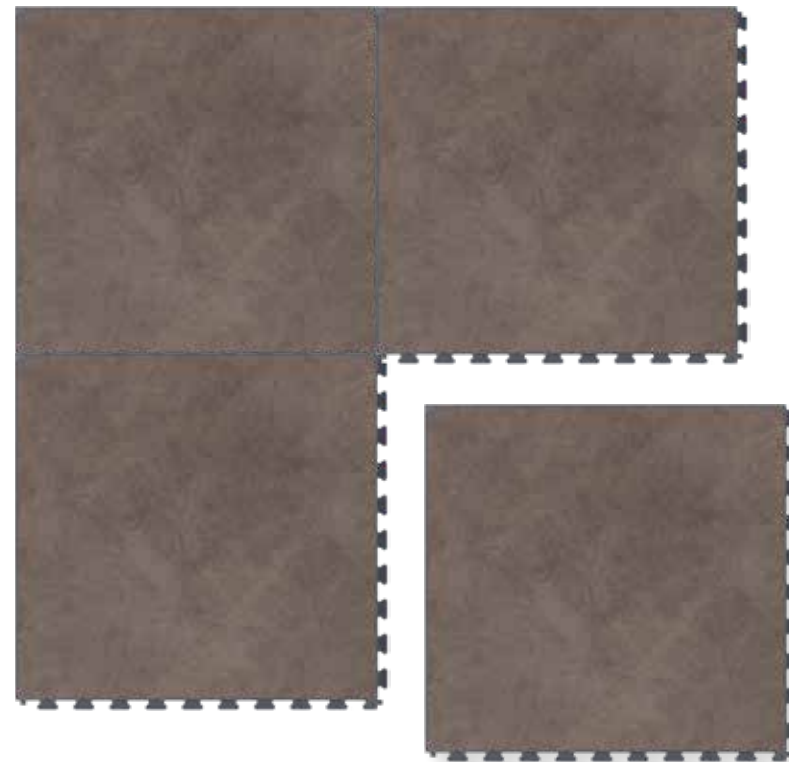

Do not forget Access, Corners, Profiles & Tools



Aluminium Ramp
Screwed - 2,5m
Code: 0663 with Insert (Black,
Light Grey, Dark Grey) Code: 4096

PVC Ramp
2m - Code: 7032



Diminishing Profile - 2m
Code: 0490



Entrance Mat
Esplanade 9000
Code: 1700



Anti Bounce Mallet
Code: 5951

Renovation solution

for high traffic applications



Restaurants



Hotels



Retail Shops



Supermarkets



Public Buildings



Schools

we **care** / we **act**



Recycling
Recyclable
Up to 80% recycled content



Indoor Air Quality
TVOC < 100 micrograms / m³
No Formaldehyde



Reach
100% REACH compliant
Phthalate Free (except recycled content)
FREE of heavy metals
FREE of solvent



1696 Acero Light
Light grey grout



1698 Marmetta Beige
Brown grout




1697 Acero Beige
Light grey grout



1698 Marmetta Beige



1695 Manhattan Cloud
Light grey grout

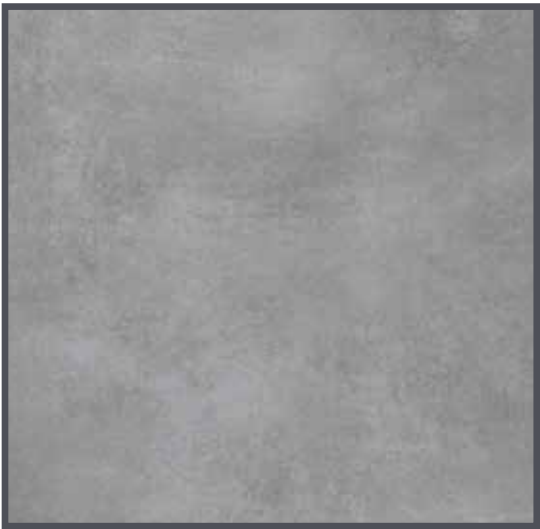

1693 Manhattan Grey
Dark grey grout



1692 Manhattan Storm
Light grey grout



1694 Manhattan Dust
Light grey grout




1699 Luberon Grey
Light grey grout



1699 Luberon Grey

Design Tile

457 × 457 mm



1550 Vintage Maple
Light grey grout



1551 Vintage Sand
Brown grout



1552 Vintage Ash
Light grey grout



1548 Limestone
Light grey grout



1555 Sandstone
Light grey grout



1544 Shalestone
Dark grey grout



1553 Terrazzo Cream
Dark grey grout



1554 Terrazzo Grey
Dark grey grout




1549 Polished Concrete
Light grey grout




1545 Clay
Dark grey grout



1546 Granite
Dark grey grout

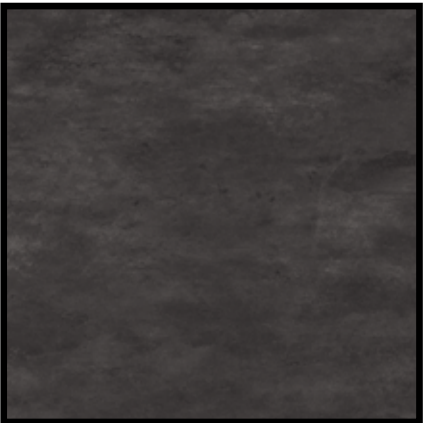

1547 Volcano
Black grout

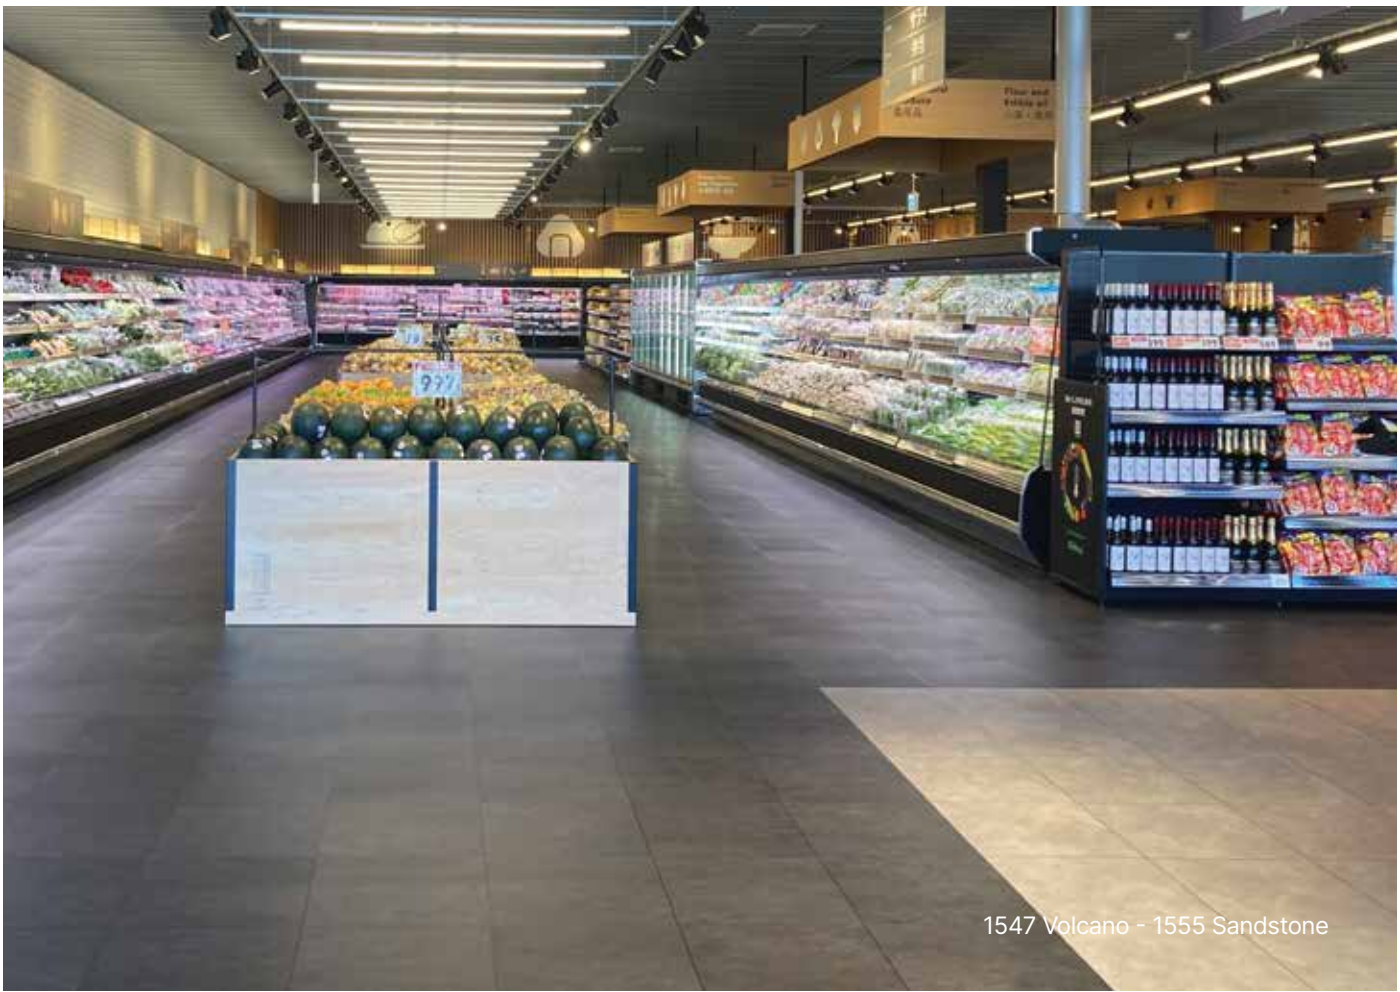


1547 Volcano - 1555 Sandstone

Access and corner available (Black, Dark grey, Light Grey and Brown)

Combine Design tile
with **GTI Max** tiles & **Creation 70 Clic** planks!



1699 Luberon Grey / 0249 Carbon (GTI® Max Connect)

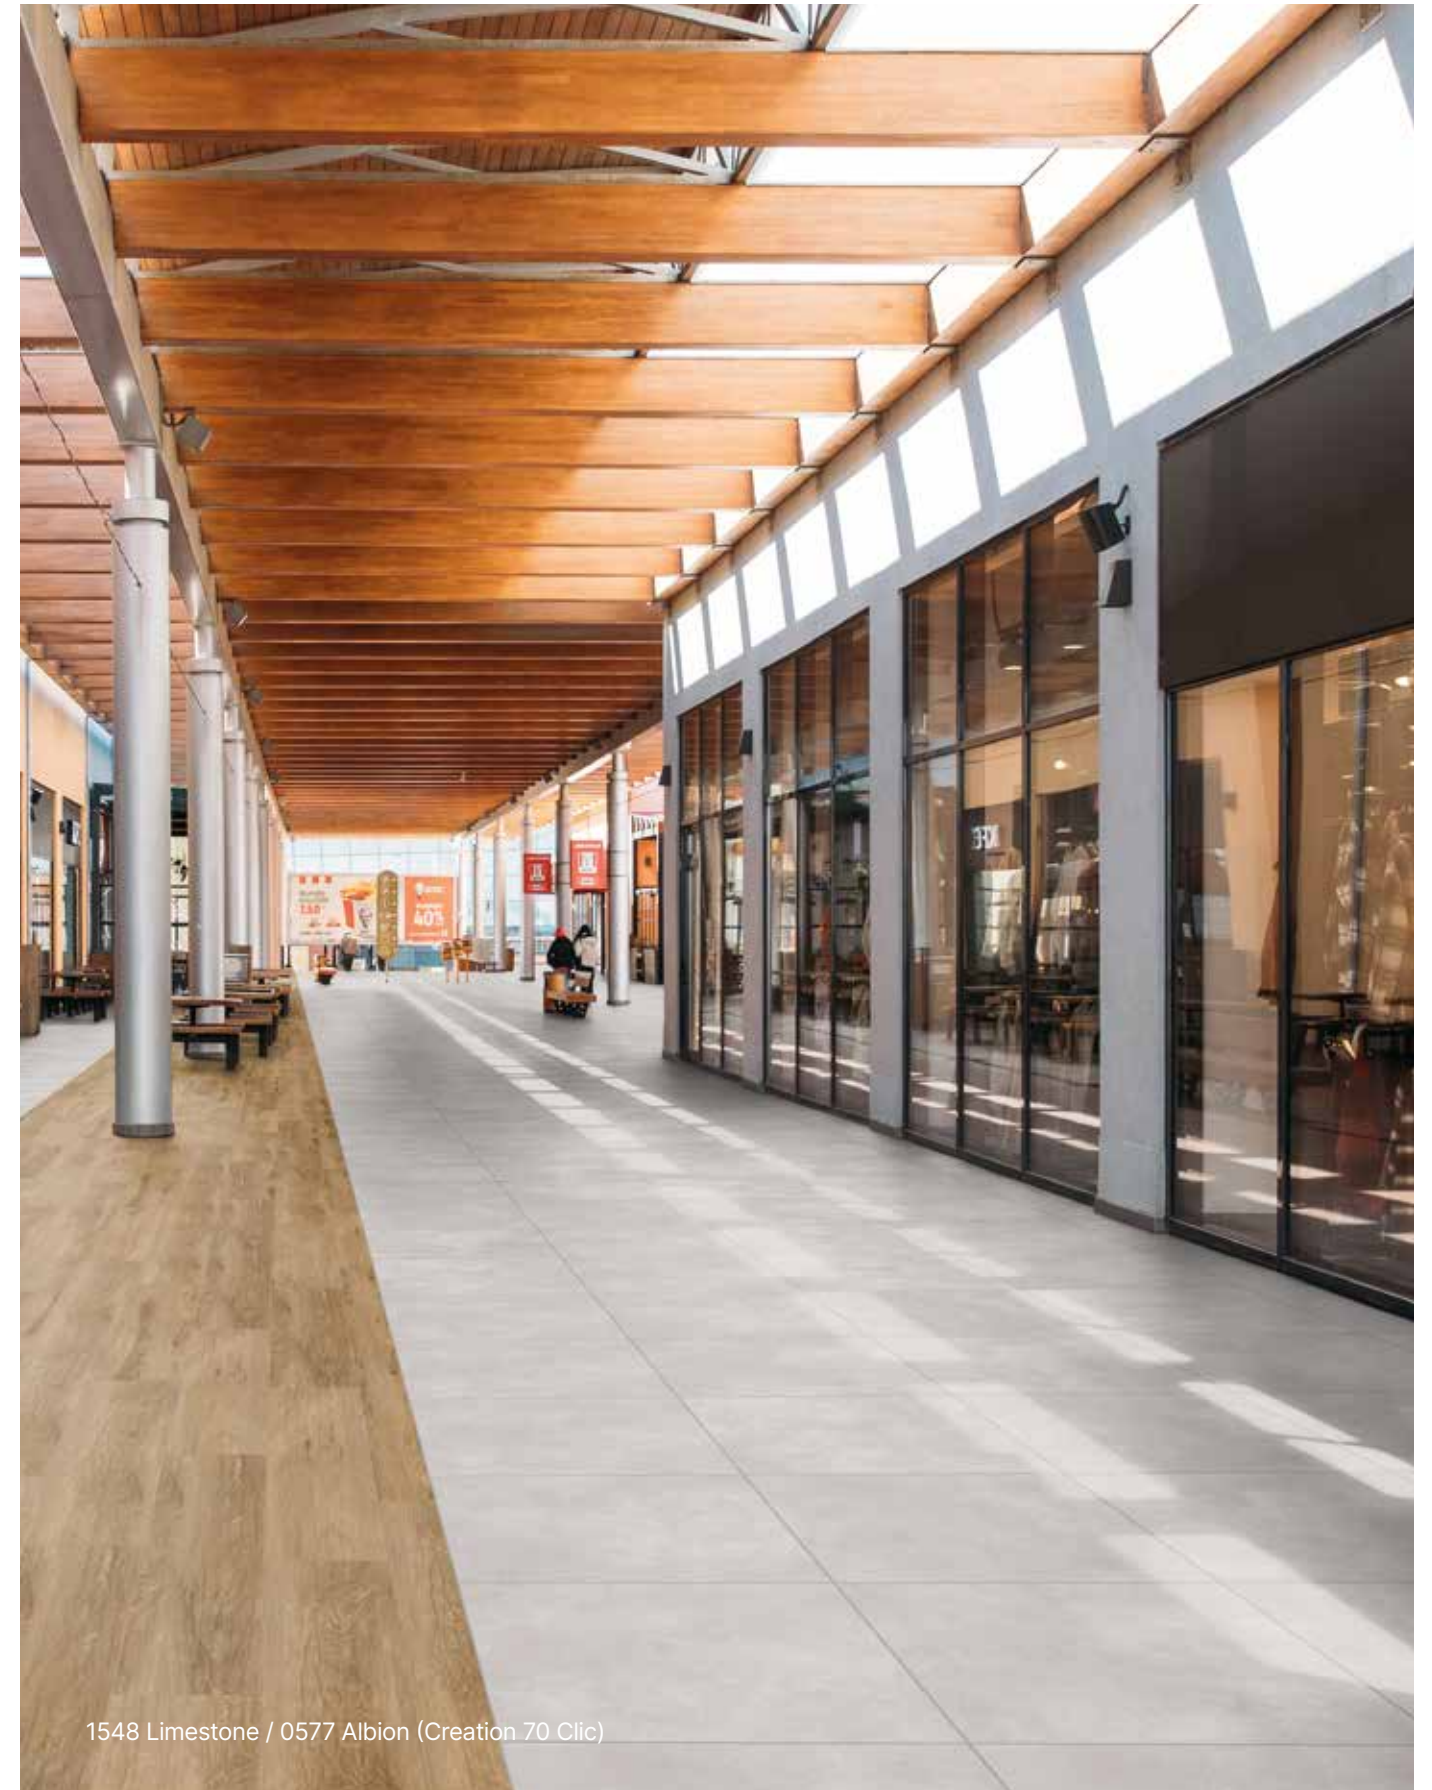

1548 Limestone / 0577 Albion (Creation 70 Clic)

Notes

Design Tile			
Description			
Total Thickness	EN ISO 24346	mm	7.8
Thickness of the wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m²	12 000
Size	EN ISO 24342	mm	457 × 457 / 614 × 614
Number of planks per box / m² per box	-	-	457×457 format : 5 / 1.04 m² 614 ×614 format : 3 / 1.13 m²
Classification			
Norm/Product Specification	-	-	EN ISO 10582
European Classification	EN ISO 10874	Class	34-43
Fire Rating	EN 13501-1	Class	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2
Slip Resistance Wet	EN 16165 app.B (DIN 51 130)	Class	R10
Performances			
Wear Resistance	EN 660.2	mm³	≤ 2.0
Wear Group	-	group	T
Type Binder content	ISO 10582	group	I
Curling	EN ISO 23999	mm	≤ 1
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Residual Indentation	EN ISO 24343-1	mm	≤ 0.05
Castor chair test	ISO 4918	-	OK
Shore hardness	EN ISO 868	H _o	> 60
Thermal Conductivity	EN ISO 10456	W/(m.k)	0.25
Colour Fastness	EN 20 105 - B02	degree	≥ 6
Surface Treatment	-	-	PUR+
Chemical Products Resistance ⁽¹⁾	EN ISO 26987	-	OK
Environment/Indoor Air Quality			
TVOC after 28 days	ISO 16000-6	micrograms/m³	<100
CE Marking			
		EN 14041	   

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.



The information contained in this document is valid from 01/06/2025 and is subject to change at any time without notice.
In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.
Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.
Place mats of sufficient length at entrances to reduce outside sources of dirt.

we care / we act our commitments for 2030



climate

-30% CO₂
scopes 1, 2, 3
in tons eq. CO₂, vs 2019
Science Based Targets⁽¹⁾



resources

75%
biobased, mineral
& recycled⁽²⁾

30%
recycled content⁽³⁾



circularity

65 000
tons of waste treated⁽⁴⁾

45%
looselay⁽⁵⁾



health & well-being

100%
of our products perform
better than Indoor Air Quality
standards⁽⁶⁾

95%
sales covered by EPD⁽⁷⁾



people

30%
women⁽⁸⁾

40%
internal mobility⁽⁹⁾

Towards 0
accident⁽¹⁰⁾

More details: 1. Scopes 1, 2 & 3, in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2. Origin of raw materials for the entire Floor & Wall portfolio, on average, by weight; including 15% virgin salt, a primary element in vinyl manufacturing. Compared to 71% in 2024. 3. Average content in the Floor & Wall vinyl portfolio, by weight. Compared to 21% in 2024. 4. Recycled in our factories and recycling units. Compared to 59 040 tons in 2024. 5. % of Floor activity with non-glued products, easy to remove, easy to re-use. Compared to 40% in 2024. 6. 100% of vinyl and linoleum sold to the building market below 100 micrograms /m³ (TVOC 28 days). 7. % of Floor & Wall activity covered by Environmental Product Declarations (EPD). Compared to 44% in 2024. 8. % women in our global workforce and among our managers. Compared to respectively 26% and 27% in 2024. 9. % job openings filled with internal hires worldwide. Compared to 25% in 2024. 10. Towards 0 accident: Lost time accident per million hours worked: below 3 vs 8,9 in 2024, for Gerflor employees worldwide.

