



# Saga<sup>2</sup>

Acoustical Luxury Vinyl Tile

**Gerflor**<sup>®</sup>

# Sustainable by Design

## Cork: Naturally High Performance



Natural & Rapidly  
Renewable



Strong Indentation  
Resistance

## Reduces Carbon Footprint



Reduce carbon emissions in  
your projects.

With the urgency of climate change  
and the scarcity of natural resources,  
we are committed to reducing the  
environmental impact of our products.

**Together, we can build a more  
sustainable future, one step at a time.**

**we care / we act**



# Why choose Saga²?

Saga² is a noise-reducing resilient modular tile designed to match the thickness of carpet tiles, enabling seamless installation without the need for transitions. Featuring a cork and vinyl backing, Saga² delivers exceptional sound management throughout any space. With a durable 28-mil wear layer, it is protected by our exclusive ProtecSol® surface treatment, ensuring a no-wax, easy-maintenance surface for the lifetime of the flooring.



## Coordinated Design/Colors

5 Designs | 23 Colors



## Easy Maintenance

Ideal for high traffic areas.



## Acoustic Rating (IIC 58)

Reduces the transmission of sound transmission between adjacent rooms and levels.



1564 Gentleman Terra & 1566 Urban Street Terra

1567 Tamo Clear & 1585 Tweed Green Chine



1561 Tamo Natural




1567 Tamo Clear



1559 Tamo Light



1560 Tamo Dainty

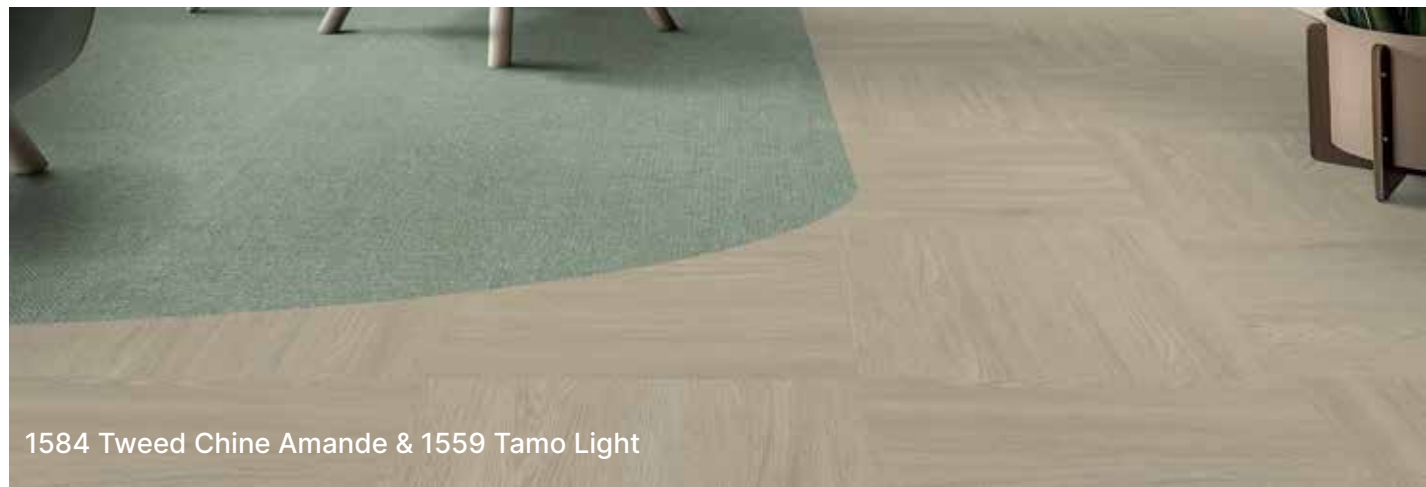


1584 Tweed Chine Amande & 1559 Tamo Light





1563 Gentleman Cream

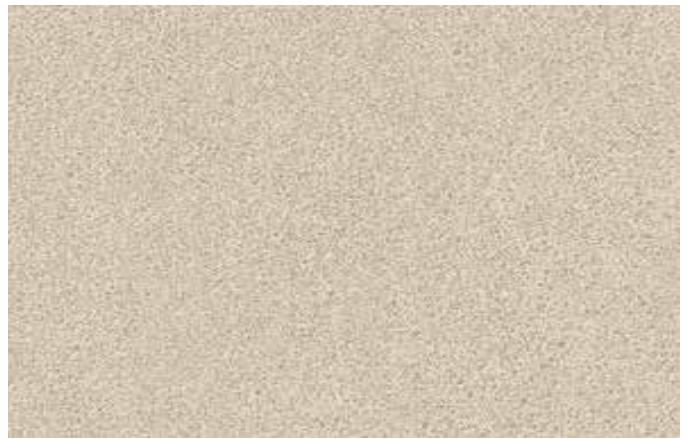

1565 Urban Street Cream



1564 Gentleman Terra




1581 Gentleman Abricot



1587 Tweed Medium Beige



1566 Urban Street Terra

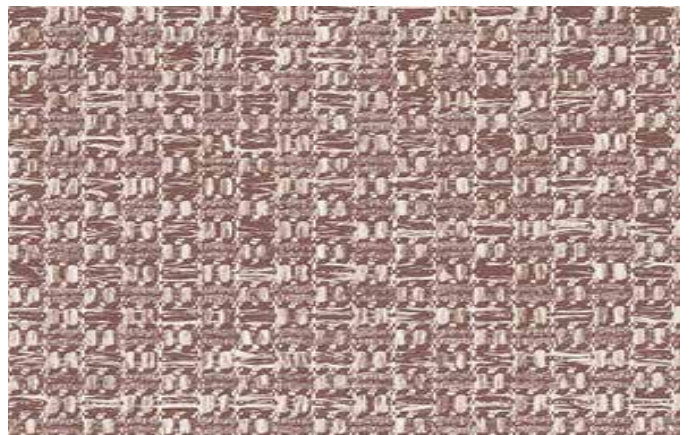


1588 Tweed Rose Ancien






1608 Oxyd Light Beige

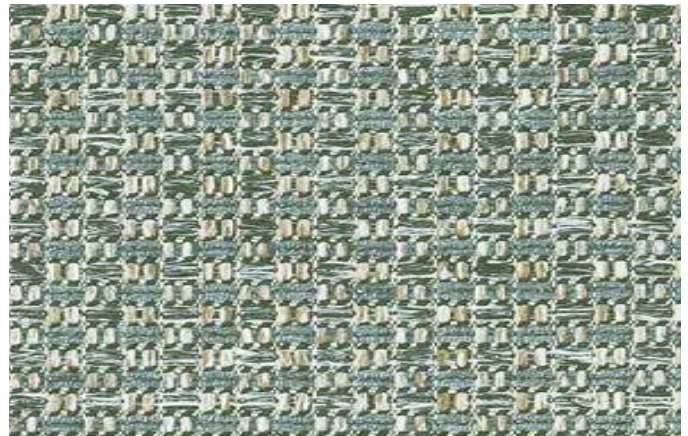

1584 Tweed Chine Amande

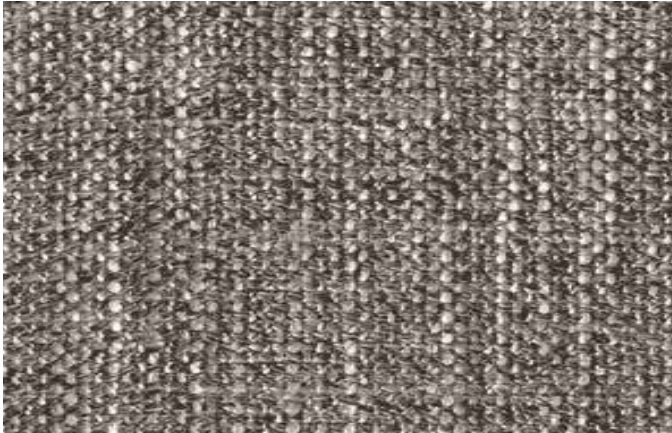

0089 Gentleman Taupe



1609 Oxyd Light Green



1588 Tweed Rose Ancien & 1560 Tamo Dainty




1582 Gentleman Jean Chine




1585 Tweed Green Chine



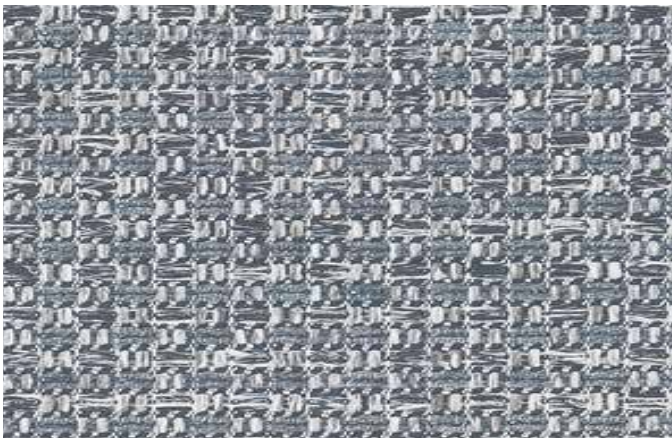

1586 Tweed Light Grey

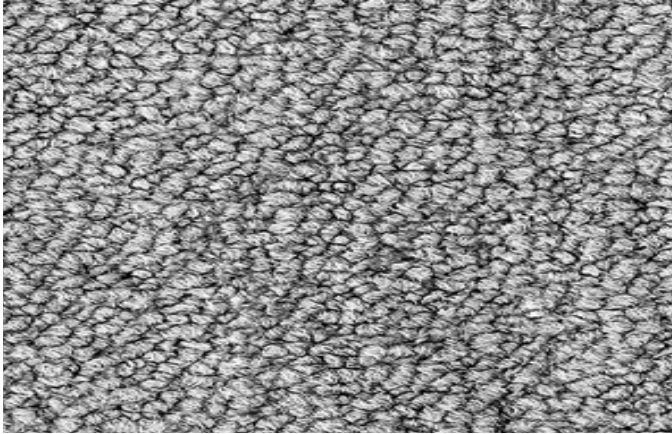

1610 Oxyd Light Grey



1283 Urban Street Light



0030 Gentleman Blue



1284 Urban Street Medium



0088 Gentleman Grey



**GERFLOR USA**  
877-437-3567  
samples@gerflorusa.com  
gerflorusa.com



GENA0154

| DESCRIPTION                                            | STANDARDS                                                                                                                     | REQUIREMENTS | SAGA <sup>2</sup>                                 |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------------------------------------|
| PRODUCT DESCRIPTION                                    |                                                                                                                               |              |                                                   |
| Reference Specification*                               | ASTM F1700                                                                                                                    | -            | Class III, Type B                                 |
| Backing                                                | -                                                                                                                             | -            | Compact Backing with Cork                         |
| Surface Treatment/Maintenance                          | -                                                                                                                             | -            | Protecsol®                                        |
| Gauge Total Thickness                                  | ASTM F386                                                                                                                     | -            | 0.18" (4.6 mm)                                    |
| Wearlayer Thickness                                    | ASTM F410                                                                                                                     | -            | 28 mil (0.7 mm)                                   |
| Tile Size                                              | -                                                                                                                             | -            | 19.69" x 19.69"                                   |
| Coverage Per Box                                       | -                                                                                                                             | -            | 26.9 ft <sup>2</sup> (2.5 m <sup>2</sup> )        |
| Weight                                                 | -                                                                                                                             | -            | 1.15 lbs/ft <sup>2</sup> (5.6 kg/m <sup>2</sup> ) |
| PERFORMANCE                                            |                                                                                                                               |              |                                                   |
| Static Load Resistance                                 | ASTM F970                                                                                                                     | ≤ 0.005"     | Meets Requirements                                |
| Indentation - Residual                                 | ASTM F1914                                                                                                                    | ≤ -8%        | Meets Requirements                                |
| Coefficient of Friction                                | ASTM D2047                                                                                                                    | -            | 0.56 (Leather) / 0.94 Neolite                     |
| Hardness                                               | ASTM D2240                                                                                                                    | -            | 95                                                |
| Squareness                                             | ASTM F2055                                                                                                                    | -            | Meets Requirements                                |
| Flexibility                                            | ASTM F137                                                                                                                     | -            | Meets Requirements                                |
| Impact Insulation (IIC)                                | ASTM E989 (ASTM E492)                                                                                                         | -            | IIC 58                                            |
| Chemical & Stain Resistance                            | ASTM F925                                                                                                                     | -            | Meets Requirements                                |
| Resistance to Heat                                     | ASTM F1514                                                                                                                    | ΔE ≤ 8       | Meets Requirements                                |
| Resistance to Light                                    | ASTM F1515                                                                                                                    | ΔE ≤ 8       | Meets Requirements                                |
| Fire Rating - Flame Spread                             | ASTM E648                                                                                                                     | Class 1      | Meets Requirements                                |
| Fire Rating - (Flaming & Non-Flaming)                  | ASTM E662                                                                                                                     | -            | Meets Requirements                                |
| ENVIRONMENT HEALTH & SAFETY                            |                                                                                                                               |              |                                                   |
| Bacterio-Static**                                      | ISO 22196                                                                                                                     | -            | Inhibits spread of infections at 99%              |
| Viro-Static**                                          | ISO 21702                                                                                                                     | -            | Inhibits growth of virus of 99.7% after 2 hours   |
| Manufacturing Plant Certifications                     | ISO 9001, 14001, 50001                                                                                                        | -            | Quality, Environment, Energy                      |
| Environmental Product Declaration (EPD)                | LEED v4 M+R                                                                                                                   | -            | Product-Specific Type III                         |
| Material Ingredients: Health Product Declaration (HPD) | LEED v4 M+R                                                                                                                   | -            | Self-Declared                                     |
| No Harmful Chemicals                                   | European Chemicals Agency (ECHA)                                                                                              | -            | 100% REACH Compliant                              |
| Sourcing of Raw Material: Recycled Content             | Average Pre-Consumer Content                                                                                                  | -            | 20%                                               |
| Indoor Air Quality                                     | California Standard 01350                                                                                                     | -            | FloorScore® Certified                             |
| Production Waste                                       | In-Plant Recycling                                                                                                            | -            | 100% Manufacturing Waste Recycled                 |
| TVOC after 28 days                                     | ISO 16000-6                                                                                                                   | -            | <10 µg/m2                                         |
| WARRANTY                                               | 10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com |              |                                                   |

\*Rubber leaves indelible stains on synthetic floorings: Do not use mats or any other products with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

\*\* The best defence against the spread of infections is the implementation of an effective cleaning method.

For the most updated documentation and specification content, please visit [gerflorusa.com](http://gerflorusa.com)

SAGA<sup>2</sup> USA Binder - 2025

