



STONE 55





STONE 55

Virtuo Stone 55 tiles are ideal for permanent, glued installation to prevent any expansion or contraction in areas where temperature fluctuations are frequent. Some regions of Australia can face scorching heat and freezing cold. Factors such as underfloor heating, direct sunlight exposure and variations in maximum and minimum temperatures all affect whether a loose lay or glued system is more appropriate for your needs.



EASY MAINTENANCE



HEAVY DUTY

100% RECYCLABLE

RESILOOP READY




WATERPROOF



ULTRA REALISTIC



VERY LOW VOC COUNT

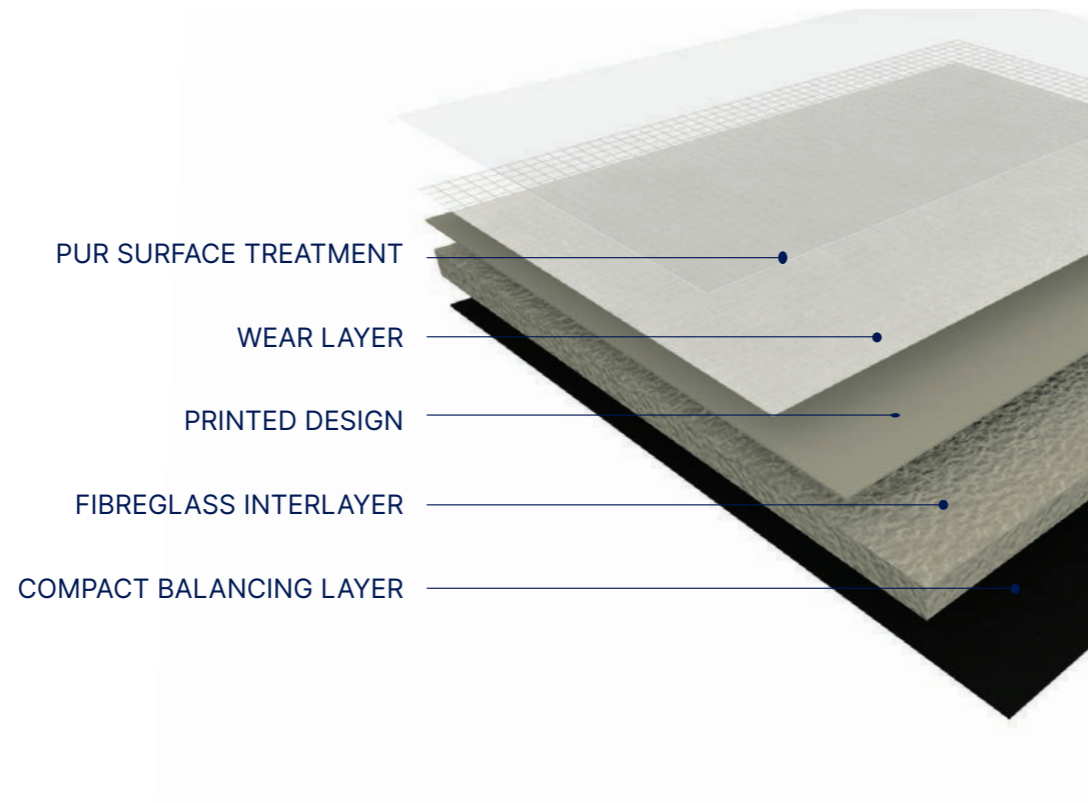

VIEW IMAGES OF THE VIRTUO RANGE


* Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure or for compensation for any other loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For more details call 1800 060 785 or visit gerflor.au

COLLECTION




2421 Curton Charcoal

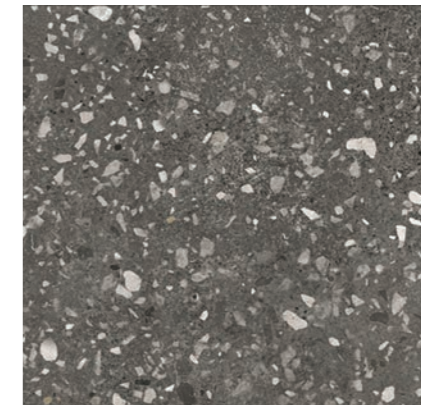

2422 Granito Grey




2423 Concrete Grey

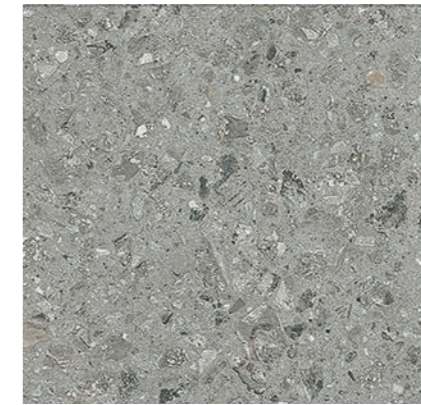

2424 Aquitaine Bister




2425 Curton Stone

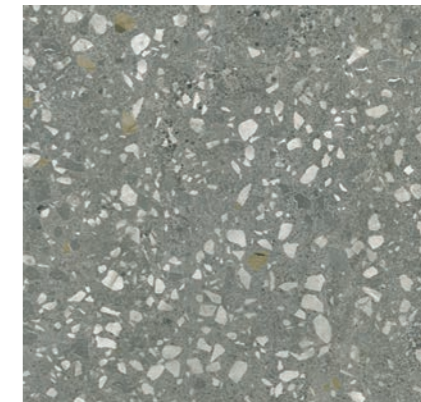

2426 Granito Smoke



2427 Aquitaine Pearl

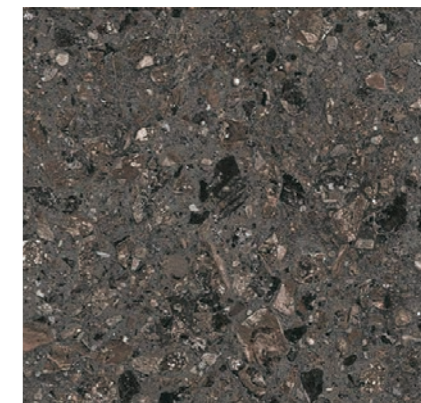


2428 Aquitaine Ash

**CURTON
CHARCOAL**
2421



GRANITO
GREY
2422

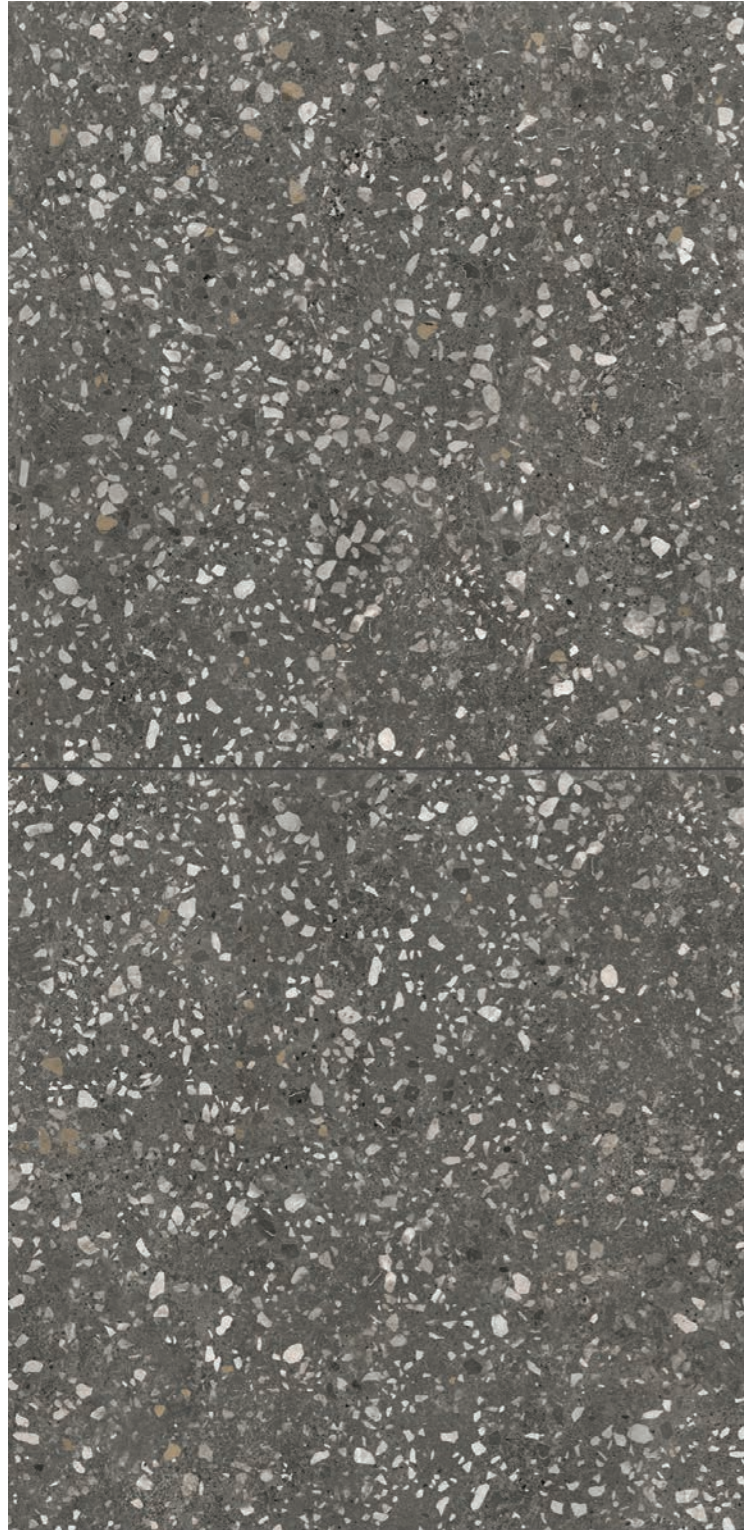

CONCRETE
GREY
2423



AQUITAINE
BISTER
2424




CURTON
STONE
2425



COFFEE	2.5
ESPRESSO	2.5
MACCHIATO	3
CAPPUCCINO	3.5
LATTE	4
MOCHA	5
HAND POURED COFFEE	5
TEA	3.5


GRANITO
SMOKE
2426

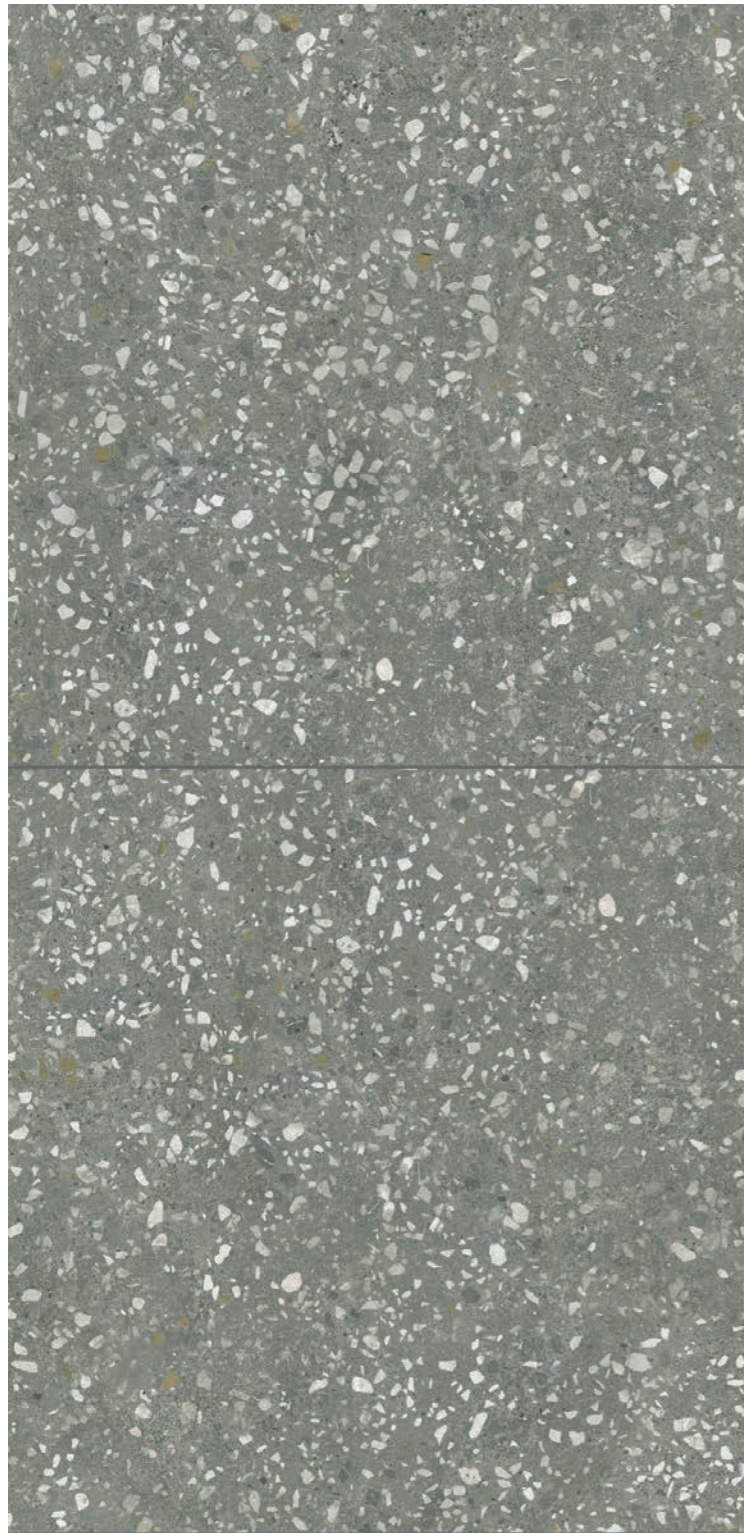

AQUITAINE
PEARL
2427



AQUITAINE
ASH
2428

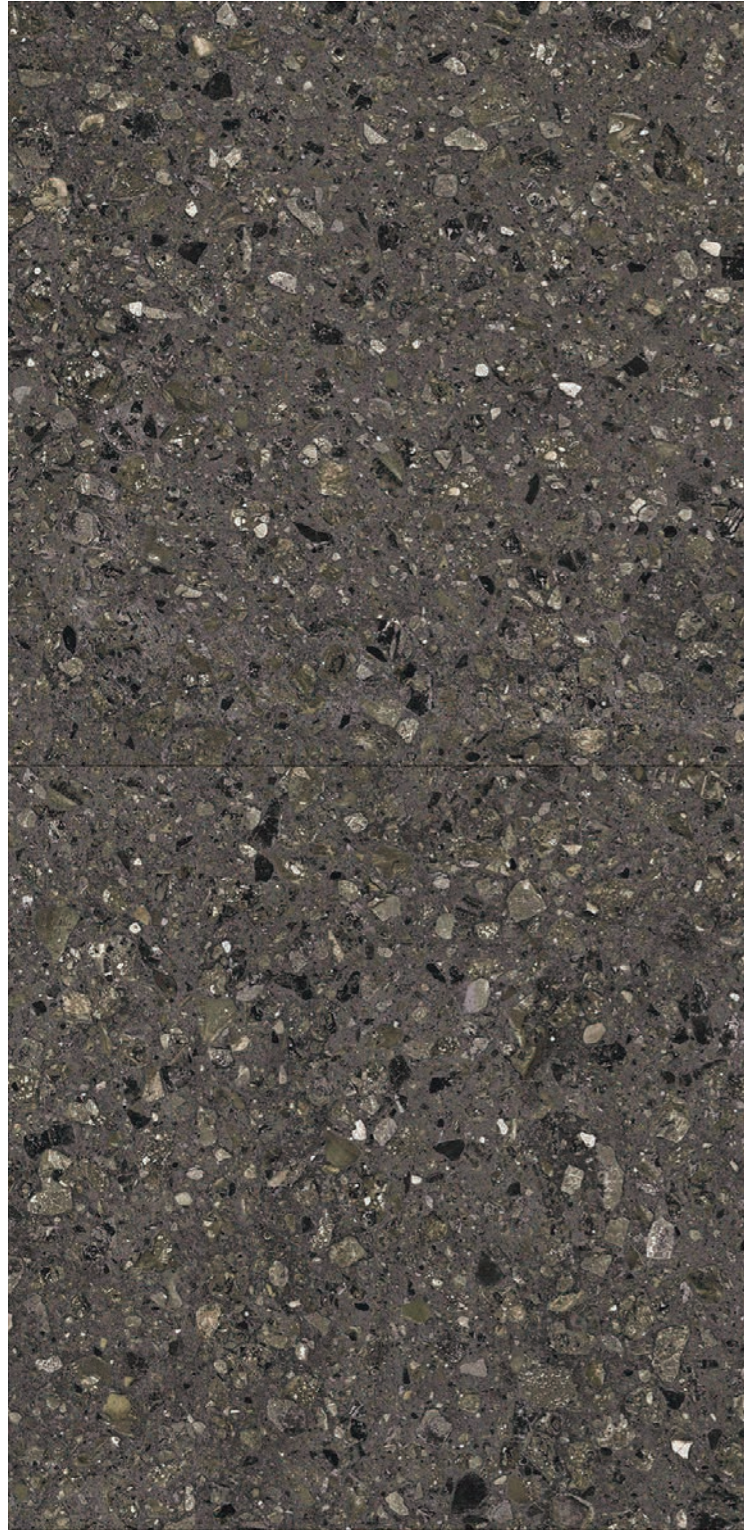

VIRTUO STONE 55 LVT SPECIFICATIONS	STANDARD	UNIT OF MEASURE	
THICKNESS	ISO 24346	mm	2.5
WEAR LAYER THICKNESS	ISO 24340	mm	0.55
DIMENSIONS	ISO 24342	mm	610 × 610
AREA PER BOX		m ²	3.55
PLANKS PER BOX		qty	9
SLIP RESISTANCE	AS 4586	class	R10
	AS 4586:2013	class	P3
FIRE RATING	AS ISO 9239-1	kW / m	29.0
		smoke% / min	126
VOLATILE ORGANIC COMPOUNDS [VOC]	ASTM D5116	mg/m3/hr (24hrs)	Extremely low



gerflor.au | 1800 060 785



SUSTAINABILITY
AT GERFLOR

