

REZILLSLEEPER™ - FLOATING SYSTEM



Flooring

North American Maple
Thickness: 20 mm / Width: 57 mm

Resilience

12 mm Rezill pads

Subfloor construction

Plywood sleepers
Thickness : 24 mm / length of each sleeper : 2.44 m



Manufacturing:
ISO 14001:2004
CERTIFIED



Recycled Contribution:
RezillSleeper™ Subfloor System
includes components with
recycled content

One material, three natural grades

First grade



Second and better grade



Multipurpose grade




Partner of major sports events



Gerflor®

REZILLSLEEPER™ - FLOATING SYSTEM

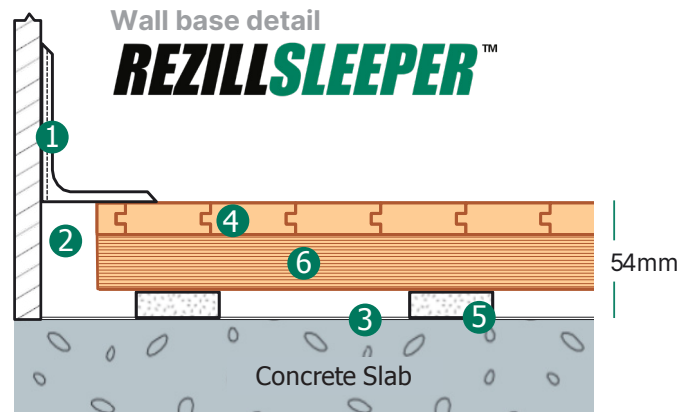

- ① Vented Cove Base (76 mm x 102 mm)
- ② Expansion Space (38 mm)
- ③ Vapor Barrier
- ④ Maple strips (20mm x 57mm)
- ⑤ Rezill Pad
- ⑥ RezillSleeper™

Product characteristics

	Standard	Requirement	Unit	Results
Product description				
Finish Flooring	-	-	-	Hardwood Maple Strip Flooring
Sub-Floor	-	-	-	Plywood sleepers 2.44 m x 7.62 cm x 2.46 cm
-	-	-	-	Rezill R4 pads: 5.08 cm x 5.08 cm x 1.27 cm and polyurethane bound compressed rubber fibers
Thickness	EN 428	-	mm	54
Sport properties				
Shock absorption	EN 14808	≥ 40	%	≥ 55
Vertical deformation	EN 14809	≤ 5	mm	≤ 5
Sliding coefficient	EN 13036-4	80 to 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EV ISO 5470-1	≤ 0.08	g	≤ 0.08
Impact resistance	EN 1517	≥ 8	-	No damage
Indentation resistance	EN 1516	≤ 0.5	-	No damage
Classification				
Fire	EN 13501-1	-	-	
Declaration of performance				
-	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load Resistance to wear	