

QUICKLOCK™ - PORTABLE SYSTEM



Flooring

North American Maple
Thickness: 20 mm / Width: 57 mm

Resilience

18 mm Powershok™ pads

Subfloor construction

Full sleeper and panel subfloor framing
with laminated double sleepers

Locking system

Panels of 1.23 m x 2.14 m - Weight: 80 kgs



Recycled Contribution:
Quicklock™ Subfloor System
includes components with
recycled content

One material, three natural grades

First grade



Second and better grade



Multipurpose grade



Partner of major sports events




Gerflor®


QUICKLOCK™ - PORTABLE SYSTEM



- ① Maple strips (20 mm x 57 mm)
- ② Resilient Pads (18 mm)
- ③ Laminated (19 mm x 89 mm) Sleeper
- ④ Subfloor (7 mm)
- ⑤ Full Subfloor Frame
- ⑥ Quick Pin
- ⑦ Continuous Steel Tongue

Assembly attachment
QUICKLOCK™

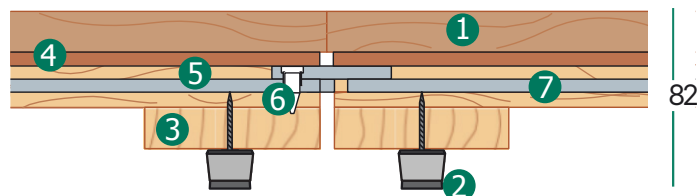

Product characteristics				
Standard	Requirement	Unit	Results	
Product description				
Finish Flooring	-	-	-	Hardwood Maple Strip Flooring
Sub-Floor	-	-	-	1229 x 2140 mm
-	-	-	-	Quicklock™ steel plate interlocks with high impact polyethylene grooves and heavy duty Steel tongue + full sleeper and panel subfloor framing with laminated double sleepers (19 x 89 mm)
Thickness	-	-	mm	82
Sport properties				
Shock absorption	EN 14808	≥ 40	%	≥ 55
Vertical deformation	EN 14809	≤ 5	mm	≤ 5
Sliding coefficient	EN 13036-4	80 to 110	-	80 - 110
Ball Bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EV ISO 5470-1	≤ 0.08	g	≤ 0.08
Impact resistance	EN 1517	≥ 8	-	No damage
Indentation resistance	EN 1516	≤ 0.5	-	No damage
Classification				
Fire	EN 13501-1	-	-	
Declaration of performance				
-	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load Resistance to fire Resistance to wear	