



Nerok 55/70

For medium and high traffic applications

Gerflor®

Nerok

Complete solution
for High Traffic



Nerok 55: Class 33
Nerok 70: Class 34



Available in
4 & 2m width



R10



100 % recyclable



Indoor air quality
TVOC 10 times better
than norms requirement



High indentation
resistance



36 colors




2013 - Sherwood Blond



Wide choice of realistic designs

Wood


Realistic embossing

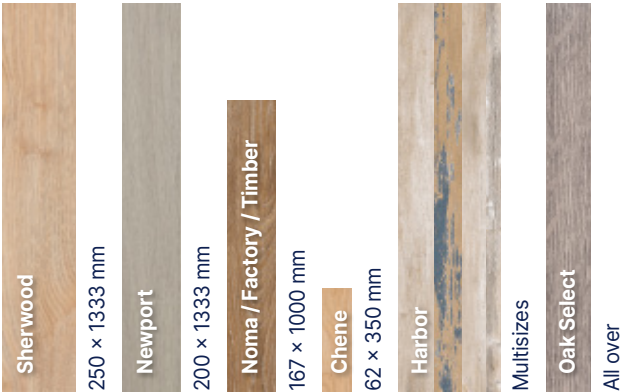

MATT Surface

PUR+ matt

-30% brightness vs standard varnish

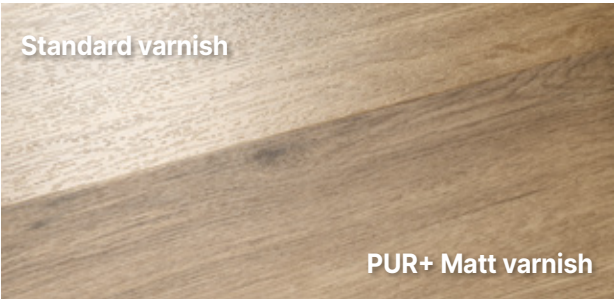

Mineral

4 designs



Nerok 55 / Nerok 70



2012 - Sherwood Clear



0669 - Chene Light



Interior Designer

interiordesigner.gerflor.com

Sample



1518 - Factory White



2244 - Newport Clear



Noma Kola



0720 - Timber Clear



2013 - Sherwood Blond



2245 - Newport Natural



1451 - Noma Kola



Harbor Blue



0476 - Noma Miel



1893 - Harbor Blue



2242 - Oak Select Country



0492 - Timber Cabana



2015 - Sherwood Brown



6 dB
2-4 m



2017 - Sherwood Grey



1751 - Timber Grey



1430 - Oak Select Dark Grey

To validate your choice, order a 16×24 cm sample: www.gerflor.com

Nerok 55 / Nerok 70




2151 - **Shade** Light Grey



2131 - **Leone** Mouse



2135 - **Leone** Cream

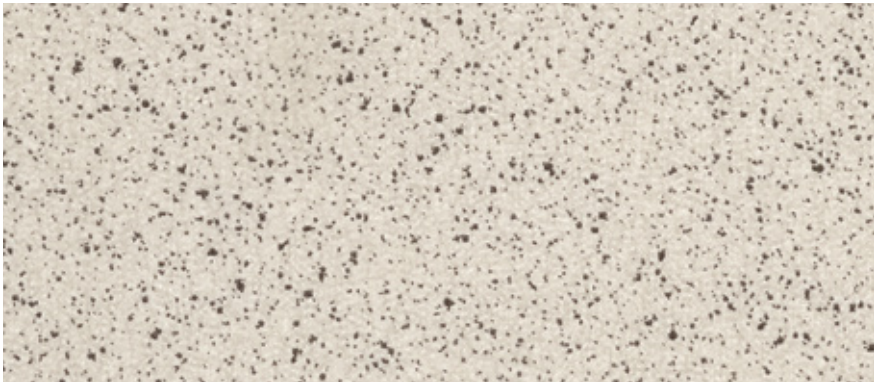


2175 - **Pixel** Clear




2176 - **Pixel** Taupe




2249 - **Brooklyn** Blue

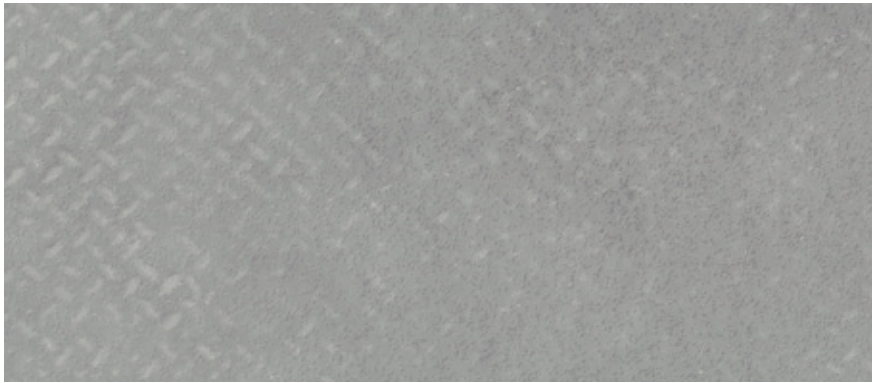

2253 - **Brooklyn** Silver

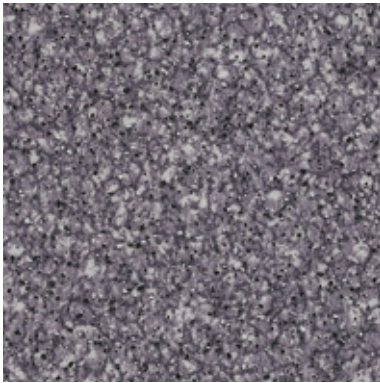


0632 - **Pixel** Anthracite

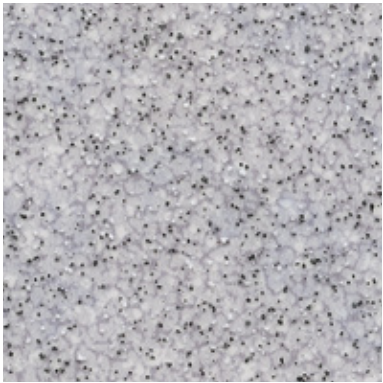


0597 - **Pixel** Silver




0639 - **Pixel** Sand

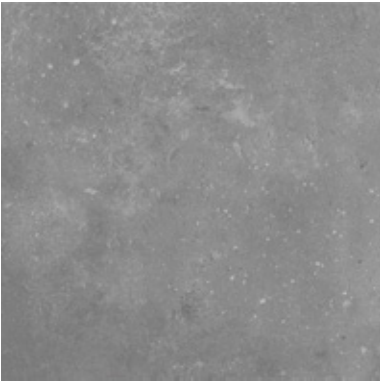


2132 - **Leone** Metal

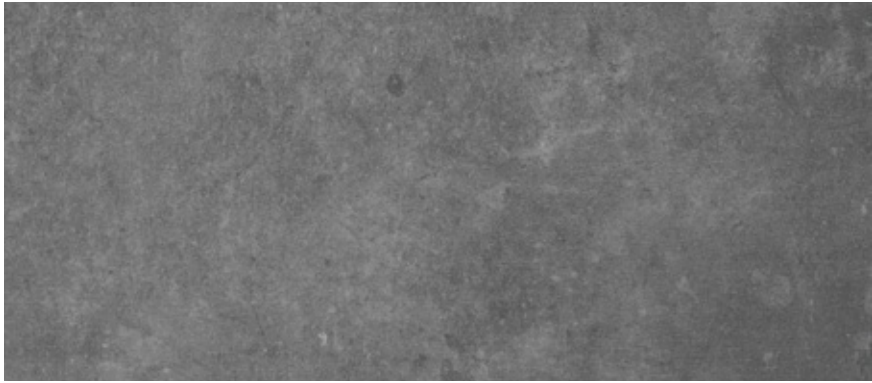

2133 - **Leone** Anthracite

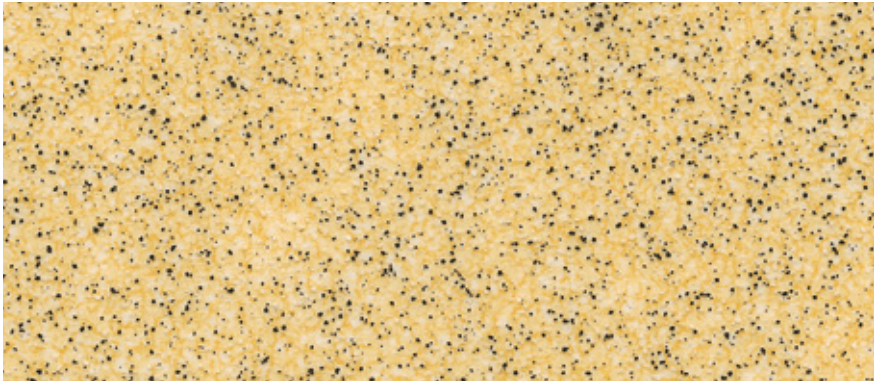


0621 - **Pixel** Vanilla

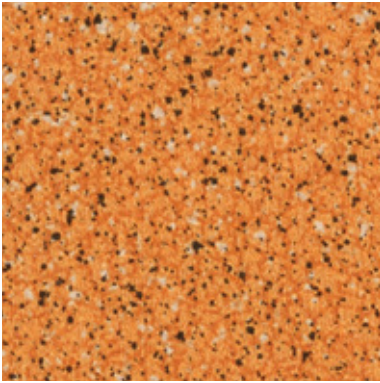

2178 - **Pixel** Paprika




2152 - **Shade** Grey

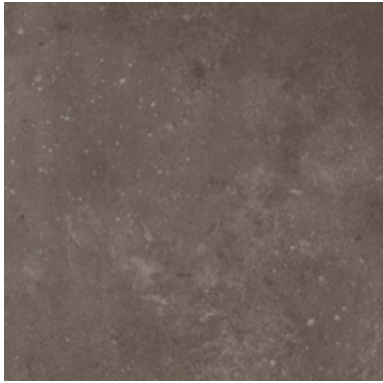


2134 - **Leone** Brown




2153 - **Shade** Anthracite

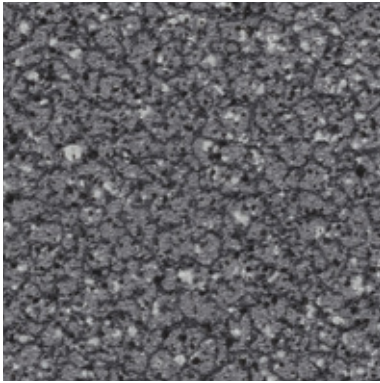

2179 - **Pixel** Black

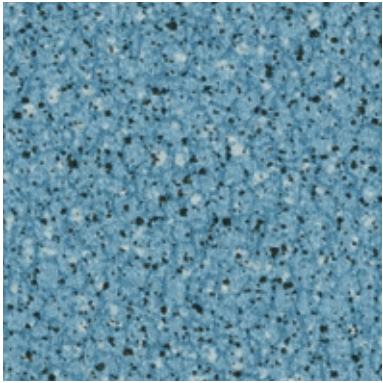

2182 - **Pixel** Ocean

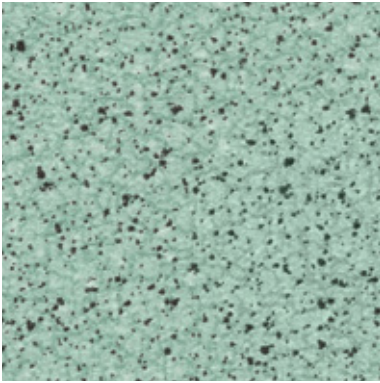

2181 - **Pixel** Meadow



Nerok 55			Nerok 70	
Description				
Total Thickness	EN ISO 24346	mm	2.00	2.00
Thickness of the wearlayer	EN ISO 24340	mm	0.55	0.70
Weight	EN ISO 23997	g/m²	2560	2670
Width of sheet	EN ISO 24341	cm	200 /400	200 /400
Length of sheet	EN ISO 24341	ml	20	20
Phthalate free	-	-	OK	OK
Classification				
Product Specification	-	-	EN ISO 10582	EN ISO 10582
European Classification	EN ISO 10874	Class	33-42	34-43
Fire Rating	EN 13501-1	Class	Bfl-s1	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2	< 2
Slip Resistance Wet	DIN 51 130	Class	R10	R10
Performances				
Wear Resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear Group	QB 30	group	T	T
Type Binder content	EN ISO 10582	type	I	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10
Residual Indentation (average measured value)	-	mm	≈ 0.03	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	6	6
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal Conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour Fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface Treatment	-	-	PUR+	PUR+
Chemical Products Resistance ⁽¹⁾	EN ISO 26987	-	OK	OK
Environment				
Recyclability	-	%	100	100
Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	micrograms/m³	<100	<100
Certification	-	-	Floorscore®	Floorscore®
CE Marking				
CE		EN 14041		

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

 The information contained in this document is valid from 01/01/2024 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force. Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

we care / we act our commitments for 2030



climate

-30% CO₂
scopes 1, 2, 3 in tons eq CO₂ vs 2019. Science Based Targets⁽¹⁾



resources

75%
biobased, mineral & recycled⁽²⁾

30%
recycled content⁽³⁾



circularity

65 000
tons of waste treated⁽⁴⁾

45%
looselay⁽⁵⁾



health & well-being

100%
outperforming Indoor Air Quality standards⁽⁶⁾

95%
sales covered by EPD⁽⁷⁾



people

Towards 0
accident⁽⁸⁾

30%
women⁽⁹⁾

40%
internal mobility⁽¹⁰⁾



More details: 1.Scopes 1, 2 & 3, in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2.Origin of raw materials for the entire Floor & Wall portfolio, on average, by weight; including 15% virgin salt, a primary element in vinyl manufacturing. Compared to 70% in 2024. 3.Average content in the Floor & Wall vinyl portfolio, by weight. Compared to 21% in 2024. 4.Recycled in our factories and recycling units. Compared to 59 040 tons in 2024. 5.% of Floor activity with non-glued products, easy to remove, easy to reuse. Compared to 40% in 2024. 6.100% of vinyl and linoleum sold to the building market below 100 micrograms /m³ (TVOC 28 days). 7.% of Floor & Wall activity covered by Environmental Product Declarations (EPD). Compared to 44% in 2024. 8.Towards 0 accident : Lost Time Injury Frequency Rate(LTIFR) below 3 vs. 8,9 in 2024, for Gerflor employees worldwide. 9.30% women in our global workforce and among our managers. Compared to 26% in 2024. 10.% job openings filled with internal hires worldwide. Compared to 36% in 2024 (France).