



Tarasafe

Safety Flooring

Gerflor®

Tarasafe Ultra

Built for Safety, Made to Last

Tarasafe Ultra is a high-performance safety flooring designed for heavy-traffic, moisture-prone commercial environments. Its durable wear layer is reinforced with patented mineral crystal particles and decorative chips for long-lasting safety and style. Features our exclusive SparClean® surface treatment for superior stain resistance and durability.

Ideal for:

- Healthcare back-of-house
- Commercial kitchens
- Any high-risk, safety focus spaces



Heavy traffic

Our safety flooring is built to withstand heavy loads and constant use



Inhibits spread of infections

R10

Slip Resistant



Tarasafe Ultra H2O

Built for Wet Areas, Made for Safety

Tarasafe Ultra H2O is a high-performance safety flooring designed for wet environments. Its raised, embossed surface provides enhanced slip resistance and exceptional safety for barefoot traffic.

Ideal for:

- Showers and bathrooms, any environment where bare feet are present
- Locker and changing rooms
- Any high-risk, continuously wet spaces



High level of wet and dry slip resistance



Inhibits spread of infections

R11


Slip Resistant

R13

Barefoot Slip Resistant




TARASAFE ULTRA

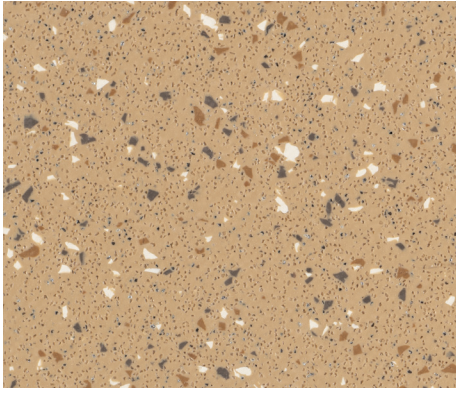


6088 Andalusite

LRV: 35.9

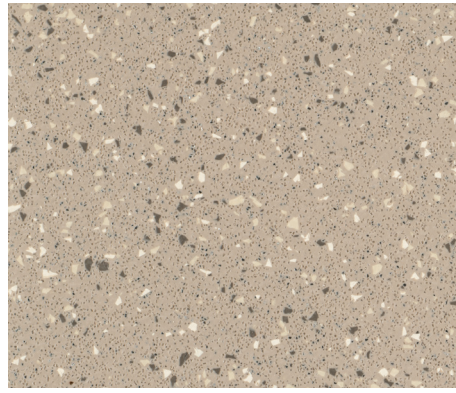


6348 Clay

LRV: 38.7

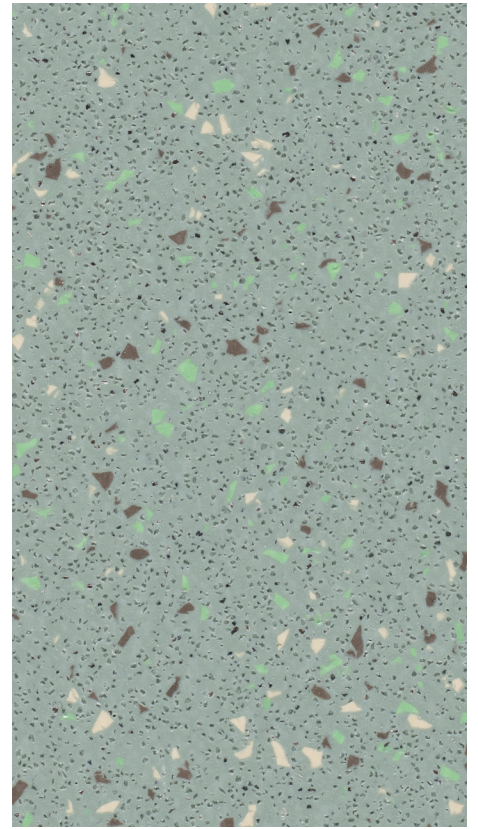


6591 Serpentine

LRV: 32.4

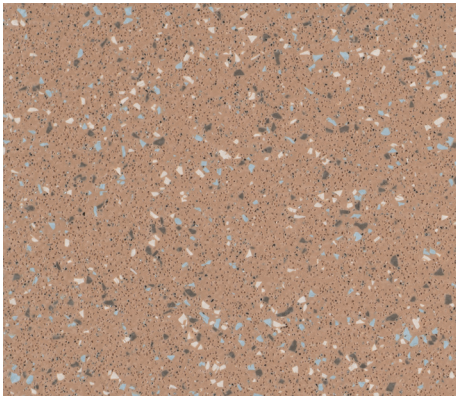


3183 Bauxite

LRV: 28.3

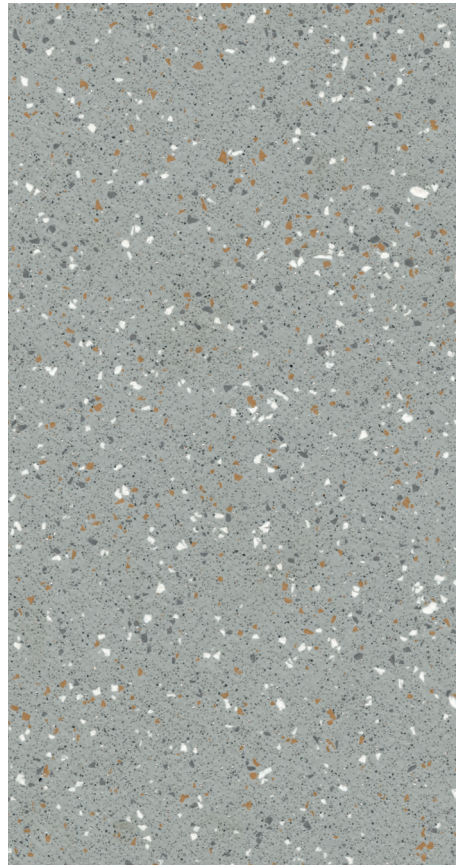


8704 Pebble

LRV: 44.1

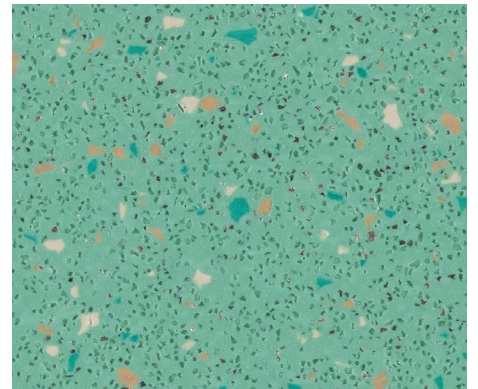


8592 Aventurine

LRV: 32.6

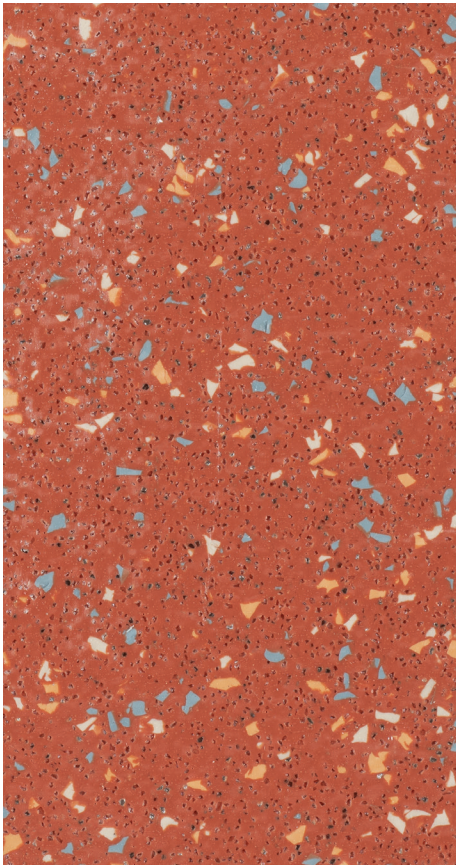


7307 Copper

LRV: 18.5

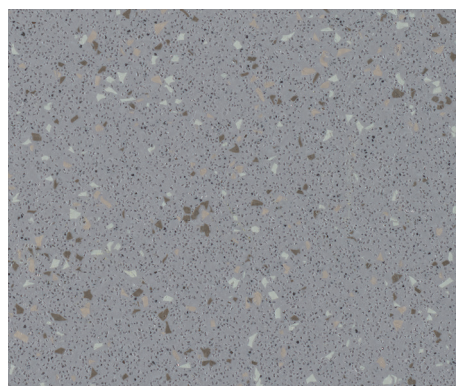

7792 Galena

LRV: 28.8

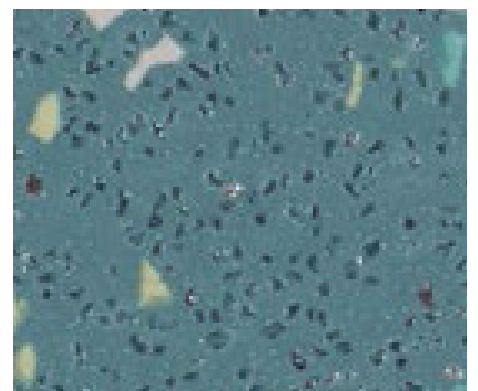


6593 Epidote

LRV: 19.1


LRV: Light Reflectance Value

TARASAFE ULTRA

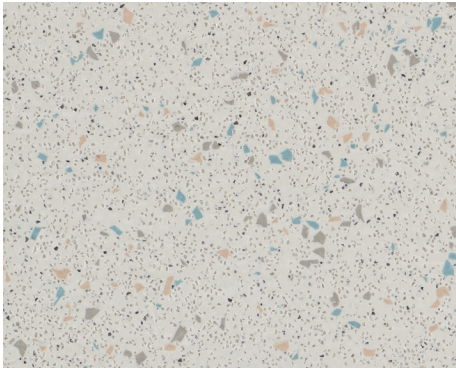


7724 Calcium

LRV: 53.3

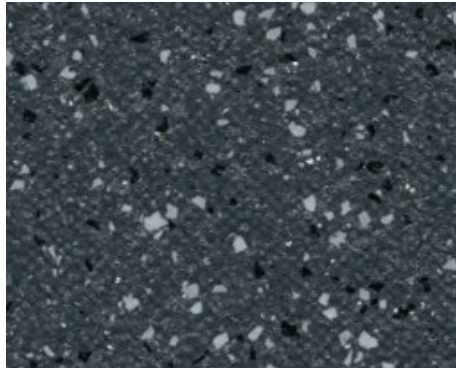


8717 Obsidian

LRV: 10.1

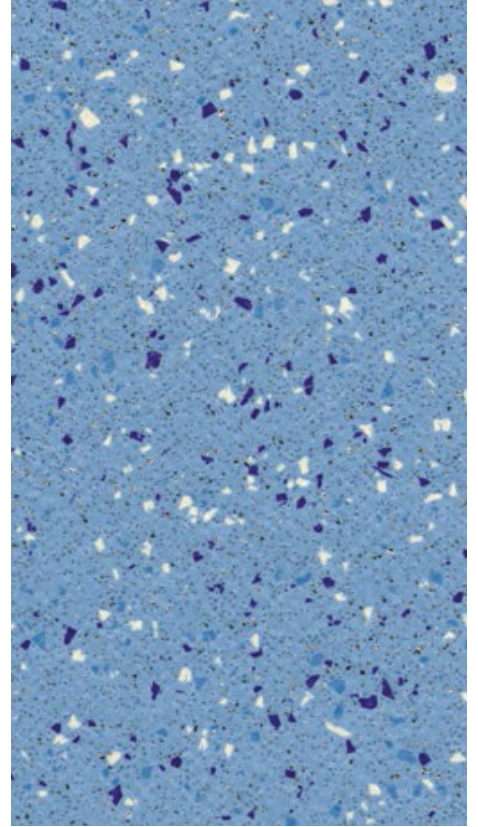


7482 Halite

LRV: 31.8

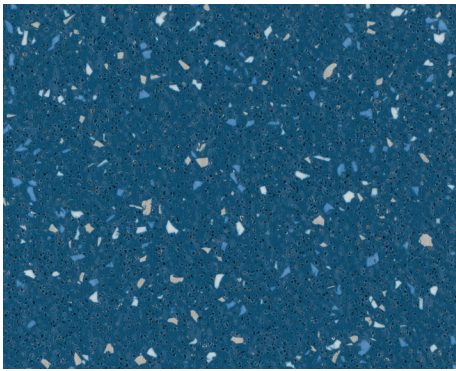


9127 Meteorite

LRV: 11.7

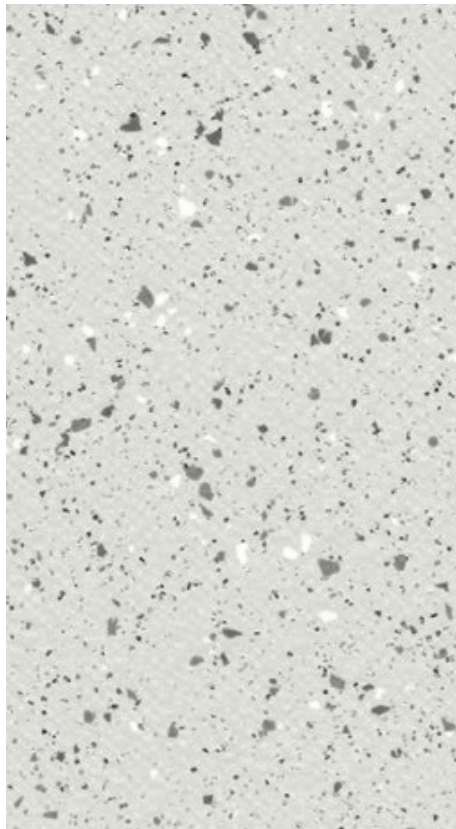


8701 Opal

LRV: 59.1

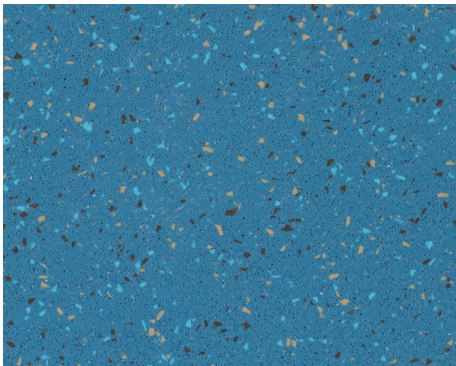


8420 Azurite

LRV: 17.1

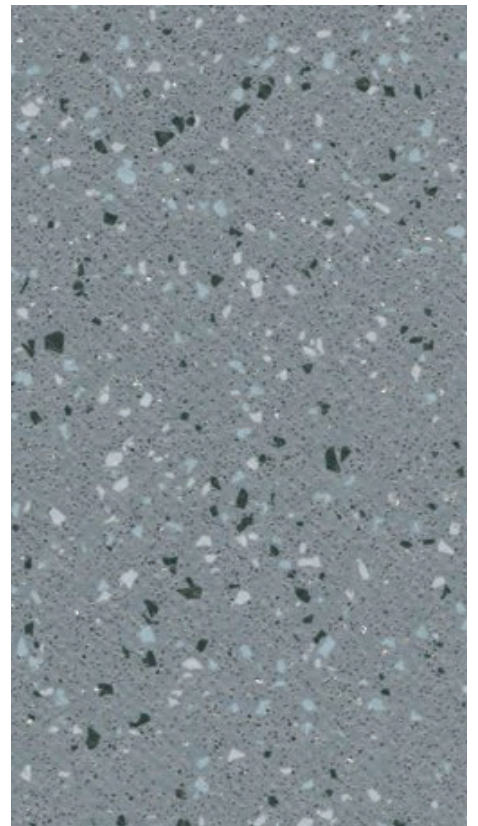


8709 Granite

LRV: 25.4

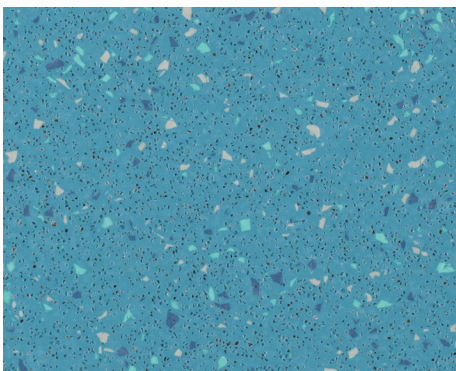

2432 Larimar


LRV: 26.3

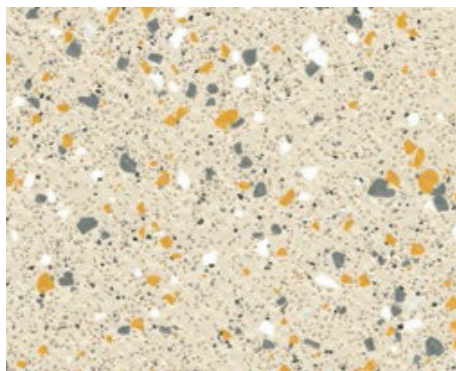

7383 Diopside


LRV: 59.6

TARASAFE ULTRA H2O

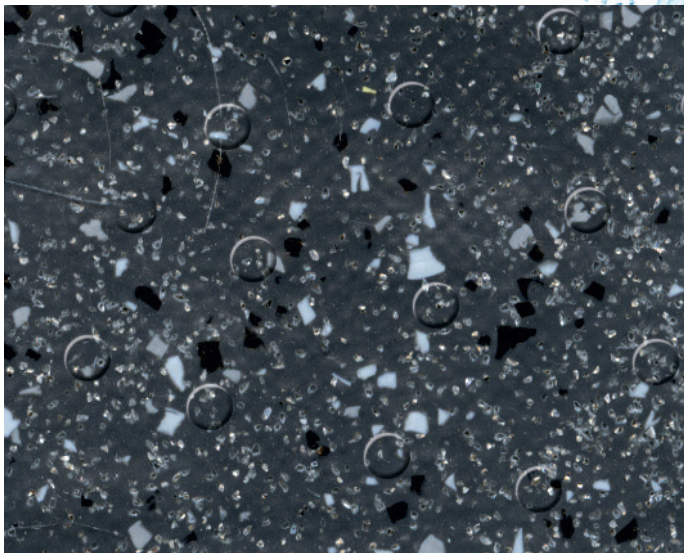


7732 Gravel

LRV: 9.7

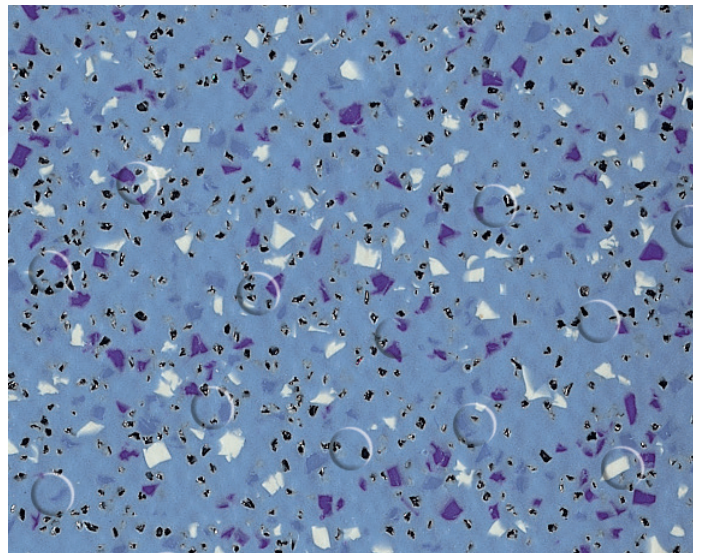


7413 Ocean Blue

LRV: 31.8

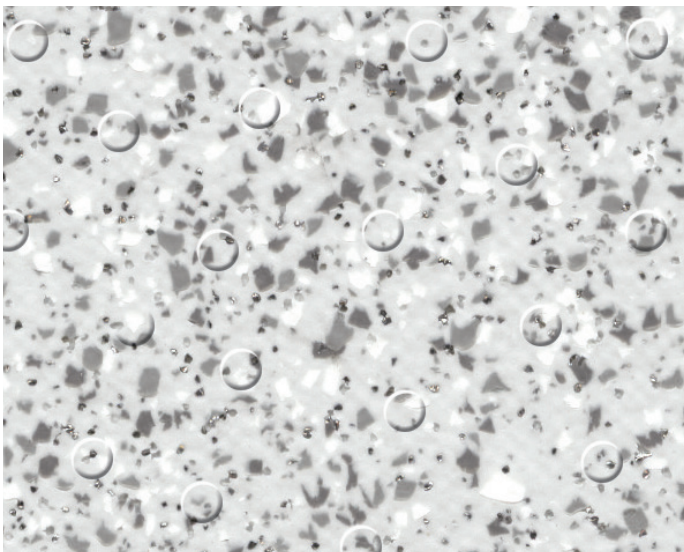


7720 Iceberg

LRV: 60.6

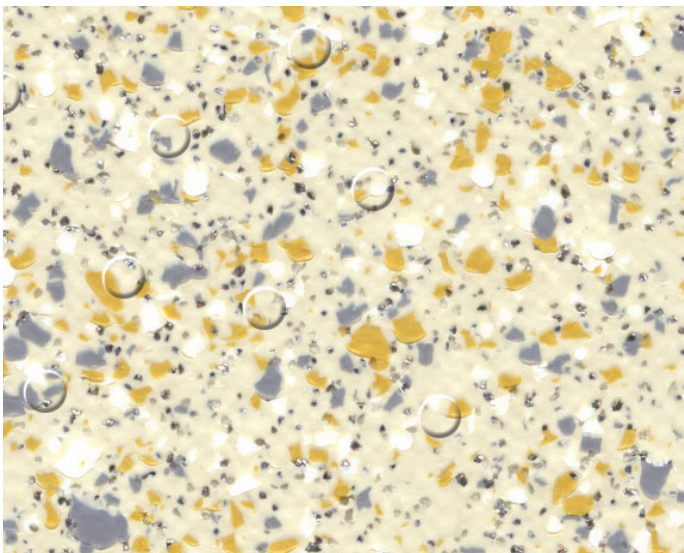

7325 Seashore

LRV: 63.0

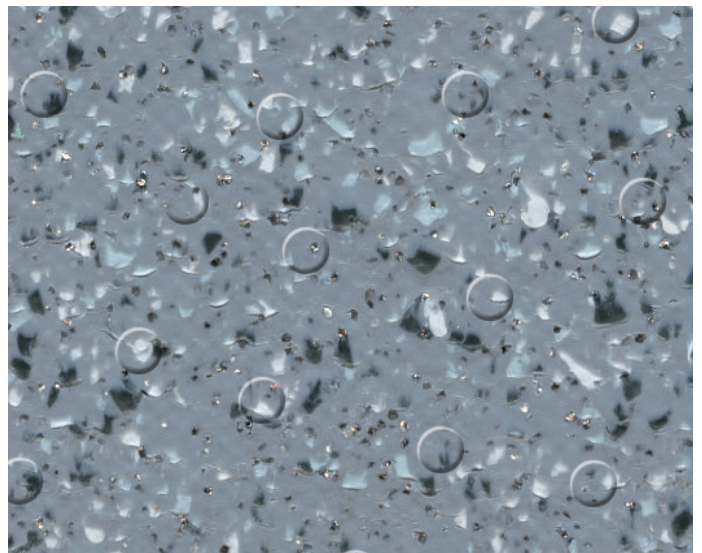

7746 Stone

LRV: 23.6

LRV: Light Reflectance Value



GERFLOR USA
 877-437-3567
 samples@gerflorusa.com
 gerflorusa.com



DESCRIPTION	STANDARDS	REQUIREMENTS	TARASAFE ULTRA	TARASAFE ULTRA H20
PRODUCT DESCRIPTION				
Reference Specification*	ASTM F1303	-	Type 1, Grade 1	Type II, Grade 1
Backing	ASTM F1303	-	Class B	Class B
Construction	-	-	Heterogeneous Sheet Flooring	Heterogeneous Sheet Flooring
Surface Treatment/Maintenance	-	-	SparClean®	-
Gauge Total Thickness	ASTM F386	> 0.075"	0.080" (2.0 mm)	0.080" (2.0 mm)
Roll Width	-	-	6'6" (2.0 m)	6'6" (2.0 m)
Roll Length	-	-	66' (20 m)	66' (20 m)
Coverage/Roll	-	-	430.6 ft ² (40 m ²)	430.6 ft ² (40 m ²)
Weight	-	-	0.48 lb/ft ² (2360 g/m ²)	0.49 lb/ft ² (2400 g/m ²)
PERFORMANCE				
Static Load Resistance & 175 psi	ASTM F970	≤ 0.005"	Meets Requirements	Meets Requirements
Abrasion	ASTM F510	-	Meets Requirements	-
Indentation - Residual	ASTM F1914	≤ 0.007"	Meets Requirements	Meets Requirements
Flexibility	ASTM F137	> 1.5"	Meets Requirements	Meets Requirements
DCOF Wet	ANSI A137.1	≥ 0.42	Meets Requirements	-
Slip Resistance Wet: Ramp test with oil Barefoot only	EN 13845	-	-	R13+
Slip Resistance Wet: Ramp test with oil	DIN 51130	-	R10	R11
Chemical & Stain Resistance	ASTM F925	-	Meets Requirements	Meets Requirements
Resistance to Heat	ASTM F1514	ΔE ≤ 8	Meets Requirements	Meets Requirements
Resistance to Light	ASTM F1515	ΔE ≤ 8	Meets Requirements	Meets Requirements
Coefficient of Friction	ASTM D2047	-	.81 leather / 1.0 neolite	0.82 leather / 0.84 neolite
Impact Insulation (IIC)	ASTM E989 (ASTM E492)	-	IIC 46	-
Fire Rating (Flame Spread)	ASTM E648	Class 1	Meets Requirements	Meets Requirements
Fire Rating (Flaming & Non-Flaming)	ASTM E662	-	Meets Requirements	Meets Requirements
ENVIRONMENT HEALTH & SAFETY				
Bacterio-Static**	ISO 22196	-	Inhibits spread of infections at 99%	Inhibits spread of infections at 99%
Manufacturing Plant Certifications	ISO 9001, 14001, 50001	-	Quality, Environment, Energy	Quality, Environment, Energy
Environmental Product Declaration (EPD)	LEED v5	-	Product-Specific Type III	Product-Specific Type III
Material Ingredients: Health Product Declaration (HPD)	LEED v5	-	Self-Declared	Self-Declared
No Harmful Chemicals	European Chemicals Agency (ECHA)	-	100% REACH Compliant	100% REACH Compliant
Sourcing of Raw Material: Recycled Content	Average Pre-Consumer Content	-	29%	39%
Indoor Air Quality	California Standard 01350	-	FloorScore® Certified	FloorScore® Certified
Production Waste	In-Plant Recycling	-	100% Manufacturing Waste Recycled	100% Manufacturing Waste Recycled
TVOC after 28 days	ISO 16000-6	-	< 100 µg/m ³	< 100 µg/m ³
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on gerflorusa.com			

*Rubber leaves indelible stains on synthetic floorings: Do not use mats or any other products with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**The best defense against the spread of infections is the implementation of an effective cleaning method.

TARASAFE USA Binder - 2025

