



Tiles & planks Senso Collection

2026 Collection

Gerflor[®]



Table of contents

- 4. Gerflor Group
- 9. Interior designer
- 10. Gerflor decoration trends
- 14. Make the right choice

LVT ready to install

- 16. Senso Unik

LVT interlocking

- 24. Senso Premium Rigid Acoustic
- 32. Senso Clic
- 40. Senso 20 Lock

LVT self adhesive

- 44. Senso self-adhesive
- 50. Vinyl tiles

Cleaning - numerical index

- 54. Cleaning instructions
- 55. Numerical index

Find us on social media:



Gerflor Group


80 years of expertise for your projects

Gerflor Group has been designing, manufacturing and marketing innovative, decorative solutions with a focus on environmental and social responsibility.

Gerflor supports professionals and individuals on a daily basis at every stage of their project, from product selection to end-of-life management by offering recycling solutions.

Gerflor's solutions are used in commercial, educational, hospital, sports and residential buildings.


Sales growth

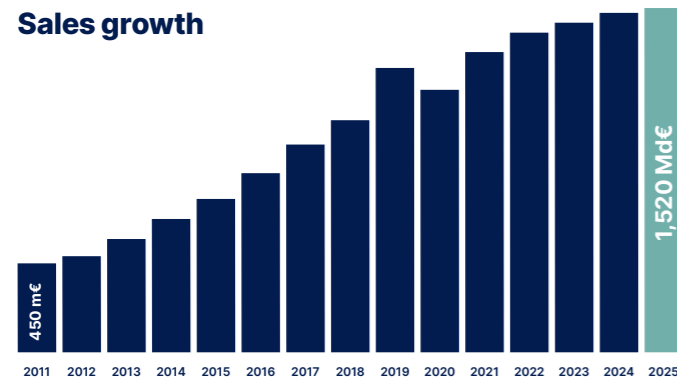

€1.520 billion turnover
5200 employees
24 factories
30 subsidiaries



Distribution of our manufacturing sites and business subsidiaries

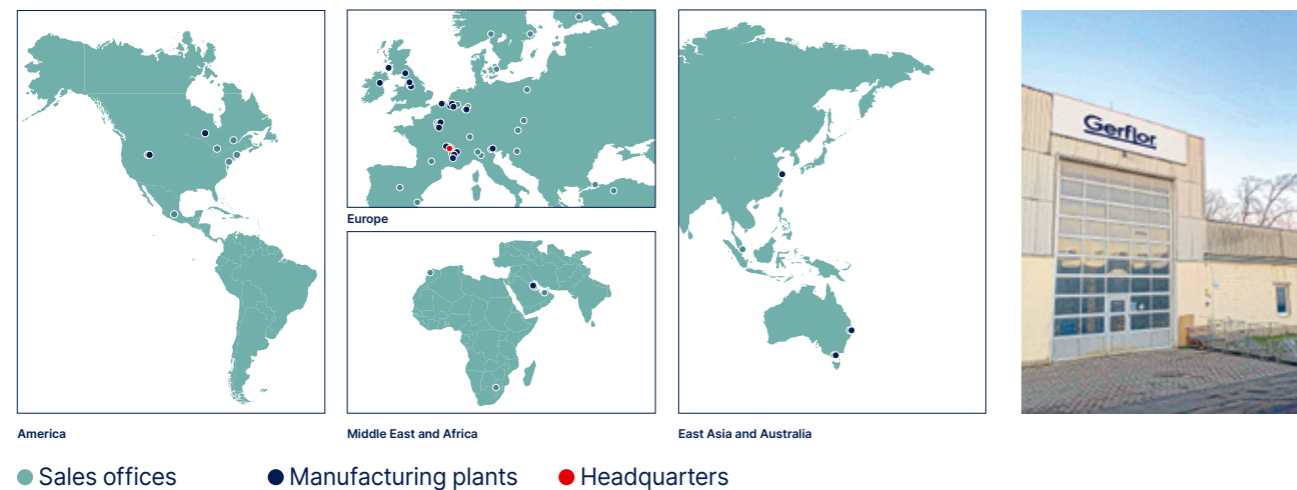

Produce locally for each market

Europe is our main production area and our largest market. Our head office is located in France.

More than 50% of the products sold are manufactured locally, on every continent.

Our products and markets

Experts in solutions for floors and their surroundings, we offer a wide range of technical and decorative solutions, specific to each application market.

A diversified product portfolio

Our range offers a wide choice of materials and formats for floors and walls, as well as accessories for integrated application solutions.




10 market applications

Our approach is spread over 10 markets which makes our business model both robust and balanced.



Sales mainly driven by renovation

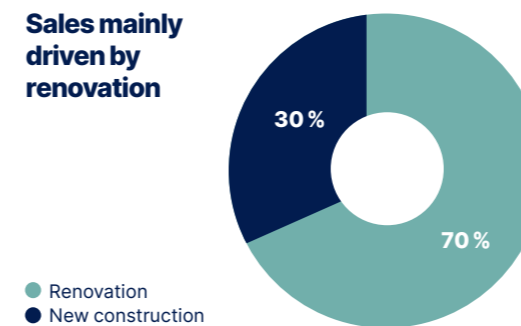


4,000 exclusive designs, developed by our Artistic Direction team



Gerflor Group

Inventor innovation for the home

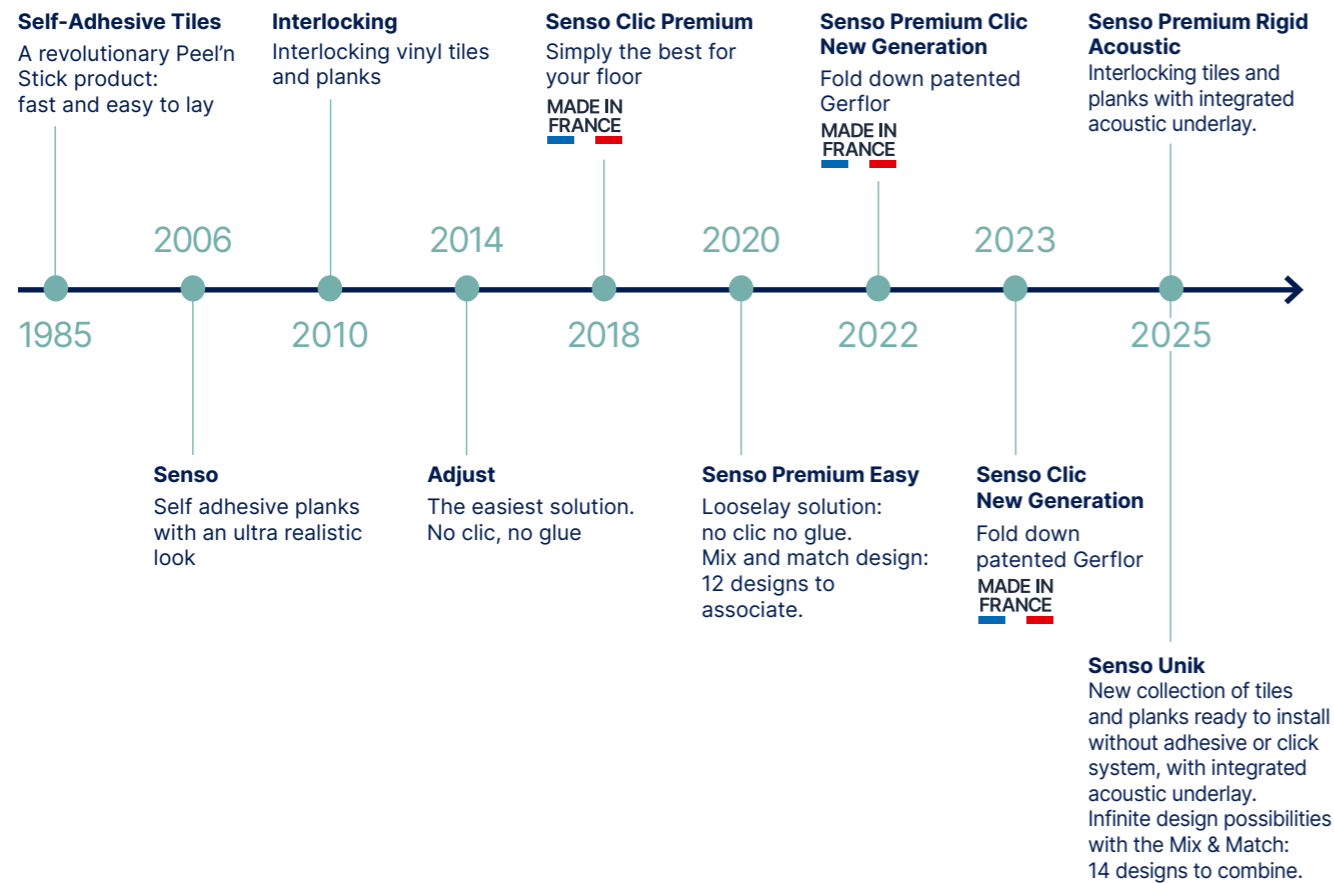

Et Hop ! Here we go again !

Gerflor represents 40 years of innovation, engagement and Made in France pride.

In 1985, Gerflor revolutionised flooring installation with a big innovation: easy installation, accessible to all.

Today, 50% of our products can be installed without glue, concrete proof of our long-term engagement.

To celebrate this anniversary, we have chosen to revive an iconic campaign, an opportunity to show our renewed engagement.



Committed to people and the planet

Faced with the climate emergency, the Gerflor Group has set sustainable development as a strategic priority and is acting daily on 4 axes



Carbon footprint

25 years: this is the average lifespan of Gerflor floors.

Innovate to facilitate and optimize the cleaning of our floors (create high-performance surface treatments to reduce the carbon footprint of the product over its life cycle by limiting consumption of water, energy and cleaning agents).

>70%

Gerflor floor components are of biosourced, mineral or recycled origin

OUR MAIN ECO-DESIGN CRITERIA:

- Material safety (REACH)
- Durability
- Recyclability
- Product lightening
- Recycled content
- Ease of maintenance
- Disassemblability
- Biosourced content



Indoor air quality

Low VOC emissions

- All our products conform to **Floorscore, AgBB, A+ (France) and M1 (Finlande)** standards.
- TVOC emissions after 28 days **< 100 µg/m³**.
- Gerflor looselay solutions (GFT rolls, tiles and snap-together planks): no glue required.



VOC Free system



Recycled Content

Our tiles and planks floors contain an average of 28% recycled material (production waste, installation waste, end-of-life products).


All our recycled content is controlled and compliant with the European REACH regulation. The integration of recycled materials does not degrade the quality or performance of the products.



Gerflor is a French company with heart of production in France and Belgium

82% of products sold in France are made in France

By working as much as possible locally, we reduce our carbon impact linked to transport.

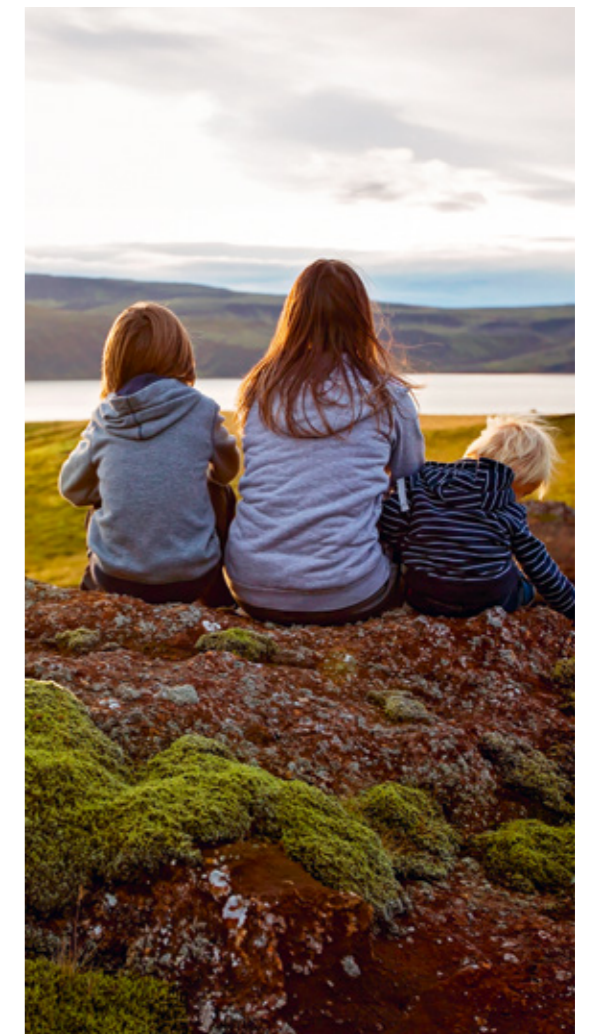

Before

After



Interior designer


Simulate your renovation project with Gerflor




Thanks to our real-time simulation tools, you can integrate our floors directly into the photo of your home and choose the ideal color. Let your creativity speak and visualize the result before even starting the renovation work.





Gerflor Decoration trends

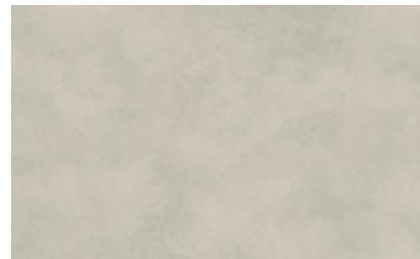

BIO LIVING

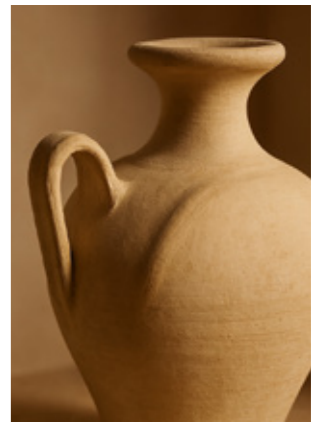

TERRA NOVA

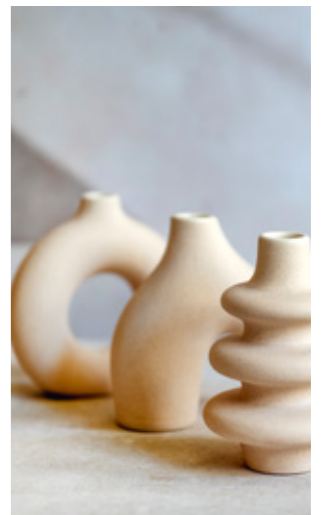

Gerflor Decoration trends



MODERN RUSTIC



Cleveland Dark



Pepper Taupe



Muscade



NEO CLASSIC













Soleiado



LVT solutions

Gerflor 2026

Make the right choice!

	Ready to install	Interlocking	Interlocking		Self Adhesive
	SENSO UNIK	SENSO PREMIUM RIGID ACOUSTIC	SENSO CLIC	SENSO 20 LOCK	SENSO SELF-ADHESIVE
 Renovation	✓ if joints <3mm depth & 1mm width	✓ If joints <8mm depth & 3mm width	✓ if joints <5mm depth & 2mm width	✗	✗
Thickness (mm)	3.5	5.70	4.2	3.4	2
 Traffic resistance	+++	++++	+++	++	++
Wear layer thickness (mm)	0.4	0.55	0.4	0.2	0.2
European classification	23 / 32	23 / 33	23 / 32	22	22
 Sound insulation (dB)	17	21	4	3	3
 Price	€ €	€ € €	€ €	€	€
 Suitable for wet rooms		✓		✓	
 Installation in front of bay window (max 60°C) and Velux		✓		✓	
 Veranda installation		✗		✗	
 Underfloor heating compatibility (reversible floor and heated floor with T<28°C)		✓		✓	
 Pets compatibility		✓		✓	
 Domestic use guarantee*	12 ans	20 ans	12 ans	10 ans	10 ans
	Page 16	Page 24	Page 32	Page 40	Page 44





Unlimited design
pattern



Easy to install
No clic no glue



Acoustic
comfort



Suitable for
wet rooms



Scan and
discover
INTERIOR
DESIGNER



1



2



3



1-Madera Beige
Size: 121.9 x 20.3 cm
Code: 3994 1623
EAN: 3475710655036

2-Madera Miel
Size: 121.9 x 20.3 cm
Code: 3994 1616
EAN: 3475710655043

3-Madera Natural
Size: 121.9 x 20.3 cm
Code: 3994 1615
EAN: 3475710655029



1615 - Madera Natural



1

2

3

4

1-Soleiado
Size: 61 x 11.4 cm
Code: 3992 1618 - EAN: 3475710654916

2-Madera Miel
Size: 61 x 11.4 cm
Code: 3992 1616 - EAN: 3475710654893

3-Madera Castano
Size: 61 x 11.4 cm
Code: 3992 1617 - EAN: 3475710654909

4-Madera Natural
Size: 61 x 11.4 cm
Code: 3992 1615 - EAN: 3475710654886



1615 - Madera Natural
1618 - Soleiado



1617 - Madera Castano
1615 - Madera Natural
1616 - Madera Miel
1618 - Soleiado



1618 - Soleiadao




1620 - Nomade



1620 - Nomade


← OR →

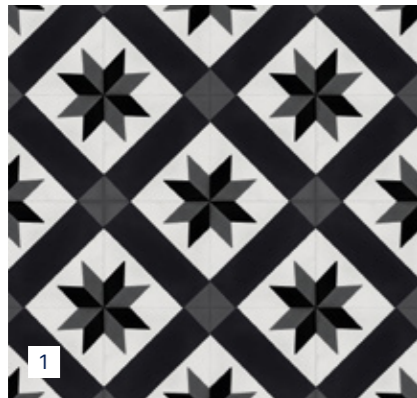


1



3

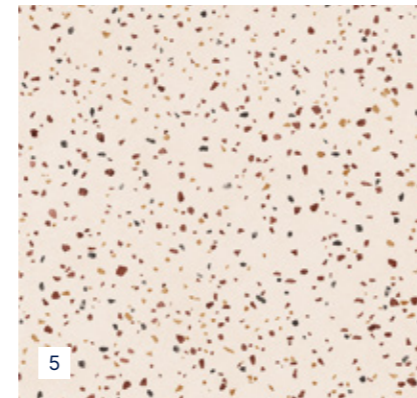


5

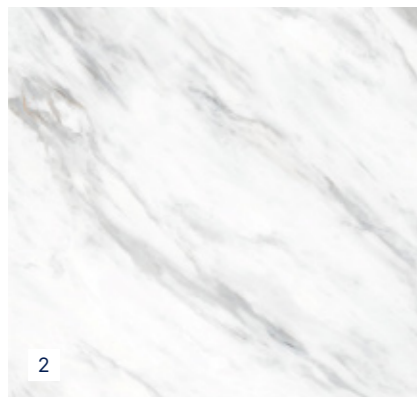

2





4

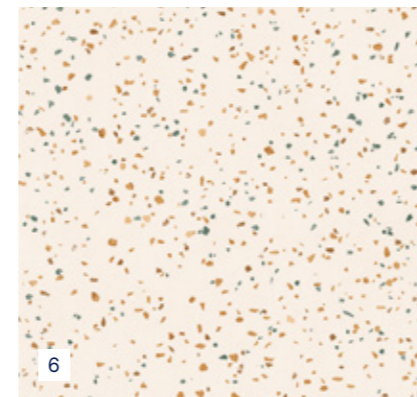

6



Nomade
Size: 61 x 61 cm
Code: 3993 1620 - EAN: 3475710654961

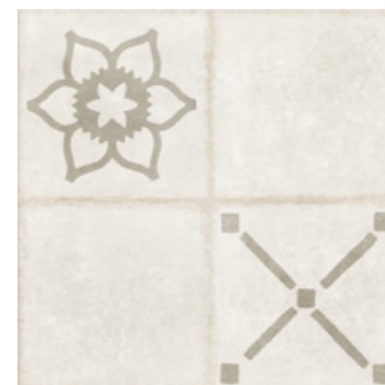

1-Cordoba Black
Size: 61 x 61 cm
Code: 3993 1034 - EAN: 3475710655012


3-Suave Grey
Size: 61 x 61 cm
Code: 3993 9077 - EAN: 3475710654985

5-Felizia Ocre
Size: 61 x 61 cm
Code: 3993 1621 - EAN: 3475710654947

2-Soleiadao
Size: 61 x 61 cm
Code: 3993 1618 - EAN: 3475710654992

4-Suave Beige
Size: 61 x 61 cm
Code: 3993 1619 - EAN: 3475710654978

6-Felizia Azure
Size: 61 x 61 cm
Code: 3993 1622 - EAN: 3475710654954





Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	3.5		
Thickness of wearlayer	EN ISO 24340	mm	0.4		
Weight: Mass per unit area	EN ISO 23997	g/sqm	4665		
Size	EN ISO 24342	cm	planks: 20.3 × 121.9	planks: 11.4 × 61	tiles: 61 × 61
Number of planks / tiles and sqm per box	-	planks / tiles	12 planks / 2.97 sqm	36 planks / 2.51 sqm	6 tiles / 2.23 sqm

Classification			
Norm / Product specification	-	-	EN ISO 11638
Fire rating - Classification	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51130	class	R9

Performance			
Wear Resistance	EN 660.2	mm³	< 2.0
Wear group	EN 649	group	T
Type Binder content	EN ISO 11638	group	I
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.15
Sound insulation	EN ISO 717-2	dB	17
Room impact noise	NF S 31074	dB	72
Castor chair test	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical Products Resistance	EN ISO 26987	-	OK

Environment / Indoor Air Quality			
TVOC after 28 days	ISO 16000-6	µg/m³	< 100

CE Marking			
	EN 14041	-	

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



SENSO PREMIUM RIGID ACOUSTIC

MADE IN
BELGIUM



**30% lighter than
standard SPC**



**Acoustic underlayer
integrated**

Comfort & impact sound
reduction



**Direct laying
on ceramic**

Max 8mm / 3mm



**Bay window
installation**

Max 60°




Scan and
discover
INTERIOR
DESIGNER

LVT Tiles & planks
interlocking

SENSO PREMIUM RIGID ACOUSTIC



1

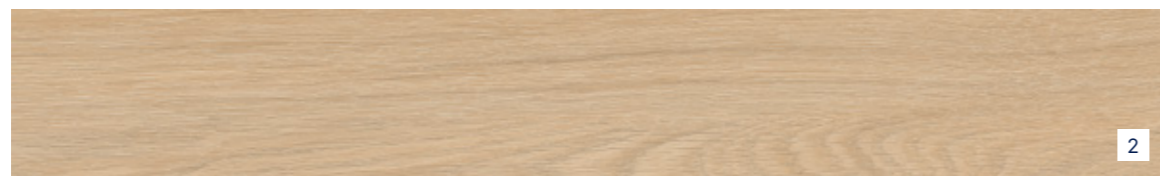


2



3




4

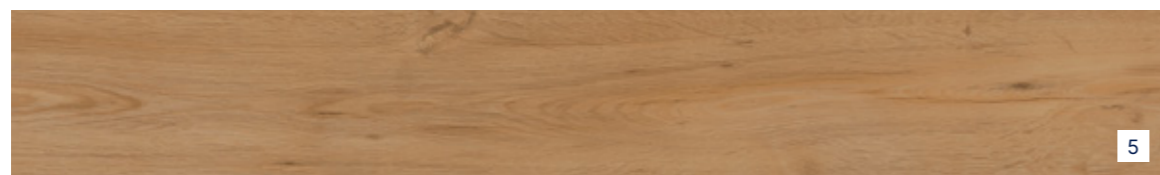

5



6

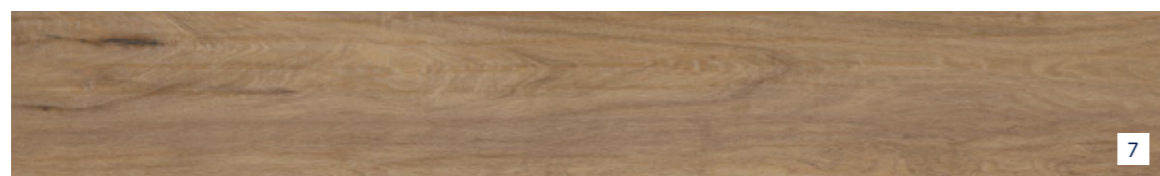

7



8



9



1-Country Light
Size: 125 x 22.9 cm
Code: 3947 1541 - EAN: 3475710633010

2-Country Beige
Size: 125 x 22.9 cm
Code: 3947 1625 - EAN: 3475710655265

3-Meadow Honey
Size: 125 x 22.9 cm
Code: 3947 1540 - EAN: 3475710632990

4-Columbia Taupe
Size: 125 x 22.9 cm
Code: 3947 0953 - EAN: 3475710655210

5-Columbia
Size: 125 x 22.9 cm
Code: 3947 0837 - EAN: 3475710655203

6-Meadow Spring Honey
Size: 125 x 22.9 cm
Code: 3947 1507 - EAN: 3475710655258

7-Authentic Nature
Size: 125 x 22.9 cm
Code: 3947 0828 - EAN: 3475710655227

8-Pecan
Size: 125 x 22.9 cm
Code: 3947 0511 - EAN: 3475710655241

9-Sunny White
Size: 125 x 22.9 cm
Code: 3947 0286 - EAN: 3475710655234




1540 - Meadow Honey

LVT Tiles & planks
Interlocking

SENSO PREMIUM RIGID ACOUSTIC




- 1-Country Natural**
Size: 149.2 x 22.9 cm
Code: 4044 1628 - EAN: 3475710655388
- 2-Bambi Fauve**
Size: 149.2 x 22.9 cm
Code: 4044 1629 - EAN: 3475710655395
- 3-Country Brown**
Size: 149.2 x 22.9 cm
Code: 4044 1627 - EAN: 3475710655371



LVT Tiles & planks
Interlocking

SENSO PREMIUM RIGID ACOUSTIC

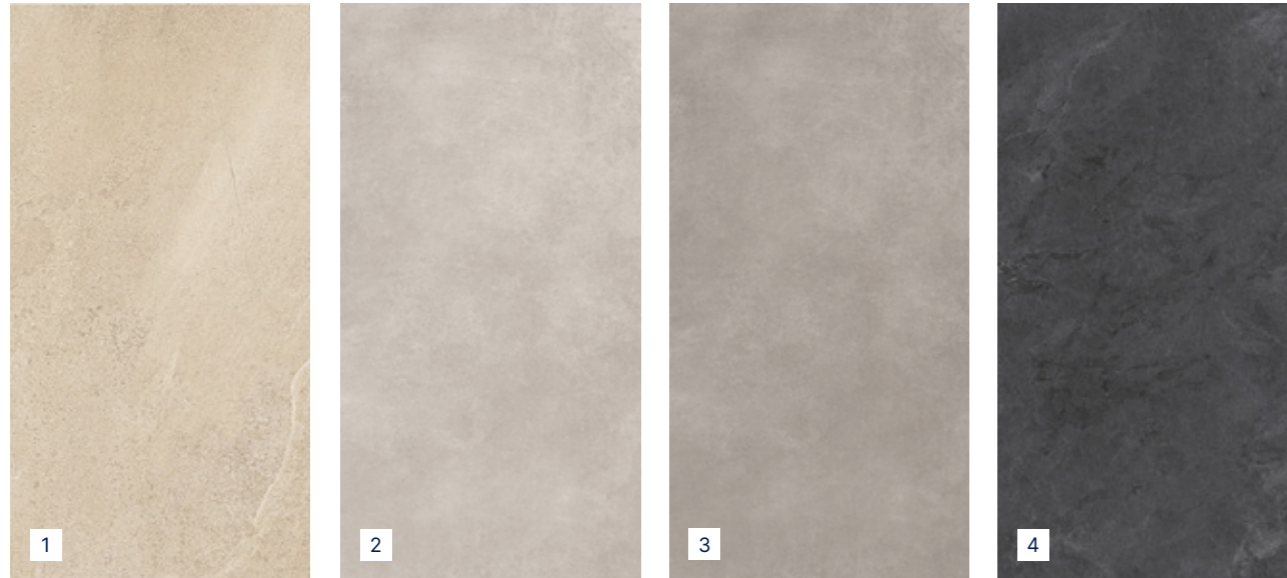

1-Sandy Stone
Size: 73 x 39.9 cm
Code: 3948 1611
EAN: 3475710654848

2-Pepper Light
Size: 73 x 39.9 cm
Code: 3948 0890
EAN: 3475710633027

3-Pepper Taupe
Size: 73 x 39.9 cm
Code: 3948 0889
EAN: 3475710654831

4-Grey Marble
Size: 73 x 39.9 cm
Code: 3948 1539
EAN: 3475710633034



Technical Characteristics

Description

Total thickness	EN ISO 24346	mm	5.70	
Thickness of wearlayer	EN ISO 24340	mm	0.55	
Weight: mass per unit area	EN ISO 23997	g/sqm	7000	
Size	EN ISO 24342	cm	planks: 22.9 x 125	tiles: 39.9 x 73
Number of planks / tiles and sqm per box	-	planks / tiles	7 planks / 2 sqm	7 tiles / 2.04 sqm

Classification

Norm / Product specification	-	-	EN ISO 10582	
Fire rating - Classification	EN 13501-1	class	Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2	
Slip Resistance Wet	EN 16165:2021 - Appendix B (DIN 51 130)	class	R10	

Performance

Wear resistance	EN 660.2	mm ³	< 2.0	
Wear group	-	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15	
Dimensional stability (average measured value)	-	%	≤ 0.10	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	21	
Room impact noise	NF S 31074	dB	79	
Castor chair test	ISO 4918	-	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 105 - B02	degree	≥ 6	
Surface treatment	-	-	Pureclean+®	
Chemical products resistance	EN ISO 26987	class	OK	

Environment / Indoor Air Quality

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	
--------------------	-------------	-------------------	------	--

Ce Marking

	EN 14041	
--	----------	--

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



SENSO CLIC

MADE IN
FRANCE



Easy to install and cut



Renovation installation

Direct laying on ceramic



Suitable for
wet rooms



Scan and
discover
INTERIOR
DESIGNER

LVT Tiles & planks
Interlocking

SENSO CLIC



1-Pecan Light
 Size: 123.9 x 21.2 cm
 Code: 6121 1300 - EAN: 3475710632952

3-Pecan Nature
 Size: 123.9 x 21.2 cm
 Code: 6121 0950 - EAN: 3475710643170

5-Pecan
 Size: 123.9 x 21.2 cm
 Code: 6121 0511 - EAN: 3475710632969

2-Simba Nature
 Size: 123.9 x 21.2 cm
 Code: 6121 1028 - EAN: 3475710643187

4-Columbia Pearl
 Size: 123.9 x 21.2 cm
 Code: 6121 0954 - EAN: 3475710643217



1300 - Pecan Light



0955 - Lord Honey

LVT Tiles & planks
Interlocking



1-Scandinav Light
 Size: 123.9 x 21.2 cm
 Code: 6121 1515 - EAN: 3475710643248

2-Scandinav Medium
 Size: 123.9 x 21.2 cm
 Code: 6121 1512 - EAN: 3475710632945

3-Scandinav Honey
 Size: 123.9 x 21.2 cm
 Code: 6121 1513 - EAN: 3475710643231

4-Lord Honey
 Size: 123.9 x 21.2 cm
 Code: 6121 0955 - EAN: 3475710632938

5-Scandinav Dark
 Size: 123.9 x 21.2 cm
 Code: 6121 1514 - EAN: 3475710643224

SENSO CLIC



1297 - Shale Black



1511 - Travertin Ivory



1-Gotha Clear
Size: 72.9 x 38.9 cm
Code: 6122 0938
EAN: 3475710645761

2-Manhattan Clear
Size: 72.9 x 38.9 cm
Code: 6122 0826
EAN: 3475710632976


3-Pepper Taupe
Size: 72.9 x 38.9 cm
Code: 6122 0889
EAN: 3475710646034

4-Shale Black
Size: 72.9 x 38.9 cm
Code: 6122 1297
EAN: 3475710632983



1-Travertin Ivory
Size: 72.9 x 38.9 cm
Code: 6122 1511
EAN: 3475710645785

2-Pietra Beige
Size: 72.9 x 38.9 cm
Code: 6122 1510
EAN: 3475710645778





Technical Characteristics

Description

Total thickness	EN ISO 24346	mm	4.20	
Thickness of wearlayer	EN ISO 24340	mm	0.40	
Weight: Mass per unit area	EN ISO 23997	g/sqm	6700	
Size	EN ISO 24342	cm	planks: 21.2 × 123.9	tiles: 38.9 × 72.9
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 2.10 sqm	7 tiles / 1.98 sqm

Classification

Norm / Product specification	-	-	EN ISO 10582	
Fire rating - Classification	EN 13501-1	class	B _{ff} -s1	
Static electrical propensity	EN 1815	kV	< 2	

Performance

Wear resistance	EN 660.2	mm ³	< 2.0	
Wear group	-	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15	
Dimensional stability (average measured value)			0.05	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	4	
Room impact noise	NF S 31074	dB	79	
Castor chair test (Type W)	ISO 4918	-	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Surface treatment	-	-	Pureclean+®	
Chemical products resistance	EN ISO 26987	class	OK	

Environment / Indoor Air Quality

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	
--------------------	-------------	-------------------	------	--

CE Marking

	EN 14041	
--	----------	--

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



SENSO 20 LOCK

Click... it's done!



Quick & easy installation



New exclusive designs



Suitable for wet rooms



Scan and discover
INTERIOR
DESIGNER

SENSO 20 LOCK

NEW



1

1-Bark Clear
Size: 121.9 x 17.8 cm
Code: 4198 1766
EAN: 3475710680434

NEW



2

2-Bark Honey
Size: 121.9 x 17.8 cm
Code: 4198 1767
EAN: 3475710680441

NEW





3

3-Bark Medium
Size: 121.9 x 17.8 cm
Code: 4198 1768
EAN: 3475710680458





Technical Characteristics

Description			
Total thickness	EN ISO 24346	mm	3.40
Thickness of wearlayer	EN ISO 24340	mm	0.20
Weight	EN ISO 23997	g/sqm	6360
Size	EN ISO 24342	cm	planks: 17.78 x 121.92
Number of planks / tiles and sqm per box	-	planks /tiles	9 planks / 1.95 sqm
Classification			
Norm / Product specification	-	-	EN ISO 10582
Fire rating - Classification	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip Resistance Wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9
Performance			
Wear resistance	EN 660.2	mm ³	<2.0
Wear group	-	group	T
Type binder content	ISO 10582	type	I
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Sound insulation	EN ISO 717-2	dB	4
Room impact noise	NF S 31074	dB	80
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical products resistance	EN ISO 26987	class	OK
Surface treatment	-	-	PUR+
Guarantee for residential use	-	year	10
Environment / Indoor Air Quality			
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
CE Marking			
	EN 14041	-	

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



SENSO SELF-ADHESIVE

Installed quickly & easily!



Self-adhesive collection

Installation on smooth surface



Quick & Easy Installation

No glue, no joints, no spacers
Can be cut with a utility knife
Dust-free




Suitable for wet rooms




Scan and discover
INTERIOR
DESIGNER

LVT Tiles & planks
Self adhesive

SENSO RUSTIC

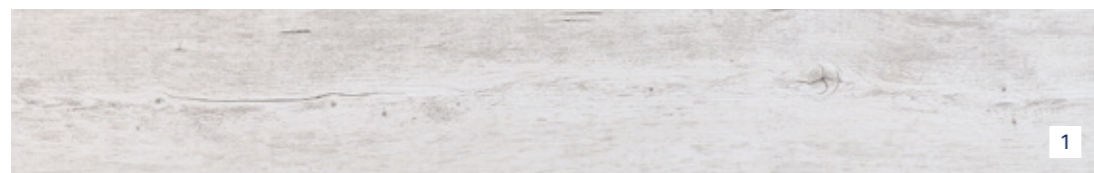


1

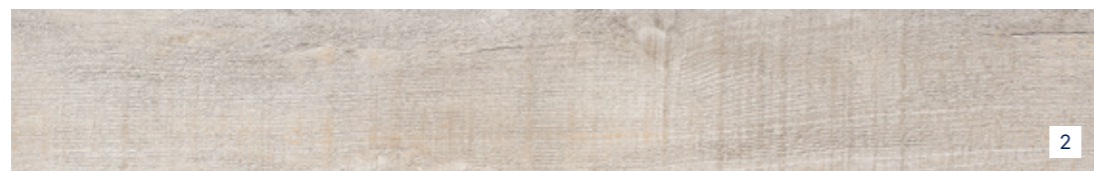

2



3

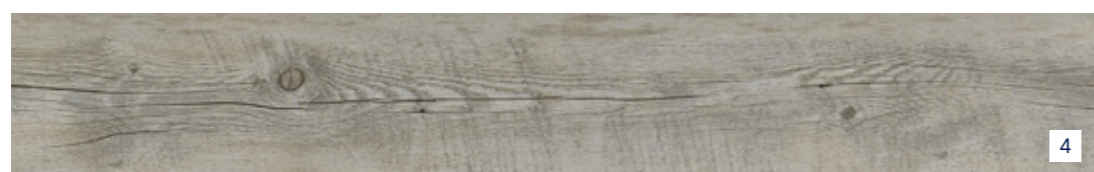


4



5



6

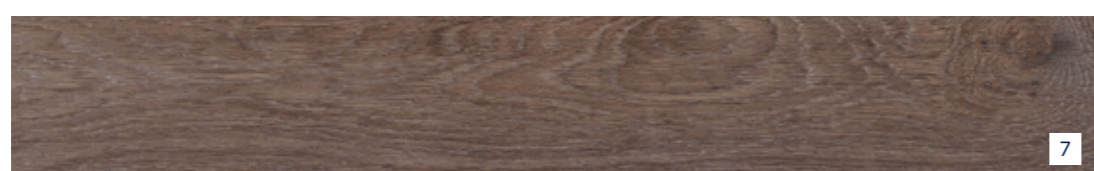

7



0394 - White Pecan

- 1-White Pecan**
AS: Size: 91.4 x 15.2 cm
Code: 3325 0394 - EAN: 3475710304651
- 2-Kola**
AS: Size: 91.4 x 15.2 cm
Code: 3325 0309 - EAN: 3475710247538
- 3-Imperial Pearl**
AS: Size: 91.4 x 15.2 cm
Code: 3325 1014 - EAN: 3475710602320
- 4-Pecan**
BD: Size: 91.4 x 15.2 cm
Code: 3327 0511 - EAN: 3475710250385
- 5-Muscade**
BD: Size: 91.4 x 15.2 cm
Code: 3327 0306 - EAN: 3475710250408
- 6-Noisette**
BD: Size: 91.4 x 15.2 cm
Code: 3327 0311 - EAN: 3475710250392
- 7-Cleveland Dark**
AS: Size: 91.4 x 15.2 cm
Code: 3325 0728 - EAN: 3475710606106

SENSO NATURAL




0577 - Authentic Nature

- 1-Sunny Light**
VS: Size: 91.4 x 15.2 cm
Code: 3280 0996
EAN: 3475710551550
- 2-Columbia**
VS: Size: 91.4 x 15.2 cm
Code: 3280 0347
EAN: 3475710391088
- 3-Noyer Naturel**
VS: Size: 91.4 x 15.2 cm
Code: 3280 0018
EAN: 3475710235238
- 4-Authentic Nature**
VS: Size: 91.4 x 15.2 cm
Code: 3280 0577
EAN: 3475710602122
- 5-Travertin**
VS: Size: 30.5 x 60.9 cm
Code: 3374 0201
EAN: 3475710320385
- 6-Night Slate**
VS: Size: 30.5 x 60.9 cm
Code: 3374 0397
EAN: 3475710319419



5

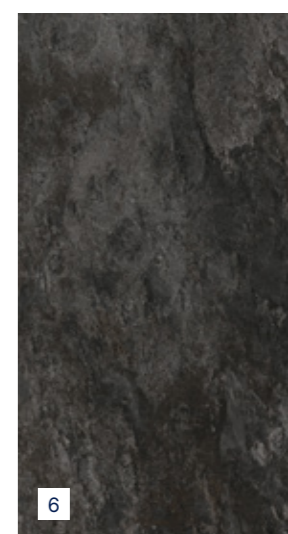

6

LVT Tiles & planks
Self adhesive



0301 - Ceruse Blanc

1



Technical Characteristics


Description			PLANKS	TILES
	Total thickness	EN ISO 24346	mm	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.20	0.20
Weight: mass per unit area	EN ISO 23997	g/sqm	3920	3425
Size	EN ISO 24342	cm	planks: 91.4 × 15.2	tiles: 30.5 × 60.9
Number of planks / tiles and sqm per box	-	planks / tiles	16 planks / 2.20 sqm	12 tiles / 2.22 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propriety	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+

CE Marking	EN 14041	Icons
	EN 14041	


Areas of use: domestic use



2

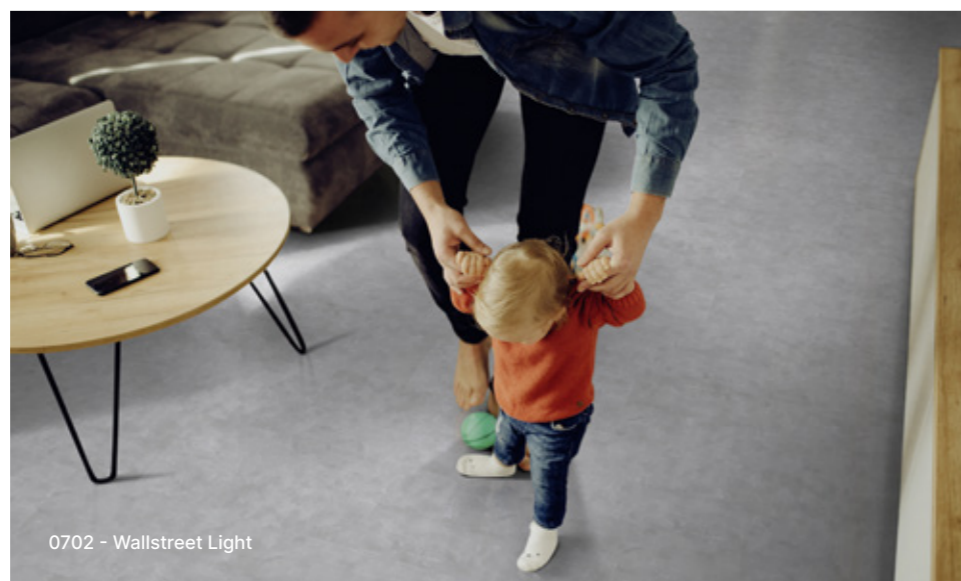

0702 - Wallstreet Light



1-Ceruse Blanc
 VS: Size: 91.4 × 15.2 cm
 Code: 3326 0301 - EAN: 3475710247897

2-Wallstreet Light
 Size: 30.5 × 60.9 cm
 Code: 3375 0702 - EAN: 3475710391095

SCAN AND DISCOVER

- The complete range
- Laying
- Video installation

Primer Performance

- Effective and long-lasting adhesion on all adhesive products
- Reduces porosity, improves the adhesion of adhesive tiles & planks, blocks dust and grease from the surface
- Easy to apply: with a roller
- No odour: without solvents

6x1 kg
 0572 0001
 EAN: 3475710223839

4x3 kg
 0571 0001
 EAN: 3475710216718

Vinyl tiles

SELF-ADHESIVES

Installed quickly & easily!



Quick & Easy Installation

Can be cut with a utility knife



Suitable for wet rooms



Easy cleaning



DESIGN



PRIME



Scan and discover
INTERIOR DESIGNER

Vinyl tiles

SELF-ADHESIVES


Design



Prime



- 1-White Tile**
Size: 30.5 × 30.5 cm
Code: 3237 0224 - EAN: 3475710186844
- 2-Slate Anthracite**
Size: 30.5 × 30.5 cm
Code: 3237 0220 - EAN: 3475710186820
- 3-Black Tile**
Size: 30.5 × 30.5 cm
Code: 3237 0221 - EAN: 3475710186837
- 4-Granite Grey**
Size: 30.5 × 30.5 cm
Code: 4556 0130 - EAN: 3475710099380
- 5-Marble Beige**
Size: 30.5 × 30.5 cm
Code: 4556 0135 - EAN: 3475710099410
- 6-Wood Clear**
Size: 30.5 × 30.5 cm
Code: 4556 0139 - EAN: 3475710099434



0130 - Granite Grey

Technical Characteristics

			DESIGN	PRIME
Description				
Total thickness	EN ISO 24346	mm	1.50	1.30
Thickness of wearlayer	EN ISO 24340	mm	0.08	0.08
Weight: Mass per unit area	EN ISO 23997	g/sqm	2550	2190
Size	EN ISO 24342	cm	tiles: 30.5 × 30.5	tiles: 30.5 × 30.5
Number of planks / tiles and sqm per box	-	tiles	11 tiles / 1 sqm	11 tiles / 1 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propensity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9 / R10	R9 / R10
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	< 0.40	< 0.40
Residual Indentation	EN ISO 24343-1	mm	0.04	0.04
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Garantee for residential use	-	year	7	3
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+

CE Marking

	EN 14041	
--	----------	--

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation

DESIGN / PRIME



How to care For your Gerflor floor

Safety tips

- Use plastic coasters or felt pads under the feet of furniture and other heavy objects.
- Protect from sources of heat and spills.



Cleaning

Regular cleaning: use a vacuum and a damp mop with a standard, no-rinse detergent solution.

Gerflor recommends using its Power Cleaner for routine cleaning.

Deep cleaning (every 6-12 months): to make your floor shine like new again, use a restorative product.

Gerflor recommends using its Renovator Polish to protect and enhance the look of your floor. It leaves a matte finish and brightens up colours.

Stubborn stains: use diluted bleach, white spirit, alcohol or lemon juice.

- Stains such as tomato sauce, mustard, beet juice, blood, ink and iodine: use diluted bleach, allowing it to sit for several minutes and then rinsing thoroughly.
- Rust stains: clean with fabric rust remover and rinse thoroughly.
- Marker, pen, grease and glue stains: rub gently with a cloth moistened with white spirit, and rinse thoroughly.

Products to avoid: acetone, chlorinated solvents such as trichlorethylene, wax, glaze.

LVT Numerical Index

Design Color	Color Code	Type	Range	Size mm	Page
Cordoba Black	39931034	Tiles	SENSO UNIK	610 X 610	20
Felizia Azure	39931622	Tiles	SENSO UNIK	610 X 610	20
Felizia Ocre	39931621	Tiles	SENSO UNIK	610 X 610	20
Madera Beige	39941623	Planks	SENSO UNIK	1219 X 203	18
Madera Miel	39941616	Planks	SENSO UNIK	1219 X 203	18
Madera Natural	39941615	Planks	SENSO UNIK	1219 X 203	18
Nomade	39931620	Tiles	SENSO UNIK	610 X 610	21
Soleiado	39931618	Tiles	SENSO UNIK	610 X 610	20
Suave Beige	39931619	Tiles	SENSO UNIK	610 X 610	20
Suave Grey	39939077	Tiles	SENSO UNIK	610 X 610	20
Madera Castano	39921617	Planks	SENSO UNIK HB	610 X 114	19
Madera Miel	39921616	Planks	SENSO UNIK HB	610 X 114	19
Madera Natural	39921615	Planks	SENSO UNIK HB	610 X 114	19
Soleiado	39921618	Planks	SENSO UNIK HB	610 X 114	19
Authentic Nature	39470828	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Bambi Fauve	40441629	Planks	SENSO PREMIUM RIGID AC	1492x229	29
Columbia	39470837	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Columbia Taupe	39470953	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Country Beige	39471625	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Country Brown	40441627	Planks	SENSO PREMIUM RIGID AC	1492x229	29
Country Light	39471541	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Country Natural	40441628	Planks	SENSO PREMIUM RIGID AC	1492x229	29
Grey Marble	39481539	Tiles	SENSO PREMIUM RIGID AC	730x399	30
Meadow Honey	39471540	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Meadow Spring Honey	39471507	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Pecan	39470511	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Pepper Light	39480890	Tiles	SENSO PREMIUM RIGID AC	730x399	30
Pepper Taupe	39480889	Tiles	SENSO PREMIUM RIGID AC	730x399	30
Sandy Stone	39481611	Tiles	SENSO PREMIUM RIGID AC	730x399	30
Sunny White	39470286	Planks	SENSO PREMIUM RIGID AC	1250x229	26
Columbia Pearl	61210954	Planks	SENSO CLIC 3	1239 x 212	34
Gotha Clear	61220938	Tiles	SENSO CLIC 3	729 x 389	36
Lord Honey	61210955	Planks	SENSO CLIC 3	1239 x 212	35
Manhattan Clear	61220826	Tiles	SENSO CLIC 3	729 x 389	36
Pecan	61210511	Planks	SENSO CLIC 3	1239 x 212	34
Pecan Light	61211300	Planks	SENSO CLIC 3	1239 x 212	34
Pecan Nature	61210950	Planks	SENSO CLIC 3	1239 x 212	34
Pepper Taupe	61220889	Tiles	SENSO CLIC 3	729 x 389	36
Pietra Beige	61221510	Tiles	SENSO CLIC 3	729 x 389	37
Scandinav Dark	61211514	Planks	SENSO CLIC 3	1239 x 212	35
Scandinav Honey	61211513	Planks	SENSO CLIC 3	1239 x 212	35
Scandinav Light	61211515	Planks	SENSO CLIC 3	1239 x 212	35
Scandinav Medium	61211512	Planks	SENSO CLIC 3	1239 x 212	35
Shale Black	61221297	Tiles	SENSO CLIC 3	729 x 389	36
Simba Nature	61211028	Planks	SENSO CLIC 3	1239 x 212	34
Travertin Ivory	61221511	Tiles	SENSO CLIC 3	729 x 389	37
Bark Clear	41981766	Planks	SENSO 20 LOCK	1219 X 178	42
Bark Honey	41981767	Planks	SENSO 20 LOCK	1219 X 178	42
Bark Medium	41981768	Planks	SENSO 20 LOCK	1219 X 178	42
Cleveland Dark	33250728	Planks	SENSO RUSTIC	914 x 152	46
Imperial Pearl	33251014	Planks	SENSO RUSTIC	914 x 152	46
Kola	33250309	Planks	SENSO RUSTIC	914 x 152	46
Muscade	33270306	Planks	SENSO RUSTIC	914 x 152	46
Noisette	33270311	Planks	SENSO RUSTIC	914 x 152	46
Pecan	33270511	Planks	SENSO RUSTIC	914 x 152	46
White Pecan	33250394	Planks	SENSO RUSTIC	914 x 152	46
Authentic Nature	32800577	Planks	SENSO NATURAL	914 x 152	47
Columbia	32800347	Planks	SENSO NATURAL	914 x 152	47
Night Slate	33740397	Tiles	SENSO NATURAL	609 x 305	47
Noyer Naturel	32800018	Planks	SENSO NATURAL	914 x 152	47
Sunny Light	32800996	Planks	SENSO NATURAL	914 x 152	47
Travertin	33740201	Tiles	SENSO NATURAL	609 x 305	47
Ceruse Blanc	33260301	Planks	SENSO URBAN	914 x 152	48
Wallstreet Light	33750702	Tiles	SENSO URBAN	609 x 305	48
Black Tile	32370221	Tiles	DESIGN	305 x 305	52
Slate Anthracite	32370220	Tiles	DESIGN	305 x 305	52
White Tile	32370224	Tiles	DESIGN	305 x 305	52
Granite Grey	45560130	Tiles	PRIME	305 x 305	52
Marble Beige	45560135	Tiles	PRIME	305 x 305	52
Wood Clear	45560139	Tiles	PRIME	305 x 305	52

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: +61 1 800 060 785
New Zealand Tel: + 64 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.
Tel: +420 725 815 902

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95
e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorir@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no


SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

follow us:     

We care / we act our commitments for 2030

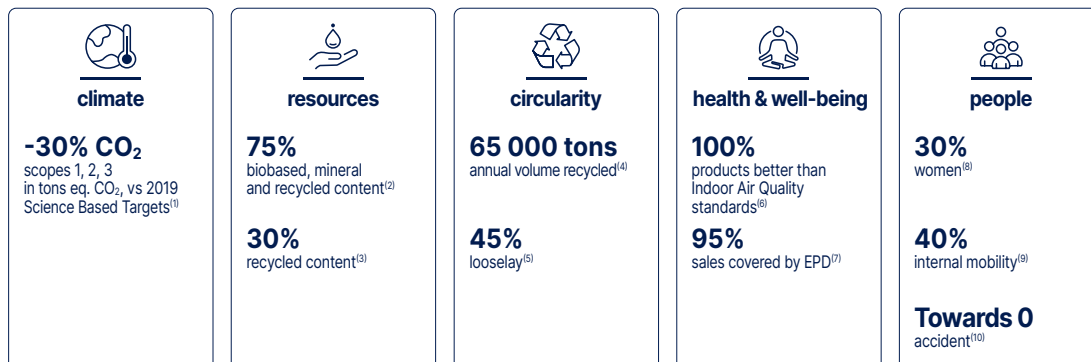

More details: 1. Scopes 1, 2 & 3, in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2. Origin of raw materials for the entire Floor & Wall portfolio, on average, by weight; including 15% virgin salt, a primary element in vinyl manufacturing. Compared to 71% in 2024. 3. Average content in the Floor & Wall vinyl portfolio, by weight. Compared to 21% in 2024. 4. Recycled in our factories and recycling units. Compared to 59 040 tons in 2024. 5. % of Floor activity with non-glued products, easy to remove, easy to re-use. Compared to 40% in 2024. 6. 100% of vinyl and linoleum sold to the building market below 100 micrograms /m³ (TVOC 28 days). 7. % of Floor & Wall activity covered by Environmental Product Declarations (EPD). Compared to 44% in 2024. 8. % women in our global workforce and among our managers. Compared to respectively 26% and 27% in 2024. 9. % job openings filled with internal hires worldwide. Compared to 25% in 2024. 10. Towards 0 accident: Lost time accident per million hours worked: below 3 vs 8,9 in 2024, for Gerflor employees worldwide.

Gerflor[®]