

IN STOCK
NOW

Tarasafe H₂O **New**

High performance vinyl safety flooring for wet applications



Compact sheet

R11

Slip Resistant

B

Barefoot

HSE 50+

Slip Resistant

20

R_{tm}/R_z
Roughness

SparClean®

Treated



Easy to cut



A sustainable choice




100% recyclable
29% recycled content



REACH compliant



VOC < 100 µg/m³

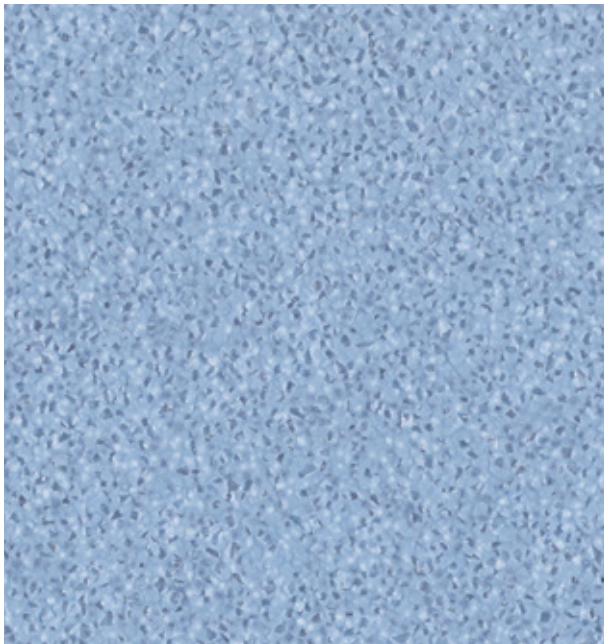


0036 Lagoa
NCS: 3020-R90B / LRV: 31.1




0025 Nile
NCS: 3010-Y50R / LRV: 43.4




0032 Malawi
NCS: 3005-Y50R / LRV: 40.1




0031 Eacham
NCS: 4005-Y50R / LRV: 34.3




0034 Zambezi
NCS: 5502-B / LRV: 19.9



0033 Rhine
NCS: 4000-N / LRV: 29.7



0024 Peyto
NCS: 3000-N / LRV: 43.7



0035 Bacalar
NCS: 4010-G30Y / LRV: 32.5



The Dementia Services Development Centre at the University of Stirling has approved Tarasafe H₂O for use within a dementia-inclusive environment



Scan here for matching WELD RODS

NCS: Natural Colour System
LRV: Light Reflectance Value



SAFETY FLOORING

Tarasafe H₂O **New**

gerflor.com / follow us



Z0014349

Tarasafe H₂O is a hardwearing safety flooring collection that comprises of a PVC wear layer containing deeply inlaid mineral particles and coloured elements for a subtle and soft design. It is an ideal solution for those areas where enhanced slip resistance is required for both barefoot and shod use, such as showers, wet rooms, bathrooms, & changing areas.

The specific embossing, together with the mineral particles, delivers a Class B barefoot slip resistance rating (according to EN 16165:2021-A and AS 4586-C) and R11 shod slip resistance rating (according to EN 16165:2021-B and AS 4586-D). It delivers Safety in Numbers, with a PTV >50 slip resistance (Dry & Wet), a R11 wet slip resistance rating and >20 Rtm/Rz surface roughness in accordance with HSE guidelines.

The revolutionary SparClean® surface treatment improves the product performance in terms of stain resistance and durability. It is reinforced with a glass fibre grid in sheet form for improved durability and is 100% recyclable. It contains 29% recycled content.



Anti bacterial activity against MRSA of 99% after 24h00.



High level of wet and dry slip resistance.



It provides exceptional barefoot comfort and is an ideal solution for shower and wet rooms between shower and changing areas.

Tarasafe H₂O

Description			
Total thickness on grain side	EN ISO 24346	mm	2.0
Wear layer thickness	EN ISO 24340	mm	0.85
Weight	EN ISO 23997	g/m ²	2350
Width/Length of Sheet	EN ISO 24341	cm/lm	200/20
Classification			
Norm/Product Specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire Rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	≤ 2
Slip resistance - Pendulum Test (dry & wet)	AS 4586-A	class	P5
	EN 16165:2021 – Appendix C (BS 7976-2)	PTV	> 50
Surface roughness	-	µm	Rz ≥ 20
Slip resistance wet: Ramp test with oil	EN 16165:2021 – Appendix B (DIN 51130)	class	R11
	AS 4586-D	class	R11
Slip resistance wet: Ramp test with water	EN 16165:2021 – Appendix A (DIN 51097)	class	B
	AS 4586-C	class	B
Slip resistance - ramp test	EN 13845 -C	class	ESf-ESb
Performances			
Type binder content	EN ISO 10582	Type	I
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10
Castor Chair test (type W)	ISO 4918	-	OK
Thermal Conductivity	EN ISO 10456	W/(m.K)	0.25
Colour Fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	SparClean®
Chemical Products Resistance	EN ISO 26987	-	OK
Anti-bacterial activity (MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth
Use in special wet areas	EN 13553	-	OK
Environment/indoor air quality			
TVOC after 28 days	ISO 16000-6	micrograms/m ³	< 100
Certification	-	-	Floorscore®
Ce marking			
	EN 14041	-	

(1) The implementation of an effective cleaning method is the best defence against infection.

Uniclass Pr_35_57_71_60			
CI / SfB	(43)	n6	

UK reference



Installation and Maintenance Guidelines, as well as complementary ranges available on our Gerflor website.



IMPORTANT: The information contained in this document is valid from 01/04/2026 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force. Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

We care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg

CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution