


Recreation 60



- ① PUR Protect® surface treatment
- ② 100% PVC surface complex
- ③ Fibre-glass grid reinforcement
- ④ Closed cell foam backing

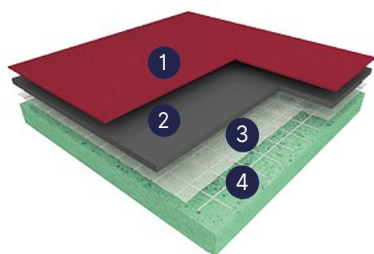

THE REFERENCE FOR SPORT & LEISURE

Description

P1-rated performance, comfort, and durability for education and community spaces.

- **P1 category:** high performance and safety for the players
- **PUR Protect®:** ease of maintenance and reduced maintenance cost
- **Closed cell foam backing reinforced by a fibre-glass grid:** high durability and performance

✂ Installation: Glue Down

🔊 Acoustics: 18 dB

🔥 Fire rating: Cfl-s1

🕒 10 years warranty

Sustainability



40%
Recycled content



100% Recyclable



Made in Europe (France)

Customise your floor to match the latest trends!

10 colours and wood designs:




6062
Canadian
Maple

6058
American Oak


2711
Gris

2402
Azul

6563
Menta



6160
Naranja




6154
Roja



6556
Verde



6614
Oceano



6157
Rosa

Possibility to customise the colour and designs upon request

**World's most used surface
for international sport events**
International Federation Certifications



Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	PUR Protect®
Surface complex	-	-	-	100% PVC
Foam	-	-	-	Closed cell foam
Thickness	EN ISO 24346	-	mm	6
Weight	EN ISO 23997	-	kg/m ²	3.7
Length	EN ISO 24341	-	lm	26.5 max
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	40
Recyclability	-	-	%	100
Sport properties				
Shock absorption	EN 14808	≥ 25	%	P1
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 3.5
Sliding coefficient	EN 13036-4	80 - 110	-	80 - 110
Ball bounce	EN 12235	≥ 90	%	≥ 90
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Impact sound insulation	EN ISO 717-2	-	dB	17
Classification				
Fire	EN 13501-1	-	-	Cfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Antiviral activity	ISO 21702	-	-	99.4% efficiency after 2h
Declaration of performance				
		DOP-005-1007-A	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Resistance to rolling load

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:

