


Taraflex® Portable 3.7



- 1 Triple Action ProtecSol® surface treatment
- 2 Coloured and embossed layer
- 3 Recycled calendered surface backing
- 4 Reinforcement with fibre-glass grid
- 5 CXP™ foam

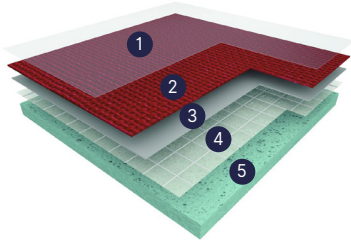

TARAFLEX®: THE REFERENCE SINCE 1947

Description

A portable system, ideal for lateral movements in Table Tennis and Pickleball.


- **CXP™ foam:** enhanced performance and safety
- **Triple-Action ProtecSol® surface treatment:** maximisation of slide and grip, lateral moves and accelerations
- **Reinforcement with fibre-glass grid:** high durability and outstanding dimensional stability
- **Specific embossing:** perfect texture for high competitions, providing perfect footing
- **Portable solution:** fast and easy to install or remove, which makes it ideal for events

🔪 Installation: Looselay

🔥 Fire rating: Cfl-s1

🕒 15 years warranty

6109 FRAMBOISE

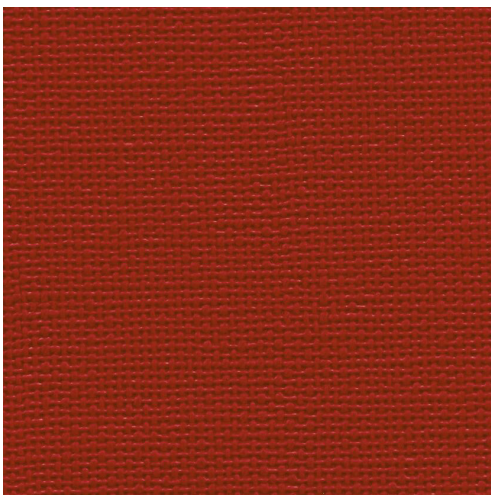

Possibility to customise the colour upon request

Sustainability



Best in class carbon footprint



39%
Recycled content



100% Recyclable



Made in Europe (France)

World's most used surface
for international sport events
International Federation Certifications



ITTF APPROVED

Technical Data Sheet

Description	Standard	Requirement	Units	Results
Surface treatment	-	-	-	Triple Action Protecso®
Surface complex	-	-	-	100% pur PVC
Foam	-	-	-	CXP™
Thickness	EN ISO 24346	-	mm	3.7
Weight	EN ISO 23997	-	kg/m²	1.9
Length	EN ISO 24341	-	lm	16
Width	EN ISO 24341	-	lm	1.5
Sustainability				
Recycled content	-	-	%	39
Recyclability	-	-	%	100
Sport properties				
Shock absorption	EN 14808	≥ 35	%	-
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 2
Sliding coefficient	EN 13036-4	80 - 110	-	80 - 110
Technical characteristics				
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	-
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Classification				
Fire	EN 13501-1	-	-	Cfl-s1
Anti-bacterial activity (1) (E. coli - S. aureus - MRSA)	ISO 22196	-	-	> 99% inhibits growth
Antiviral activity	ISO 21702	-	-	99.4% efficiency after 2h
Declaration of performance				
CE	DOP-005-1022-A	-	-	Fire Sliding Coefficient Abrasion Resistance

(1) The implementation of an effective cleaning method is the best defence against infection.

Others certifications:

